


1 9 9 3

GLASTRON®

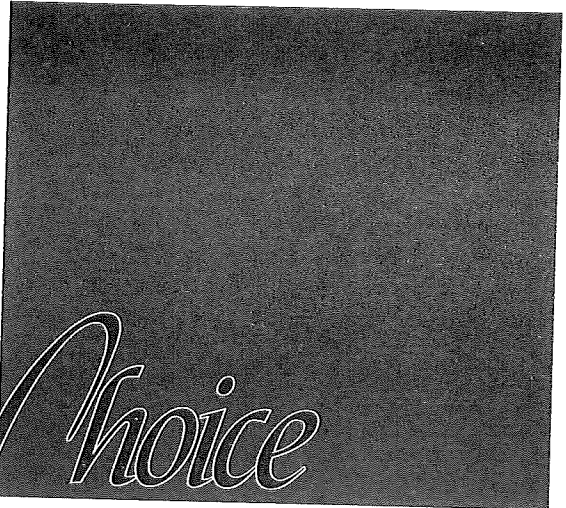

THE

Choice

OF EXPERIENCED BOATERS

PRODUCT SPECIFICATION MANUAL

"Glastron's 1993 model line is the culmination of three years of extensive research and development.

Glastron's advanced designs and the efficient use of technologically advanced materials are redefining the way boats will be built in the future.

Inspired by a vision of what boating should be, Glastron has achieved the optimum balance of performance, style, and comfort, making Glastron the best boating value of 1993."



Russell "Rusty" Kelley
President

GLASTRON®

THE *Choice* OF EXPERIENCED BOATERS

NO OTHER BOAT IS ENGINEERED TO PERFORM LIKE A GLASTRON...

That's why we're the Choice of Experienced Boaters. From the beginning, Glastron's singular focus has been to build a boat that outperforms any other runabout in its class... for the sole purpose of maximizing your boating pleasure.

Our passion for performance is firmly rooted in the belief that true boating enjoyment comes from a blend of the exhilarating feeling of a superb ride combined with the reassuring confidence of being in total control.

This commitment to performance excellence has been synonymous with the Glastron nameplate for over 35 years and has made us the choice of people who love boating.

Glastron has been widely acclaimed by marine experts for quicker responsiveness, precise tracking and agile maneuvering. Yet even with this enviable reputation, Glastron's search for perfection is never-ending.

The 1993 model line is the culmination of three years of research and development inspired by a vision of what boating should be.

A vision of increased passenger comfort, advanced styling, enhanced features, and improved performance, which all combine to deliver a better boating value.

Uninhibited by preconceived notions and free from the limitations of conventional technology, we developed a revolutionary new 1993 product line.

Starting with Glastron's legendary SSV hull, our engineers made subtle, precise changes that have dramatically improved performance. In addition, they've added a new, technologically advanced fiberglass stringer system.

The result: the creation of the SSV₂, a hull that will set the standard for the next generation. Designed with increased fuel efficiency and faster planing time, the SSV₂ is backed by Glastron's 5-year hull warranty, new for 1993.

Next, through computer modeling, Glastron engineers refined the exterior styling with gentle, flowing curves that combine the intelligence of aerodynamics with the elegance of classic design.

Then, to ensure that you get as much pleasure from riding in our boat as driving it, Glastron engineers completely rethought the design and placement of all interior features.

Through the use of advanced materials, our engineers have designed modular components that are meticulously integrated to enhance passenger comfort and maximize usable cockpit space.

In the pursuit of building a better boat, Glastron engineers made a commitment that no single aspect of boating enjoyment would come at the expense of another.

Glastron has achieved the optimum balance of superior performance, styling, and comfort, making it your best boating value for 1993.

At Glastron, we take your boating pleasure seriously.

No other boat is engineered to perform like a Glastron... that's why we're the Choice of Experienced Boaters.

FEATURES AND BENEFITS

Before you sell a Glastron –
make sure your customer
knows these facts:

FACTS:

35 years in the marine industry

Purchasing Power – owned by Genmar,
the largest independent boat builder

Performance by Design – winner of 9 awards in
10 years for top boat performance

* One of the top three most recognized names
in the industry

* Largest percentage of repeat customers

* Glastron owners use their boats on average
more than owners of other brands

* Glastron owners on average have boated
longer than owners of other brands

* Glastron owners consider boat handling and
performance as the #1 reason to buy a
Glastron

* Glastron dealers have been in business longer
on average than dealers of other brands – with
better service and high resale

* Glastron dealer reputation is considered higher
than other brand dealers surveyed.

*From an independent marine market survey conducted by
Irwin Broh and Associates, Inc.

Before your customer makes a choice –
shouldn't he compare
these features and benefits?

FEATURES:

BENEFITS:

- | | |
|---|---|
| 1. Solid foam core construction | Consistent overall strength without excessive weight for better performance |
| 2. Fiberglass stringer system on all boats except SSV 205, SSV 225, SSV 239 | Strength, no wood to rot, foam filled. 4 times wider than ordinary wood stringers |
| 3. Fiberglass encapsulated fir stringers (SSV 205, SSV 225, SSV 239 only) | Strength; plus eliminates premature wood rot. Also fir is stronger than pine used by many manufacturers |
| 4. Stringer system is bonded to hull with fiberglass | Rigid stringer system for strength |
| 5. Hull and deck joined with stainless steel screws not pop rivets | Better seal; much stronger boat overall |
| 6. Fiberglass molded bow liner bolted to floor | Eliminates wood rot problem; better appearance; stronger |
| 7. Keel areas are overlapped with fiberglass | Double strength in this all important area |
| 8. Floor is resin-coated, top to bottom | Protects against wood rot |
| 9. All exposed wood treated with wood life preservative | Longer life; eliminates wood rot |

FEATURES:

BENEFITS:

- 10. All deck fittings are backed by under-deck supports glassed into the deck
Strength; durability
- 11. Motor mounts are fiberglass encapsulated to the hull
Strength; reduces engine vibration
- 12. Aircraft locknuts on bolts
Strength; long term durability
- 13. Marine-grade carpet – one piece lock looped
Appearance; no seams
- 14. 32-ounce marine-grade vinyl
UV protected; marine-grade stitching
- 15. Carpeted storage areas bow and stern
Appearance; padding for boating gear
- 16. Carpeted ski locker with drain in sub-floor
Protects the ski; lets water drain away from the stringer system
- 17. Rotocast nylon seat bases
Eliminates wood; longer life
- 18. Custom-molded side panels
Lightweight, convenient storage, with no wood to rot
- 19. Bow storage drawers available on certain models
Roto-molded, one-piece construction for longer life
- 20. All new models feature new instrument panel
Easy-to-read gauges, convenient controls, improved styling

FEATURES:

BENEFITS:

- 21. Built-in swim platform w/stainless steel boarding ladder below platform
Ease of boarding; lower platform than most competition
- 22. 36 hours of offshore endurance testing on all new models
Test all component parts plus hull and deck strength before putting new models on market. Very few competitors go to this expense
- 23. Each new model is carefully designed for the proper weight to horsepower ratio
Complete design concentration on performance; better planing time; better fuel economy
- 24. Five-year hull warranty
Glastron backs its products
- 25. Choice of MerC or Volvo Power
Better choices for each type of boat use

There are many more facts and features that have allowed Glastron to be recognized as an industry leader in innovation and safety. Make sure your customers know why Glastron is...

THE *Choice* OF EXPERIENCED BOATERS

GLASTRON BOATS LIMITED WARRANTY

Glastron Boats, a Division of Genmar Industries, Inc. ("Manufacturer") warrants to the first retail purchaser of the products it manufactures, under the name Glastron Boats, which are registered with the manufacturer, that should the hull be proven to be structurally defective in material or workmanship under normal operating conditions: Manufacturer will make the structural repairs (or, at its sole discretion, replace the affected part) necessitated thereby for a period of five (5) years from the date the product was purchased by the first retail purchaser. Manufacturer also warrants to the first retail purchaser to repair (or replace at its sole discretion) non-structural defects in material and workmanship under normal operating conditions subject to the exclusions set forth below for a period of one (1) year. This limited warranty is subject to the following terms and conditions. Manufacturer's sole obligation and the buyer's sole and exclusive remedy against said Manufacturer for breach of the expressed warranty shall be for the repair or replacement of defective parts, free of charge, to the buyer.

If not demanded already, Manufacturer hereby demands that the first retail purchaser examine the product to discover any defects in material or workmanship and notify Manufacturer or the selling dealer of same. During the warranty period, warranty repairs will be made without charge by the selling dealer, at the dealer's store or service facility or, at Manufacturer's election, by Manufacturer at its factory. Transportation to and from Manufacturer's factory shall be at purchaser's expense. Manufacturer's election to repair the defective product or replace the defective part is the exclusive remedy of the first retail purchaser and is a condition precedent to any legal or equitable action against Manufacturer. Any action for breach of warranty relating to a product must be brought within a period of sixty (60) days following Manufacturer's failure to repair the product or replace the defective part.

EXCLUSIONS AND LIMITATIONS:

This warranty does not cover the following:

1. A product which has been repaired or altered without authorization of Manufacturer by persons other than Manufacturer or an authorized dealer or altered in any way so as to affect its use and operation;
2. Engines, outdrives, controls, propellers, batteries or other equipment or accessories which are not manufactured by Manufacturer whether or not warranted by such other manufacturers;
3. Gelcoat finish, cracking, crazing, blistering and osmotic blistering;
4. Windshield breakage;
5. Leakage around windshields, hatches or other apertures;
6. A product which has been subjected to unreasonable use, tampering, abuse, mishandling, improper maintenance, negligence, improper trailering, alteration, accident, or used for racing or commercial

7. A product which has been operated contrary to any printed instructions furnished by Manufacturer;
8. A product which has been overpowered according to the maximum recommended engine horsepower specified on the capacity plate affixed thereto;
9. Any representations relating to the speed of a product;
10. Loss of time, inconvenience, travel expense, loss of use, haul out, launch, towing, storage charges or other matters not specifically covered hereunder;
11. Dealer preparation, cleaning and final adjustments and alignments in preparing boat for delivery or commissioning;
12. Any act of God.

This warranty gives you specific rights, and you may also have other rights which vary from state to state. This warranty is governed by the law of the State of Minnesota (home state of division). This document contains the entire warranty given by Manufacturer and there are no terms, promises, conditions or warranties other than those contained herein. No oral or written information or advice given by Manufacturer, its dealers, representatives, agents or employees shall create a warranty or in any way increase the scope of this warranty. Manufacturer does not authorize any person to extend the time of this warranty or to create or assume for it any other obligation or liability with respect to its products. No person, including a dealer, is authorized to make any repairs or replacements under this warranty without the prior written approval of Manufacturer. Manufacturer reserves the right to improve its products through changes in design, material or parts without being obligated to incorporate such changes in products previously manufactured. This warranty is not transferable or assignable except where specifically provided to the contrary.

THIS EXPRESS WARRANTY IS IN LIEU OF, AND MANUFACTURER DISCLAIMS, ANY AND ALL OTHER WARRANTIES, EXPRESSED, IMPLIED OR STATUTORY, WHATSOEVER INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES UNDER THE UNIFORM COMMERCIAL CODE, ANY IMPLIED WARRANTY OF MERCHANTABILITY AND ANY IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. THIS WARRANTY SHALL BE THE SOLE AND EXCLUSIVE REMEDY OF ANY PERSON, WHETHER IN CONTRACT, TORT OR OTHERWISE AND MANUFACTURER SHALL NOT BE LIABLE FOR CONSEQUENTIAL, SPECIAL OR INCIDENTAL DAMAGE, LOST PROFITS, INCONVENIENCE, OR DAMAGE RESULTING FROM A BREACH OF THE EXPRESSED OR ANY IMPLIED WARRANTY WHICH IS NOT DISCLAIMED HEREIN NOR FOR ANY OTHER LOSS OR DAMAGE, EXCEPT AS SET FORTH ABOVE.

Some states do not allow limitations or implied warranties, or the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. In the event that implied warranties are nondisclaimable, those warranties are disclaimed to the extent permitted by applicable law, and all remaining implied obligations and warranties, are limited in duration to a period of one (1) year or such shorter period as permitted by applicable law.

DEFINITIONS OF BOAT MEASUREMENTS

Length Overall (LOA) - Distance along the centerline from the tip of the bow to the aft-most part of the hull.

Maximum Beam - Maximum width of the boat.

Transom Width - Maximum width of the boat at transom.

Depth - Vertical distance from lowest point of the keel to the highest point of the boat, excluding windshields, lights and other removable components.

Transom - Vertical distance at boat's centerline from the keel/transom intersection to the transom top.

Maximum Depth - Vertical distance from lowest point of the keel to the highest point of boat, including windshields.

Cockpit Depth - Vertical distance from boat floor to top of gunwale as measured at the driver seat.

Length Overall on Trailer - Distance measured along the boat centerline, from forward-most point of trailer to aft-most point of motor/outdrive.

Boat Height on Trailer - Vertical distance from ground to highest point of boat, including windshield.

Draft (Drive unit up) - Total number of inches of boat and/or motor and drive unit below the waterline. Measured unloaded, with the motor/drive unit in the full up position.

Draft (Drive unit down) - Total number of inches of boat and/or motor and drive unit below the waterline. Measured unloaded, with the motor/drive unit in the full down position.

1993 GLASTRON MODEL LINE-UP

SPECIAL EDITION SERIES

SSV 175 SE
SSV 177 SE
SSV 195 SE
SSV 197 SE
SSV 215 SE

OUTBOARD SERIES

SSV 170
SSV 190

ELITE SERIES

SSV 175 ELITE
SSV 177 ELITE
SSV 195 ELITE
SSV 197 ELITE
SSV 215 ELITE

CUDDY CABIN SERIES

SSV 199
SSV 209

SKI & FISH SERIES

SSV 170 SKI & FISH
SSV 175 SKI & FISH
SSV 190 SKI & FISH
SSV 195 SKI & FISH

DELUXE SERIES

SSV 205
SSV 225
SSV 239

MODEL DESIGNATOR CODE

0 - Outboard Model
5 - Open Bow Sterndrive Model
7 - Closed Bow Sterndrive Model
9 - Cuddy Cabin Sterndrive Model

SSV 175 SE

SPECIFICATIONS

LOA 17' 1" (5.21m.)	Transom Deadrise 21°
Beam 88" (2.24 m.)	LOA on Trailer 21' 6" (6.55 m.)
Depth 43" (1.09 m.)	Fuel Capacity 20 gal. (75.7 l.)
Maximum Depth 59" (1.5 m.)	Max. Load 1250 lbs. (567 kg.)
Cockpit Depth 28 1/2" (.72 m.)	Max. Per. 8 or 1150 lbs. (522 kg.)
Approx. Wt. w/ 230 Volvo Penta	NMMA Certified
1650 lbs. (747 kg.)	Draft: A. Drive Unit Up 16" (.41 m.)
Transom Width 73 1/4" (1.86 m.)	B. Drive Unit Dn. 31" (.79 m.)

STANDARD FEATURES

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories	6" cleats
Concealed electric horn	Walk-thru curved glass windshield
Bilge pump and blower	Wraparound bow seats
Navigation lighting	Bow storage drawers
AM/FM stereo cassette with 2 speakers	Anchor locker with mount
Glove box	Passenger grab handle
Ski locker	Adjustable fold-out sleeper seats with aft jump seats
Ski tow ring	Molded sleeper seat bases
Stainless steel bow eye and stern eyes	Custom side panels with storage
	Molded swim platform
	Stainless steel boarding ladder
	Soft top with concealed storage

OPTIONS

High altitude prop	Mooring cover
Canvas package: tonneau cover, walk-thru curtain, side curtains, stern curtain, soft top boot	Cockpit cover
	Full glass windshield

STANDARD ENGINE

230 SP Volvo Penta

STANDARD COLOR

Pacific Blue/White

SSV 175 SE

PERFORMANCE DATA

ENGINE 230 SP VOLVO PENTA - PROP 14 X 21 LH AL

RPM	MPH	GPH	RANGE*
2300	15	2.7	95
3000	25	3.6	117
3700	35	7.6	78
WOT	42-46	-	-

0 - 20 MPH Acceleration - 3.9 sec.

NOTE: Performance results will vary depending on load, altitude, and other conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

NOTES

SSV 177 SE

SPECIFICATIONS

LOA 17' 1" (5.21 m.)
Beam 88" (2.24 m.)
Depth 43" (1.09 m.)
Maximum Depth 59" (1.5 m.)
Cockpit Depth 28 1/2" (.72 m.)
Approx. Wt. w/ 230 SP Volvo Penta 1650 lbs. (747 kg.)
Transom Width 73 1/4" (1.86 m.)

Transom Deadrise 21°
LOA on Trailer 21' 6" (6.55 m.)
Fuel Capacity 20 gal. (75.7 l.)
Max. Load 1250 lbs. (567 kg.)
Max. Per. 8 or 1150 lbs. (522 kg.)
NMMA Certified
Draft: A. Drive Unit Up 16" (.41 m.)
B. Drive Unit Dn. 31" (.79 m.)

STANDARD FEATURES

Instrument panel includes:
speedometer, tachometer, trim,
fuel, oil pressure, voltmeter and
engine temperature gauges; plus
switches for bilge pump, blower,
horn, lights, and accessories

Concealed electric horn
Bilge pump and blower
Navigation lighting
AM/FM stereo cassette
with 2 speakers
Glove box
Ski locker
Ski tow ring

Stainless steel bow eye
and stern eyes
6" cleats
Walk-thru curved glass windshield
Bow access step
Stainless steel bow rails
Anchor locker with mount
Passenger grab handle
Adjustable bucket/bench seating
Custom side panels with storage
Molded swim platform
Stainless steel boarding ladder
Soft top with concealed storage

OPTIONS

High altitude prop
Mooring cover
Cockpit cover
Canvas package: side curtains,
stern curtain, soft top boot

Full glass windshield
Stainless steel rail package
Bow pad

STANDARD ENGINE

230 SP Volvo Penta

STANDARD COLOR

Pacific Blue/White

SSV 177 SE

PERFORMANCE DATA

ENGINE 230 SP VOLVO PENTA - PROP 14 X 21 LH AL

RPM	MPH	GPH	RANGE*
2300	15	2.7	95
3000	25	3.6	117
3700	35	7.6	78
WOT	42-46	-	-

0 - 20 MPH Acceleration - 3.9 sec.

NOTE: Performance results will vary depending on load, altitude, and other conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____
Motor _____ H.P. _____
Trailer _____
Accessories _____
T, T & L _____

TOTAL PRICE \$ _____

NOTES

SSV 195 SE

SPECIFICATIONS

LOA 18' 7" (5.66 m.)	Transom Deadrise 21°
Beam 90 ³ / ₄ " (2.31 m.)	LOA on Trailer 22' (6.71 m.)
Depth 47" (1.19 m.)	Fuel Capacity 35 gal. (132.5 l.)
Maximum Depth 63" (1.6 m.)	Max. Load 1500 lbs. (681 kg.)
Cockpit Depth 28 ³ / ₄ " (.73 m.)	Max. Per. 8 or 1150 lbs. (522 kg.)
Approx. Wt. w/ 430 SP	NMMA Certified
Volvo Penta 1990 lbs. (903 kg.)	Draft: A. Drive Unit Up 16 ¹ / ₂ " (.42 m.)
Transom Width 75" (1.9 m.)	B. Drive Unit Dn. 31 ¹ / ₂ " (.8 m.)

STANDARD FEATURES

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories	6" cleats Walk-thru curved glass windshield Wraparound bow seats Bow storage drawers Anchor locker with mount Passenger grab handle Adjustable fold-out sleeper seats with aft jump seats Molded sleeper seat bases Custom side panels with storage Molded swim platform Stainless steel boarding ladder Soft top with concealed storage
Concealed electric horn Bilge pump and blower Navigation lighting AM/FM stereo cassette with 2 speakers Glove box Ski locker Ski tow ring Stainless steel bow eye and stern eyes	

OPTIONS

High altitude prop	Mooring cover
Canvas package: tonneau cover, walk-thru curtain, side curtains, stern curtain, soft top boot	Cockpit cover Full glass windshield

STANDARD ENGINE

430 SP Volvo Penta

STANDARD COLOR

Pacific Blue/White

SSV 195 SE

PERFORMANCE DATA

ENGINE 430 SP VOLVO PENTA - PROP 14 X 19 LH

RPM	MPH	GPH	RANGE*
2400	15	2.9	166
3000	25	3.9	205
3900	35	7.9	141
WOT	47-49	-	-

0 - 20 MPH Acceleration - 3.2 sec.

NOTE: Performance results will vary depending on load, altitude, and other conditions.

***RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.**

SALE PRICE

Boat	\$ _____
Motor _____ H.P.	_____
Trailer	_____
Accessories	_____
T, T & L	_____
TOTAL PRICE \$	_____

NOTES

SSV 197 SE

SPECIFICATIONS

LOA 18' 7" (5.66 m.)
 Beam 90³/₄" (2.31 m.)
 Depth 47" (1.19 m.)
 Maximum Depth 63" (1.6 m.)
 Cockpit Depth 28³/₄" (.73 m.)
 Approx. Wt. w/ 430 SP Volvo
 Penta 1990 lbs. (903 kg.)
 Transom Width 75" (1.9 m.)

Transom Deadrise 21°
 LOA on Trailer 22' (6.71 m.)
 Fuel Capacity 35 gal. (132.5 l.)
 Max. Load 1500 lbs. (681 kg.)
 Max. Per. 8 or 1150 lbs. (522 kg.)
 NMMA Certified
 Draft: A. Drive Unit Up 16¹/₂" (.42 m.)
 B. Drive Unit Dn. 31¹/₂" (.8 m.)

STANDARD FEATURES

Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter and
 engine temperature gauges;
 plus switches for bilge pump,
 blower, horn, lights, and
 accessories
 Concealed electric horn
 Bilge pump and blower
 Navigation lighting
 AM/FM stereo cassette
 with 2 speakers
 Glove box
 Ski locker

Ski tow ring
 Stainless steel bow eye and
 stern eyes
 6" cleats
 Walk-thru curved glass windshield
 Bow access step
 Stainless steel bow rails
 Anchor locker with mount
 Passenger grab handle
 Adjustable bench/bucket seating
 Custom side panels with storage
 Molded swim platform
 Stainless steel boarding ladder
 Soft top with concealed storage

OPTIONS

High altitude prop
 Canvas package: side curtains,
 stern curtain, soft top boot
 Mooring cover

Cockpit cover
 Full glass windshield
 Stainless steel rail package
 Bow pad

STANDARD ENGINE

430 SP Volvo Penta

STANDARD COLOR

Pacific Blue/White

SSV 197 SE

PERFORMANCE DATA

ENGINE 430 SP VOLVO PENTA - PROP 14 X 19 LH

RPM	MPH	GPH	RANGE*
2400	15	2.9	166
3000	25	3.9	205
3900	35	7.9	141
WOT	47-49	-	-

0 - 20 MPH Acceleration - 3.2 sec.

NOTE: Performance results will vary depending on load, altitude, and other conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____
 Motor _____ H.P. _____
 Trailer _____
 Accessories _____
 T,T & L _____
TOTAL PRICE \$ _____

NOTES

SSV 215 SE

SPECIFICATIONS

LOA 21' 3" (6.47 m.)
 Beam 96" (2.43 m.)
 Depth 51" (1.29 m.)
 Maximum Depth 61" (1.54 m.)
 Cockpit Depth 31" (.77 m.)
 Approx. Wt. w/ 431 DP
 2935 lbs. (1332 kg.)
 Transom Width 92" (2.34 m.)

Transom Deadrise 19°
 LOA on Trailer 24' 8" (7.51 m.)
 Fuel Capacity 50 gal. (189 l.)
 Max. Load 1600 lbs. (726 kg.)
 Max. Per. 9 or 1300 lbs. (590 kg.)
 NMMA Certified
 Draft: A. Drive Unit Up 17 1/2" (.44 m.)
 B. Drive Unit Dn. 32" (.81 m.)

STANDARD FEATURES

Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter and
 engine temperature gauges; plus
 switches for bilge pump, blower,
 navigation/anchor lights, panel
 lights, interior lights, and horn
 Tilt steering
 Concealed electric horn
 Bilge pump and blower
 Navigation lighting
 AM/FM stereo cassette
 with 4 speakers
 Lockable glove box
 Built-in ice chest
 Ski locker
 Stainless steel ski tow ring

Stainless steel bow eye
 and stern eyes
 6" cleats
 Stainless steel bow rails, stern
 rail and cockpit rails
 Walk-thru curved glass windshield
 Wraparound bow seats
 Anchor locker with mount
 Passenger grab handle
 Adjustable fold-out sleeper seats
 with aft jump seats
 Molded sleeper seat bases
 Custom side panels with storage
 Molded swim platform
 Stainless steel boarding ladder
 Soft top with concealed storage

OPTIONS

High altitude prop
 Mooring cover
 Cockpit cover

Canvas package: tonneau cover,
 walk-thru curtain, side and
 stern curtains

STANDARD ENGINE

431 DP Volvo Penta

STANDARD COLOR

Pacific Blue/White

SSV 215 SE

PERFORMANCE DATA

ENGINE 431 DP VOLVO PENTA - PROP B6

RPM	MPH	GPH	RANGE*
2200	15	2.7	179
3000	25	3.7	218
3900	35	7.7	144
WOT	45-48	-	-

0 - 20 MPH Acceleration - 3.5 sec.

NOTE: Performance results will vary depending on load, altitude, and other conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____
 Motor _____ H.P. _____
 Trailer _____
 Accessories _____
 T,T & L _____
TOTAL PRICE \$ _____

NOTES

SSV 170

SPECIFICATIONS

LOA 17' 1" (5.21 m.)
 Beam 88" (2.24 m.)
 Depth 43" (1.09 m.)
 Maximum Depth 59" (1.5 m.)
 Cockpit Depth 28 1/2" (.72 m.)
 Approx. Wt. 1125 lbs. (511 kg.)
 Transom Width 73 1/4" (1.86 m.)
 Transom Deadrise 21°

LOA on Trailer 21' 6" (6.55 m.)
 Fuel Capacity 20 gal. (75.7 l.)
 Max. Load 1800 lbs. (817 kg.)
 Max. Per. 8 or 1150 lbs. (522 kg.)
 Max. Horsepower 140
 NMMA Certified
 Draft: A. Drive Unit Up 15 1/2" (.39 m.)
 B. Drive Unit Dn. 28 1/2" (.72 m.)

STANDARD FEATURES

Instrument panel includes:
 speedometer, tachometer and
 fuel gauges; plus switches for
 bilge pump, navigation/anchor
 lights, panel lights, horn,
 and accessories
 Concealed electric horn
 Bilge pump
 Navigation lighting
 AM/FM stereo cassette
 with 2 speakers
 Glove box
 Ski locker

Stainless steel bow eye
 and stern eyes
 6" cleats
 Walk-thru curved glass windshield
 Wraparound bow seats
 Bow storage drawers
 Anchor locker with mount
 Passenger grab handle
 Adjustable bucket/bench seating
 Custom side panels with storage
 Molded swim platform
 Stainless steel boarding ladder
 Soft top with concealed storage

OPTIONS

OMC Pre-Rig includes: ignition
 switch with ignition interrupt
 switch, speedometer, tach-
 ometer, trim gauge, fuel
 gauge, voltmeter, water
 pressure gauge, oil reservoir
 gauge, oil reservoir kit,
 manufacturer controls

Mooring cover
 Cockpit cover
 Canvas package: tonneau cover,
 walk-thru curtain, side curtains,
 stern curtain, soft top boot
 Full glass windshield

COLOR OPTIONS

Bay Blue/White
 Spectra Red/White

Laurel/White

SSV 170

PERFORMANCE DATA

ENGINE 90 EVINRUDE - PROP 13 1/4 X 17

RPM	MPH	GPH	RANGE*
2500	15	2.9	88
3400	25	4.2	102
4600	35	6.3	95
WOT	42-44	-	-

0 - 20 MPH Acceleration - 2.9 sec.

ENGINE 115 EVINRUDE - PROP 12 3/4 X 21

RPM	MPH	GPH	RANGE*
2500	15	3.6	71
3300	25	4.6	92
4700	35	7.2	83
WOT	45-48	-	-

0 - 20 MPH Acceleration - 2.7 sec.

ENGINE 135 MERCURY (V6) - PROP 13 7/8 X 21 S/S LASER

RPM	MPH	GPH	RANGE*
2400	15	4.2	71
3000	25	5.1	87
4000	35	7.1	87
WOT	47-50	-	-

0 - 20 MPH Acceleration - 2.7 sec.

ENGINE 140 JOHNSON - PROP 14 1/4 X 21

RPM	MPH	GPH	RANGE*
2100	15	3.5	73
3300	25	4.4	97
4000	35	6.9	87
WOT	47-50	-	-

0 - 20 MPH Acceleration - 2.7 sec.

NOTE: Performance results will vary depending on load, altitude, and other conditions.

***RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.**

SALE PRICE

Boat \$ _____
 Motor _____ H.P. _____
 Trailer _____
 Accessories _____
 T,T & L _____
TOTAL PRICE \$ _____

SSV 190

SPECIFICATIONS

LOA 18' 7" (5.66 m.)
 Beam 90³/₄" (2.31 m.)
 Depth 47" (1.19 m.)
 Maximum Depth 63" (1.6 m.)
 Cockpit Depth 28³/₄" (.73 m.)
 Approx. Wt. 1200 lbs. (545 kg.)
 Transom Width 75" (1.9 m.)
 Transom Deadrise 21°

LOA on Trailer 22' (6.71 m.)
 Fuel Capacity 35 gal. (132.5 l.)
 Max. Load 1900 lbs. (863 kg.)
 Max. Per. 8 or 1150 lbs. (522 kg.)
 Max. Horsepower 175
 NMMA Certified
 Draft: A. Drive Unit Up 16" (.41 m.)
 B. Drive Unit Dn. 29" (.74 m.)

STANDARD FEATURES

Instrument panel includes:
 speedometer, tachometer and
 fuel gauges; plus switches for
 bilge pump, navigation/anchor
 lights, panel lights, horn, and
 accessories
 Concealed electric horn
 Bilge pump
 Navigation lighting
 AM/FM stereo cassette
 with 2 speakers
 Glove box
 Ski locker

Stainless steel bow eye
 and stern eyes
 6" cleats
 Walk-thru curved glass windshield
 Wraparound bow seats
 Bow storage drawers
 Anchor locker with mount
 Passenger grab handle
 Adjustable bucket/bench seating
 Custom side panels with storage
 Molded swim platform
 Stainless steel boarding ladder
 Soft top with concealed storage

OPTIONS

OMC Pre-Rig includes: ignition
 switch with ignition interrupt
 switch, speedometer, tach-
 ometer, trim gauge, fuel gauge,
 voltmeter, water pressure
 gauge, oil reservoir gauge, oil
 reservoir kit, manufacturer
 controls

Mooring cover
 Cockpit cover
 Canvas package: tonneau
 cover, walk-thru curtain,
 side curtains, stern curtain,
 soft top boot
 Full glass windshield

COLOR OPTIONS

Bay Blue/White
 Spectra Red/White

Laurel/White

SSV 190

PERFORMANCE DATA

ENGINE 90 EVINRUDE - PROP 13¹/₄ X 17

RPM	MPH	GPH	RANGE*
2700	15	3.0	160
3500	25	4.4	182
4800	35	6.5	173
WOT	41-43	-	-

0 - 20 MPH Acceleration - 2.9 sec.

ENGINE 115 EVINRUDE - PROP 12³/₄ X 21

RPM	MPH	GPH	RANGE*
2600	15	3.7	131
3400	25	4.8	166
4700	35	7.2	157
WOT	44-47	-	-

0 - 20 MPH Acceleration - 2.8 sec.

ENGINE 135 MERCURY (V6) - PROP 13⁷/₈ X 21 S/S LASER

RPM	MPH	GPH	RANGE*
2500	15	4.4	109
3100	25	5.3	150
4200	35	7.5	147
WOT	46-49	-	-

0 - 20 MPH Acceleration - 2.7 sec.

ENGINE 150 JOHNSON - PROP 14¹/₄ X 21

RPM	MPH	GPH	RANGE*
2400	15	4.5	106
3000	25	5.5	144
3900	35	7.8	141
WOT	46-49	-	-

0 - 20 MPH Acceleration - 2.7 sec.

NOTE: Performance results will vary depending on load, altitude, and other conditions.

***RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.**

SALE PRICE

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

SSV 175 ELITE

SPECIFICATIONS

LOA 17' 1" (5.21 m.)
 Beam 88" (2.24 m.)
 Depth 43" (1.09 m.)
 Maximum Depth 59" (1.5 m.)
 Cockpit Depth 28 1/2" (.72 m.)
 Approx. Wt. w/ 3.0 MerC
 1750 lbs. (794 kg.)
 Transom Width 73 1/4" (1.86 m.)

Transom Deadrise 21°
 LOA on Trailer 21' 6" (6.55 m.)
 Fuel Capacity 20 gal. (75.7 l.)
 Max. Load 1250 lbs. (567 kg.)
 Max. Per. 8 or 1150 lbs. (522 kg.)
 NMMA Certified
 Draft: A. Drive Unit Up 16" (.41 m.)
 B. Drive Unit Dn. 31" (.79 m.)

STANDARD FEATURES

Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter and
 engine temperature gauges; plus
 switches for bilge pump, blower,
 horn, lights, and accessories
 Concealed electric horn
 Bilge pump and blower
 Navigation lighting
 AM/FM stereo cassette
 with 2 speakers
 Glove box
 Ski locker
 Ski tow ring
 Stainless steel bow eye
 and stern eyes
 6" cleats

Walk-thru curved full glass
 windshield
 Wraparound bow seats
 Bow storage drawers
 Anchor locker with mount
 Passenger grab handles
 Adjustable fold-out sleeper seats
 with aft jump seats
 Molded sleeper seat bases
 Custom side panels with storage
 Molded swim platform
 Stainless steel boarding ladder
 Non-skid swim platform pads
 Soft top with concealed storage
 MerC/Volvo controls
 Depthsounder
 Compass
 Hour meter

OPTIONS

High altitude prop
 Canvas package: tonneau cover,
 walk-thru curtain, side curtains,
 stern curtain, soft top boot
 Mooring cover

Cockpit cover
 Stainless steel prop (MerC only)
 Adjustable bucket/bench seating
 Adjustable bucket/sleeper seating

ENGINE OPTIONS

3.0 MerCruiser
 3.0LX MerCruiser
 4.3 MerCruiser
 230 SP Volvo Penta

250 SP Volvo Penta
 430 SP Volvo Penta
 430 DP Volvo Penta

COLOR OPTIONS

Bay Blue/White
 Spectra Red/White

Laurel/White

SSV 175 ELITE

PERFORMANCE DATA

ENGINE 3.0 MERCUISER - PROP 13 3/4 X 21 AL

RPM	MPH	GPH	RANGE*
2300	15	2.7	95
3000	25	3.6	117
3700	35	7.6	78
WOT	42-46	-	-

0 - 20 MPH Acceleration - 3.9 sec.

ENGINE 3.0LX MERCUISER - PROP 13 3/4 X 21 AL

RPM	MPH	GPH	RANGE*
2100	15	2.5	102
2900	25	3.5	121
3500	35	7.4	80
WOT	46-49	-	-

0 - 20 MPH Acceleration - 3.4 sec.

ENGINE 4.3 MERCUISER - PROP 13 3/4 X 21 AL

RPM	MPH	GPH	RANGE*
2200	15	2.6	99
2900	25	3.8	112
3400	35	7.4	80
WOT	48-51	-	-

0 - 20 MPH Acceleration - 3.3 sec.

ENGINE 230 SP VOLVO PENTA - PROP 14 X 21 LH AL

RPM	MPH	GPH	RANGE*
2300	15	2.7	95
3000	25	3.6	117
3700	35	7.6	78
WOT	42-46	-	-

0 - 20 MPH Acceleration - 3.9 sec.

NOTE: Performance results will vary depending on load, altitude, and other conditions.
 *RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

SSV 177 ELITE

PERFORMANCE DATA

ENGINE 3.0 MERCURISER - PROP 13³/₄ X 21 AL

RPM	MPH	GPH	RANGE*
2300	15	2.7	95
3000	25	3.6	117
3700	35	7.6	78
WOT	42-46	-	-

0 - 20 MPH Acceleration - 3.9 sec.

ENGINE 3.0LX MERCURISER - PROP 13³/₄ X 21 AL

RPM	MPH	GPH	RANGE*
2100	15	2.5	102
2900	25	3.5	121
3500	35	7.4	80
WOT	46-49	-	-

0 - 20 MPH Acceleration - 3.4 sec.

ENGINE 4.3 MERCURISER - PROP 13³/₄ X 21 AL

RPM	MPH	GPH	RANGE*
2200	15	2.6	99
2900	25	3.8	112
3400	35	7.4	80
WOT	48-51	-	-

0 - 20 MPH Acceleration - 3.3 sec.

ENGINE 230 SP VOLVO PENTA - PROP 14 X 21 LH AL

RPM	MPH	GPH	RANGE*
2300	15	2.7	95
3000	25	3.6	117
3700	35	7.6	78
WOT	42-46	-	-

0 - 20 MPH Acceleration - 3.9 sec.

NOTE: Performance results will vary depending on load, altitude, and other conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T,T & L _____

TOTAL PRICE \$ _____

SPECIFICATIONS

Maximum Propulsion 21°
 Fuel Capacity 6 gal. (6.55 m.)
 Fuel Consumption 30 lbs. (75.7 l.)
 Fuel Efficiency 150 lbs. (567 kg.)
 Fuel Tank Capacity 150 lbs. (522 kg.)
 Fuel Tank Unit Up 16" (.41 m.)
 Fuel Tank Unit Dn. 31" (.79 m.)

STANDARD FEATURES

Curved full glass windshield
 Aluminum step with mount
 Grab handle
 Fold-out sleeper seats
 Told-in seats
 Jump seat bases
 Storage panels with storage
 Platform
 Boarding ladder
 Swim platform pads
 Concealed storage
 Volvo controls
 Under

OPTIONS

Steel prop (MerC only)
 Bucket/bench seating
 Adjustable bucket/sleeper seating
 Bow pad

ENGINE OPTIONS

250 SP Volvo Penta
 150 SP Volvo Penta
 130 DP Volvo Penta

COLOR OPTIONS

Laurel/White

SSV 195 ELITE

SPECIFICATIONS

LOA 18' 7" (5.66 m.)
 Beam 90³/₄" (2.31 m.)
 Depth 47" (1.19 m.)
 Maximum Depth 63" (1.6 m.)
 Cockpit Depth 28³/₄" (.73 m.)
 Approx. Wt. w/ 3.0 MerC
 1825 lbs. (829 kg.)
 Transom Width 75" (1.9 m.)

Transom Deadrise 21°
 LOA on Trailer 22' (6.71 m.)
 Fuel Capacity 35 gal. (132.5 l.)
 Max. Load 1500 lbs. (681 kg.)
 Max. Per. 8 or 1150 lbs. (522 kg.)
 NMMA Certified
 Draft: A. Drive Unit Up 16¹/₂" (.42 m.)
 B. Drive Unit Dn. 31¹/₂" (.8 m.)

STANDARD FEATURES

Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter and
 engine temperature gauges; plus
 switches for bilge pump, blower,
 horn, lights, and accessories
 Concealed electric horn
 Bilge pump and blower
 Navigation lighting
 AM/FM stereo cassette
 with 2 speakers
 Glove box
 Ski locker
 Ski tow ring
 Stainless steel bow eye
 and stern eyes
 6" cleats

Walk-thru curved full glass
 windshield
 Wraparound bow seats
 Bow storage drawers
 Anchor locker with mount
 Passenger grab handle
 Adjustable fold-out sleeper seats
 with aft jump seats
 Molded sleeper seat bases
 Custom side panels with storage
 Molded swim platform
 Stainless steel boarding ladder
 Non-skid swim platform pads
 Soft top with concealed storage
 MerC/Volvo controls
 Depthsounder
 Compass
 Hour meter

OPTIONS

High altitude prop
 Canvas package: tonneau cover,
 walk-thru curtain, side curtains,
 stern curtain, soft top boot
 Mooring cover

Cockpit cover
 Stainless steel prop (MerC only)
 Adjustable bucket/bench seating
 Adjustable bucket/sleeper seating

ENGINE OPTIONS

3.0 MerCruiser
 3.0LX MerCruiser
 4.3 MerCruiser
 4.3LX MerCruiser
 5.0 MerCruiser
 5.0LX MerCruiser
 5.7 MerCruiser

230 SP Volvo Penta
 250 SP Volvo Penta
 430 SP Volvo Penta
 430 DP Volvo Penta
 431 DP Volvo Penta
 500 DP Volvo Penta
 572 DP Volvo Penta

COLOR OPTIONS

Bay Blue/White
 Spectra Red/White

Laurel/White

SSV 195 ELITE

PERFORMANCE DATA

ENGINE 3.0 MERCURISER - PROP 13 ³ / ₄ X 21 AL			
RPM	MPH	GPH	RANGE*
2300	15	2.8	179
3000	25	3.8	211
3800	35	7.8	144
WOT	41-44	-	-

0 - 20 MPH Acceleration - 4.0 sec.

ENGINE 4.3LX MERCURISER - PROP 13 ³ / ₄ X 21 AL			
RPM	MPH	GPH	RANGE*
2400	15	3.0	160
3200	25	4.0	202
3700	35	7.9	141
WOT	47-49	-	-

0 - 20 MPH Acceleration - 3.3 sec.

ENGINE 5.0LX MERCURISER - PROP 13 ³ / ₄ X 21 AL			
RPM	MPH	GPH	RANGE*
2200	15	3.3	144
2800	25	4.3	186
3500	35	8.0	141
WOT	53-57	-	-

0 - 20 MPH Acceleration - 3.1 sec.

ENGINE 430 DP VOLVO PENTA - PROP B6			
RPM	MPH	GPH	RANGE*
3000	27	4.9	179
3500	34	7.4	144
4000	38	7.9	157
WOT	47-49	-	-

0 - 20 MPH Acceleration - 3.2 sec.

NOTE: Performance results will vary depending on load, altitude, and other conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____
 Motor _____ H.P. _____
 Trailer _____
 Accessories _____
 T,T & L _____

TOTAL PRICE \$ _____

SSV 197 ELITE

SPECIFICATIONS

LOA 18' 7" (5.66 m.)	Transom Deadrise 21°
Beam 90 ³ / ₄ " (2.31 m.)	LOA on Trailer 22' (6.71 m.)
Depth 47" (1.19 m.)	Fuel Capacity 35 gal. (132.5 l.)
Maximum Depth 63" (1.6 m.)	Max. Load 1500 lbs. (681 kg.)
Cockpit Depth 28 ³ / ₄ " (.73 m.)	Max. Per. 8 or 1150 lbs. (522 kg.)
Approx. Wt. w/ 3.0 MerC 1825 lbs. (829 kg.)	NMMA Certified
Transom Width 75" (1.9 m.)	Draft: A. Drive Unit Up 16 ¹ / ₂ " (.42 m.) B. Drive Unit Dn. 31 ¹ / ₂ " (.8 m.)

STANDARD FEATURES

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories	Walk-thru curved full glass windshield
Concealed electric horn	Bow access step
Bilge pump and blower	Anchor locker with mount
Navigation lighting	Passenger grab handle
AM/FM stereo cassette with 2 speakers	Adjustable fold-out sleeper seats with aft jump seats
Glove box	Molded sleeper seat bases
Ski locker	Custom side panels with storage
Ski tow ring	Molded swim platform
Stainless steel bow eye and stern eyes	Stainless steel boarding ladder
6" cleats	Non-skid swim platform pads
	Soft top with concealed storage
	MerC/Volvo controls
	Depthsounder
	Compass
	Hour meter

OPTIONS

High altitude prop	Stainless steel prop (MerC only)
Canvas package: side curtains, stern curtain, soft top boot	Adjustable bucket/bench seating
Mooring cover	Adjustable bucket/sleeper seating
Cockpit cover	Bow pad

ENGINE OPTIONS

3.0 MerCruiser	230 SP Volvo Penta
3.0LX MerCruiser	250 SP Volvo Penta
4.3 MerCruiser	430 SP Volvo Penta
4.3LX MerCruiser	430 DP Volvo Penta
5.0 MerCruiser	431 DP Volvo Penta
5.0LX MerCruiser	500 DP Volvo Penta
5.7 MerCruiser	572 DP Volvo Penta

COLOR OPTIONS

Bay Blue/White	Laurel/White
Spectra Red/White	

SSV 197 ELITE

PERFORMANCE DATA

ENGINE 3.0 MERCURISER - PROP 13³/₄ X 21 AL

RPM	MPH	GPH	RANGE*
2300	15	2.8	179
3000	25	3.8	211
3800	35	7.8	144
WOT	41-44	-	-

0 - 20 MPH Acceleration - 4.0 sec.

ENGINE 4.3LX MERCURISER - PROP 13³/₄ X 21 AL

RPM	MPH	GPH	RANGE*
2400	15	3.0	160
3200	25	4.0	202
3700	35	7.9	141
WOT	47-49	-	-

0 - 20 MPH Acceleration - 3.3 sec.

ENGINE 5.0LX MERCURISER - PROP 13³/₄ X 21 AL

RPM	MPH	GPH	RANGE*
2200	15	3.3	144
2800	25	4.3	186
3500	35	8.0	141
WOT	53-57	-	-

0 - 20 MPH Acceleration - 3.1 sec.

ENGINE 430 DP VOLVO PENTA - PROP B6

RPM	MPH	GPH	RANGE*
3000	27	4.9	179
3500	34	7.4	144
4000	38	7.9	157
WOT	47-49	-	-

0 - 20 MPH Acceleration - 3.2 sec.

NOTE: Performance results will vary depending on load, altitude, and other conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat	\$ _____
Motor _____ H.P.	_____
Trailer	_____
Accessories	_____
T, T & L	_____
TOTAL PRICE \$	_____

SSV 215 ELITE

SPECIFICATIONS

LOA 21' 3" (6.47 m.)	Transom Deadrise 19°
Beam 96" (2.43 m.)	LOA on Trailer 24' 8" (7.51 m.)
Depth 51" (1.29 m.)	Fuel Capacity 50 gal. (189 l.)
Maximum Depth 61" (1.54 m.)	Max. Load 1600 lbs. (726 kg.)
Cockpit Depth 31" (.77 M.)	Max. Per. 9 or 1300 lbs. (590 kg.)
Approx. Wt. w/ 5.7 MerC	NMMA Certified
3050 lbs. (1384 kg.)	Draft: A. Drive Unit Up 17 1/2" (.44 m.)
Transom Width 92" (2.34 m.)	B. Drive Unit Dn. 32" (.81 m.)

STANDARD FEATURES

Deluxe instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, navigation/anchor lights, panel lights, interior lights, and horn	6" cleats
Tilt steering	Stainless steel bow rails, stern rail and cockpit rails
Concealed electric horn	Walk-thru curved glass windshield
Bilge pump and blower	Wraparound bow seats
Navigation lighting	Anchor locker with mount
AM/FM stereo cassette with 4 speakers	Passenger grab handle
Lockable glove box	Adjustable fold-out sleeper seats with aft jump seats
Built-in ice chest	Molded sleeper seat bases
Ski locker	Molded swim platform
Stainless steel ski tow ring	Stainless steel boarding ladder
Stainless steel bow eye and stern eyes	Non-skid swim platform pads
	Soft top with concealed storage
	Engine compartment light
	Merc/Volvo controls
	Depthsounder
	Compass
	Hourmeter

OPTIONS

VHF radio	Mooring cover
High altitude prop	Cockpit cover
Windshield wiper	Stainless steel prop (MerC only)
Halon system	Canvas package: tonneau cover, walk-thru curtain, side and stern curtains
Adjustable bucket/bench seating	
Adjustable bucket/sleeper seating	

ENGINE OPTIONS

4.3 MerCruiser	430 SP Volvo Penta
4.3LX MerCruiser	430 DP Volvo Penta
5.0 MerCruiser	431 DP Volvo Penta
5.0LX MerCruiser	500 DP Volvo Penta
5.7 MerCruiser	572 DP Volvo Penta
350 MerC Magnum	570 DP Volvo Penta
7.4 MerCruiser (SL seating only)	740 DP Volvo Penta (SL seating only)
454 MerC Magnum (SL seating only)	

COLOR OPTIONS

Bay Blue/White	Laurel/White
Spectra Red/White	

SSV 215 ELITE

PERFORMANCE DATA

ENGINE 5.7 MERCURISER - PROP 14 X 19 AL

RPM	MPH	GPH	RANGE*
3000	28	8.9	182
3500	36	13.4	165
4000	47	17.4	148
WOT	50-54	-	-

0 - 20 MPH Acceleration - 3.7 sec.

ENGINE 350 MAG MERCURISER - PROP 19 OSS

RPM	MPH	GPH	RANGE*
3000	29	8.9	182
3500	37	13.5	154
4000	47	17.6	154
WOT	51-55	-	-

0 - 20 MPH Acceleration - 3.6 sec.

ENGINE 7.4 MERCURISER - PROP 23 MIRAGE

RPM	MPH	GPH	RANGE*
3000	32	10.5	171
3500	38	14.2	154
4000	44	20.5	120
WOT	57-61	-	-

0 - 20 MPH Acceleration - 3.3 sec.

ENGINE 570 DP VOLVO PENTA - PROP B5

RPM	MPH	GPH	RANGE*
3000	32	9.0	205
3500	38	13.2	165
4000	43	17.4	143
WOT	51-55	-	-

0 - 20 MPH Acceleration - 3.6 sec.

NOTE: Performance results will vary depending on load, altitude, and other conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat	\$ _____
Motor _____ H.P.	_____
Trailer	_____
Accessories	_____
T, T & L	_____
TOTAL PRICE	\$ _____

SSV 199

SPECIFICATIONS

LOA 18' 7" (5.66 m.)
 Beam 90 3/4" (2.31 m.)
 Depth 53" (1.34 m.)
 Maximum Depth 69" (1.75 m.)
 Cockpit Depth 35" (.89 m.)
 Approx. Wt. w/ 3.0 Merc
 1825 lbs. (829 kg.)
 Transom Width 75" (1.9 m.)

Transom Deadrise 21°
 LOA on Trailer 22' (6.71 m.)
 Fuel Capacity 35 gal. (132.5 l.)
 Max. Load 1500 lbs. (681 kg.)
 Max. Per. 8 or 1150 lbs. (522 kg.)
 NMMA Certified
 Draft: A. Drive Unit Up 16 1/2" (.42 m.)
 B. Drive Unit Dn. 31 1/2" (.8 m.)

STANDARD FEATURES

Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter and
 engine temperature gauges; plus
 switches for bilge pump, blower,
 horn, lights and accessories
 Concealed electric horn
 Bilge pump and blower
 Navigation lighting
 AM/FM stereo cassette
 with 2 speakers
 Ski tow ring

Stainless steel bow eye
 and stern eyes
 6" cleats
 Walk-thru curved glass
 windshield
 Passenger grab handle
 Stbd bucket seat/port sleeper seat
 w/aft jump seats
 Custom side panels with storage
 Molded swim platform
 Stainless steel boarding ladder
 Soft top with concealed storage

OPTIONS

Convenience package: hour meter,
 depthsounder, compass
 Stainless steel prop (MerC only)
 Full glass windshield
 Adjustable bucket/bench seating

High altitude prop
 Canvas package: side curtains,
 stern curtain, soft top boot
 Mooring cover
 Cockpit cover

ENGINE OPTIONS

230 SP Volvo Penta
 250 SP Volvo Penta
 430 SP Volvo Penta
 430 DP Volvo Penta
 431 DP Volvo Penta
 500 DP Volvo Penta
 572 DP Volvo Penta

COLOR OPTIONS

Laurel/White

Bay Blue/White
 Spectra Red/White

SSV 199

PERFORMANCE DATA

ENGINE 3.0 MERCURISER - PROP 13 3/4 X 21 AL

RPM	MPH	GPH	RANGE*
2300	15	2.8	179
3000	25	3.8	211
3800	35	7.8	144
WOT	41-44	-	-

0 - 20 MPH Acceleration - 4.0 sec.

ENGINE 4.3LX MERCURISER - PROP 13 3/4 X 21 AL

RPM	MPH	GPH	RANGE*
2400	15	3.0	160
3200	25	4.0	202
3700	35	7.9	141
WOT	47-49	-	-

0 - 20 MPH Acceleration - 3.3 sec.

ENGINE 5.0LX MERCURISER - PROP 13 3/4 X 21 AL

RPM	MPH	GPH	RANGE*
2200	15	3.3	144
2800	25	4.3	186
3500	35	8.0	141
WOT	53-57	-	-

0 - 20 MPH Acceleration - 3.1 sec.

ENGINE 430 DP VOLVO PENTA - PROP B6

RPM	MPH	GPH	RANGE*
3000	27	4.9	179
3500	34	7.4	144
4000	38	7.9	157
WOT	47-49	-	-

0 - 20 MPH Acceleration - 3.2 sec.

NOTE: Performance results will vary depending on load, altitude, and other conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

SSV 209

SPECIFICATIONS

LOA 20' 1" (6.12 m.)	Transom Deadrise 19°
Beam 96" (2.44 m.)	LOA on Trailer 22' 7 ³ / ₄ " (6.9 m.)
Depth 71" (1.8 m.)	Fuel Capacity 45 gal. (170.3 l.)
Maximum Depth 87" (2.21 m.)	Max. Load 1450 lbs. (658 kg.)
Cockpit Depth 35" (.89 m.)	Max. Per. 8 or 1150 lbs. (522 kg.)
Approx. Wt. w/ 3.0 MerC	NMMA Certified
2475 lbs. (1124 kg.)	Draft: A. Drive Unit Up 18 ¹ / ₂ " (.47 m.)
Transom Width 90" (2.29 m.)	B. Drive Unit Dn. 33" (.84 m.)

STANDARD FEATURES

Deluxe instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories	Walk-around deck with hatch
Concealed electric horn	Anchor locker with mount
Automatic bilge pump and blower	Passenger grab handle
Navigation lighting	Adjustable fold-out sleeper seats with aft jump seats
AM/FM stereo cassette with 2 speakers	Molded sleeper seat bases
Stainless steel ski tow ring	Custom side panels with storage
Stainless steel bow eye and stern eyes	Lockable cabin door
6" cleats	Forward V-berth
Stainless steel bow rails	Cabin valance with storage and cabin light
Walk-thru curved glass windshield	Cockpit sink with fresh water
Bow access step	Molded swim platform
	Stainless steel boarding ladder
	Non-skid swim platform pads
	Soft top with concealed storage
	MerC/Volvo controls

OPTIONS

High altitude prop	Stainless steel prop (MerC only)
Portable head	Full glass windshield
Canvas package: soft top boot, side curtains and stern curtain	Stern rail package
Mooring cover	Bow pad
Cockpit cover	Adjustable bucket/bench seating
Convenience package: hour meter	Adjustable bucket/sleeper seating
depthsounder, compass	Camper canvas

ENGINE OPTIONS

3.0 MerCruiser	230 SP Volvo Penta
3.0LX MerCruiser	250 SP Volvo Penta
4.3 MerCruiser	430 SP Volvo Penta
4.3LX MerCruiser	430 DP Volvo Penta
5.0 MerCruiser	431 DP Volvo Penta
5.0LX MerCruiser	500 DP Volvo Penta
5.7 MerCruiser	572 DP Volvo Penta
350 MerC Magnum	570 DP Volvo Penta

COLOR OPTIONS

Bay Blue/White	Laurel/White
Spectra Red/White	

38

SSV 209

PERFORMANCE DATA

ENGINE 4.3 MERCUISER - PROP 13³/₄ X 21 AL

RPM	MPH	GPH	RANGE*
2400	15	2.9	218
3000	25	3.9	269
3900	35	7.7	189
WOT	45-48	-	-

0 - 20 MPH Acceleration - 3.7 sec.

ENGINE 5.0LX MERCUISER - PROP 13³/₄ X 21

RPM	MPH	GPH	RANGE*
2200	15	3.0	210
2600	25	4.0	265
3400	35	7.9	185
WOT	48-51	-	-

0 - 20 MPH Acceleration - 3.5 sec.

ENGINE 431 DP VOLVO PENTA - PROP B6

RPM	MPH	GPH	RANGE*
2300	15	2.7	235
3000	25	3.7	286
3800	35	7.7	189
WOT	46-49	-	-

0 - 20 MPH Acceleration - 3.6 sec.

ENGINE 572 DP VOLVO PENTA - PROP B5

RPM	MPH	GPH	RANGE*
1900	15	3.5	181
2300	25	4.1	256
3000	35	13.4	109
WOT	52-56	-	-

0 - 20 MPH Acceleration - 3.5 sec.

NOTE: Performance results will vary depending on load, altitude, and other conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

SSV 170 SKI & FISH

SPECIFICATIONS

LOA 17' 1" (5.21 m.)
 Beam 88" (2.24 m.)
 Depth 43" (1.09 m.)
 Maximum Depth 59" (1.5 m.)
 Cockpit Depth 28 1/2" (.72 m.)
 Approx. Wt. 1125 lbs. (511 kg.)
 Transom Width 73 1/4" (1.86 m.)
 Transom Deadrise 21°

LOA on Trailer 21' 6" (6.55 m.)
 Fuel Capacity 20 gal. (75.7 l.)
 Max. Load 1800 lbs. (817 kg.)
 Max. Per. 8 or 1150 lbs. (522 kg.)
 Max. Horsepower 140
 NMMA Certified
 Draft: A. Drive Unit Up 15 1/2" (.39 m.)
 .B. Drive Unit Dn. 28 1/2" (.72 m.)

STANDARD FEATURES

Instrument panel includes:
 speedometer, tachometer and
 fuel gauge; plus switches for
 bilge pump, navigation/anchor
 lights, panel lights, horn, and
 accessories
 Bow panel includes: aerator switch,
 voltmeter, tilt switch, battery
 charger switch, battery selector
 switch, trolling motor plug
 Concealed electric horn
 Bilge pump
 Navigation lighting
 AM/FM stereo cassette
 with 2 speakers
 Glove box
 Ski locker

Stainless steel bow eye
 and stern eyes
 6" cleats
 Walk-thru curved glass windshield
 Wraparound bow seats
 Bow converts to fishing deck
 4 fishing seats
 Anchor locker with mount
 Passenger grab handle
 Custom side panels with storage
 Molded swim platform
 Stainless steel boarding ladder
 Soft top with concealed storage
 Aerated livewell
 Trolling motor mount
 Trolling motor battery trays

OPTIONS

Mooring cover
 Cockpit cover
 Canvas package: tonneau cover,
 walk-thru curtain, side curtains,
 stern curtain, soft top boot
 Fishing package: trolling motor,
 fish finder, rod holders
 Full glass windshield

OMC Pre-Rig includes: ignition
 switch with ignition interrupt
 switch, speedometer, tach-
 ometer, trim gauge, fuel gauge,
 voltmeter, water pressure gauge,
 oil reservoir gauge, oil reservoir
 kit, manufacturer controls

COLOR OPTIONS

Bay Blue/White
 Spectra Red/White

Laurel/White

SSV 170 SKI & FISH

PERFORMANCE DATA

ENGINE 90 EVINRUDE - PROP 13 1/4 X 17

RPM	MPH	GPH	RANGE*
2500	15	2.9	88
3400	25	4.2	102
4600	35	6.3	95
WOT	42-44	-	-

0 - 20 MPH Acceleration - 2.9 sec.

ENGINE 115 EVINRUDE - PROP 12 3/4 X 21

RPM	MPH	GPH	RANGE*
2500	15	3.6	71
3300	25	4.6	92
4700	35	7.2	83
WOT	45-48	-	-

0 - 20 MPH Acceleration - 2.7 sec.

ENGINE 135 MERCURY (V6) - PROP 13 7/8 X 21 S/S LASER

RPM	MPH	GPH	RANGE*
2400	15	4.2	71
3000	25	5.1	87
4000	35	7.1	87
WOT	47-50	-	-

0 - 20 MPH Acceleration - 2.7 sec.

ENGINE 140 JOHNSON - PROP 14 1/4 X 21

RPM	MPH	GPH	RANGE*
2100	15	3.5	73
3300	25	4.4	97
4000	35	6.9	87
WOT	47-50	-	-

0 - 20 MPH Acceleration - 2.7 sec.

NOTE: Performance results will vary depending on load, altitude,
 and other conditions.

*RANGE: Mileage range at designated RPM and MPH as shown
 above starting with a full tank of gas.

SALE PRICE

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

SSV 175 SKI & FISH

SPECIFICATIONS

LOA 17' 1" (5.21 m.)
 Beam 88" (2.24 m.)
 Depth 43" (1.09 m.)
 Maximum Depth 59" (1.5 m.)
 Cockpit Depth 28 1/2" (.72 m.)
 Approx. Wt. w/ 3.0 Merc
 1750 lbs. (794 kg.)
 Transom Width 73 1/4" (1.86 m.)

Transom Deadrise 21°
 LOA on Trailer 21' 6" (6.55 m.)
 Fuel Capacity 20 gal. (75.7 l.)
 Max. Load 1250 lbs. (567 kg.)
 Max. Per. 8 or 1150 lbs. (522 kg.)
 NMMA Certified
 Draft: A. Drive Unit Up 16" (.41 m.)
 B. Drive Unit Dn. 31" (.79 m.)

STANDARD FEATURES

Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter and
 engine temperature gauges; plus
 switches for bilge pump, blower,
 horn, lights, and accessories
 Bow panel includes: aerator switch,
 voltmeter, tilt switch, battery
 charger switch, battery selector
 switch, trolling motor plug
 Concealed electric horn
 Bilge pump and blower
 Navigation lighting
 AM/FM stereo cassette
 with 2 speakers
 Glove box
 Ski locker
 Ski tow ring

Stainless steel bow eye
 and stern eyes
 6" cleats
 Walk-thru curved glass windshield
 Wraparound bow seats
 Bow converts to fishing deck
 2 adjustable bucket seats/
 2 removable fishing seats/
 bench seat
 Anchor locker with mount
 Passenger grab handle
 Custom side panels with storage
 Molded swim platform
 Stainless steel boarding ladder
 Soft top with concealed storage
 Aerated livewell
 Trolling motor mount
 Trolling motor battery trays

OPTIONS

High altitude prop
 Canvas package: tonneau cover,
 walk-thru curtain, side curtains,
 stern curtain, soft top boot
 Mooring cover

Cockpit cover
 Stainless steel prop (Merc only)
 Full glass windshield
 Fishing package includes: trolling
 motor, fish finder, rod holders

ENGINE OPTIONS

3.0 MerCruiser
 3.0LX MerCruiser
 4.3 MerCruiser
 230 SP Volvo Penta

250 SP Volvo Penta
 430 SP Volvo Penta
 430 DP Volvo Penta

COLOR OPTIONS

Bay Blue/White
 Spectra Red/White

Laurel/White

SSV 175 SKI & FISH

PERFORMANCE DATA

ENGINE 3.0 MERCUISER - PROP 13 3/4 X 21 AL

RPM	MPH	GPH	RANGE*
2300	15	2.7	95
3000	25	3.6	117
3700	35	7.6	78
WOT	42-46	-	-

0 - 20 MPH Acceleration - 3.9 sec.

ENGINE 3.0LX MERCUISER - PROP 13 3/4 X 21 AL

RPM	MPH	GPH	RANGE*
2100	15	2.5	102
2900	25	3.5	121
3500	35	7.4	80
WOT	46-49	-	-

0 - 20 MPH Acceleration - 3.4 sec.

ENGINE 4.3 MERCUISER - PROP 13 3/4 X 21 AL

RPM	MPH	GPH	RANGE*
2200	15	2.6	99
2900	25	3.8	112
3400	35	7.4	80
WOT	48-51	-	-

0 - 20 MPH Acceleration - 3.3 sec.

ENGINE 230 SP VOLVO PENTA - PROP 14 X 21 LH AL

RPM	MPH	GPH	RANGE*
2300	15	2.7	95
3000	25	3.6	117
3700	35	7.6	78
WOT	42-46	-	-

0 - 20 MPH Acceleration - 3.9 sec.

NOTE: Performance results will vary depending on load, altitude, and other conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

SSV 190 SKI & FISH

SPECIFICATIONS

LOA on Trailer 22' (6.71 m.)
 Fuel Capacity 35 gal. (132.5 l.)
 Max. Load 1900 lbs. (863 kg.)
 Max. Per. 8 or 1150 lbs. (522 kg.)
 Max. Horsepower 175
 NMMA Certified
 Draft: A. Drive Unit Up 16" (.41 m.)
 B. Drive Unit Dn. 29" (.74 m.)

STANDARD FEATURES

Instrument Panel includes:
 tachometer, and
 Plus switches for
 navigation/anchor
 lights, horn, and
 battery selector

Stainless steel bow eye and
 stern eyes
 6" cleats
 Walk-thru curved glass windshield
 Wraparound bow seats
 Bow converts to fishing deck
 4 fishing seats
 Anchor locker with mount
 Passenger grab handle
 Custom side panels with storage
 Molded swim platform
 Stainless steel boarding ladder
 Soft top with concealed storage
 Aerated livewell
 Trolling motor mount
 Trolling motor battery trays

OPTIONS

Canvas package: tonneau cover,
 side curtains,
 soft top boot
 Fishing package includes:
 trolling motor, fish finder, rod holders
 Full glass windshield

OMC Pre-Rig includes: ignition
 switch with ignition interrupt
 switch, speedometer, tachometer,
 trim gauge, fuel gauge, voltmeter,
 water pressure gauge, oil
 reservoir gauge, oil reservoir kit,
 manufacturer controls

COLOR OPTIONS

Laurel/White
 Navy Blue/White
 Spectra Red/White

SSV 190 SKI & FISH

PERFORMANCE DATA

ENGINE 90 EVINRUDE - PROP 13 1/4 X 17

RPM	MPH	GPH	RANGE*
2700	15	3.0	160
3500	25	4.4	182
4800	35	6.5	173
WOT	41-43	-	-

0 - 20 MPH Acceleration - 2.9 sec.

ENGINE 115 EVINRUDE - PROP 12 3/4 X 21

RPM	MPH	GPH	RANGE*
2600	15	3.7	131
3400	25	4.8	166
4700	35	7.2	157
WOT	44-47	-	-

0 - 20 MPH Acceleration - 2.8 sec.

ENGINE 135 MERCURY (V6) - PROP 13 7/8 X 21 S/S LASER

RPM	MPH	GPH	RANGE*
2500	15	4.4	109
3100	25	5.3	150
4200	35	7.5	147
WOT	46-49	-	-

0 - 20 MPH Acceleration - 2.7 sec.

ENGINE 150 JOHNSON - PROP 14 1/4 X 21

RPM	MPH	GPH	RANGE*
2400	15	4.5	106
3000	25	5.5	144
3900	35	7.8	141
WOT	46-49	-	-

0 - 20 MPH Acceleration - 2.7 sec.

NOTE: Performance results will vary depending on load, altitude, and other conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

SKI & FISH

IFICATIONS

Transom Deadrise 21°
 LOA on Trailer 22' (6.71 m.)
 Fuel Capacity 35 gal. (132.5 l.)
 Max. Load 1500 lbs. (681 kg.)
 Max. Per. 8 or 1150 lbs. (522 kg.)
 NMMA Certified
 Draft: A. Drive Unit Up 16 1/2" (42 m.)
 B. Drive Unit Dn. 31 1/2" (8 m.)

FEATURES

Stainless steel bow eye and stern eyes
 6" cleats
 Walk-thru curved glass windshield
 Wraparound bow seats
 Bow converts to fishing deck
 2 adjustable bucket seats/
 2 removable fishing seats/
 bench seat
 Anchor locker with mount
 Passenger grab handle
 Custom side panels with storage
 Molded swim platform
 Stainless steel boarding ladder
 Soft top with concealed storage
 Aerated livewell
 Trolling motor mount
 Trolling motor battery trays

OPTIONS

Cockpit cover
 Stainless steel prop (Merc only)
 Full glass windshield
 Fishing package: trolling motor, fish finder, rod holders

ENGINE OPTIONS

430 SP Volvo Penta
 430 DP Volvo Penta
 431 DP Volvo Penta
 500 DP Volvo Penta
 572 DP Volvo Penta

COLOR OPTIONS

Laurel/White

SSV 195 SKI & FISH

PERFORMANCE DATA

ENGINE 3.0 MERCURISER - PROP 13 3/4 X 21 AL

RPM	MPH	GPH	RANGE*
2300	15	2.8	179
3000	25	3.8	211
3800	35	7.8	144
WOT	41-44	-	-

0 - 20 MPH Acceleration - 4.0 sec.

ENGINE 4.3LX MERCURISER - PROP 13 3/4 X 21 AL

RPM	MPH	GPH	RANGE*
2400	15	3.0	160
3200	25	4.0	202
3700	35	7.9	141
WOT	47-49	-	-

0 - 20 MPH Acceleration - 3.3 sec.

ENGINE 5.0LX MERCURISER - PROP 13 3/4 X 21 AL

RPM	MPH	GPH	RANGE*
2200	15	3.3	144
2800	25	4.3	186
3500	35	8.0	141
WOT	53-57	-	-

0 - 20 MPH Acceleration - 3.1 sec.

ENGINE 430 DP VOLVO PENTA - PROP B6

RPM	MPH	GPH	RANGE*
3000	27	4.9	179
3500	34	7.4	144
4000	38	7.9	157
WOT	47-49	-	-

0 - 20 MPH Acceleration - 3.2 sec.

NOTE: Performance results will vary depending on load, altitude, and other conditions.

***RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.**

SALE PRICE

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

SSV 205

SPECIFICATIONS

LOA 20' 1" (6.12 m.)	Transom Deadrise 19°
Beam 96" (2.44 m.)	LOA on Trailer 22' 7 ³ / ₄ " (6.9 m.)
Depth 52 ³ / ₄ " (1.34 m.)	Fuel Capacity 35 gal. (132.5 l.)
Maximum Depth 59 ¹ / ₂ " (1.51 m.)	Max. Load 1585 lbs. (720 kg.)
Cockpit Depth 30 ³ / ₄ " (.78 m.)	Max. Per. 9 or 1300 lbs. (590 kg.)
Approx. Wt. w/ 5.0 MerC	NMMA Certified
2825 lbs. (1283 kg.)	Draft: A. Drive Unit Up 18 ¹ / ₂ " (.47 m.)
Transom Width 90" (2.29 m.)	B. Drive Unit Dn. 33" (.84 m.)

STANDARD FEATURES

Deluxe instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, navigation/anchor lights, panel lights, interior lights, and horn	Stainless steel bow eye and stern eyes
Tilt steering	8" cleats
Concealed electric horn	Stainless steel bow rails, stern rail and cockpit rails
Bilge pump and blower	Walk-thru curved glass windshield
Navigation lighting	Wraparound bow seats
Circuit breakers	Anchor locker with mount
AM/FM stereo cassette with 2 speakers	Passenger grab handle
Glove box	Adjustable fold-out sleeper seats with aft jump seats
Built-in ice chest	Molded sleeper seat bases
Ski locker	Molded swim platform
Stainless steel ski tow ring	Stainless steel boarding ladder
	Non-skid swim platform pads
	Soft top with concealed storage
	MerC/Volvo controls

OPTIONS

High altitude prop	VHF radio
Halon system	Mooring Cover
Canvas package: tonneau cover walk-thru curtain, side and stern curtains	Cockpit Cover
Convenience package: compass, depthsounder, hour meter	Stainless steel prop (MerC only)
Deluxe stereo with remote	Adjustable bucket/bench seating
	Adjustable bucket/sleeper seating
	Windshield wiper
	Stainless steel vents

ENGINE OPTIONS

4.3 MerCruiser	430 DP Volvo Penta
4.3LX MerCruiser	431 DP Volvo Penta
5.0 MerCruiser	500 DP Volvo Penta
5.0LX MerCruiser	572 DP Volvo Penta
5.7 MerCruiser	570 DP Volvo Penta
350 MerC Magnum	
430 SP Volvo Penta	

COLOR OPTIONS

Bay Blue/White	Laurel/White
Spectra Red/White	

SSV 205

PERFORMANCE DATA

ENGINE 5.0 MERCURISER - PROP 14 X 19 AL

RPM	MPH	GPH	RANGE*
3000	27	9.6	86
3500	34	12.2	90
4000	34	17.9	70
WOT	40	-	-

0 - 20 MPH Acceleration - 3.6 sec.

ENGINE 5.7 MERCURISER - PROP 13³/₄ X 21 AL

RPM	MPH	GPH	RANGE*
3000	33	9.1	115
3500	33	13.4	93
4000	39	17.4	83
WOT	45	-	-

0 - 20 MPH Acceleration - 3.5 sec.

ENGINE 350 MAG MERCURISER - PROP 21 OSS

RPM	MPH	GPH	RANGE*
3000	34	9.0	122
3500	34	13.8	93
4000	40	17.5	83
WOT	46	-	-

0 - 20 MPH Acceleration - 3.5 sec.

ENGINE 431 DP VOLVO PENTA - PROP B6

RPM	MPH	GPH	RANGE*
2300	15	2.7	179
3000	15	3.7	218
3800	25	7.7	144
WOT	35	-	-

0 - 20 MPH Acceleration - 3.6 sec.

NOTE: Performance results will vary depending on load, altitude, and other conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

SSV 225

SPECIFICATIONS

LOA 22' 5" (6.83 m.)	Transom Deadrise 19°
Beam 98" (2.49 m.)	LOA on Trailer 25' 10" (7.87 m.)
Depth 52 3/4" (1.34 m.)	Fuel Capacity 60 gal. (227.1 l.)
Maximum Depth 61" (1.55 m.)	Max. Load 1600 lbs. (726 kg.)
Cockpit Depth 32 1/4" (.82 m.)	Max. Per. 9 or 1300 lbs. (590 kg.)
Approx. Wt. w/ 5.7 MerC	NMMA Certified
3100 lbs. (1407 kg.)	Draft: A. Drive Unit Up 17 1/2" (.44 m.)
Transom Width 90" (2.29 m.)	B. Drive Unit Dn. 32" (.81 m.)

STANDARD FEATURES

Deluxe instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, navigation/anchor lights, panel lights, interior lights, and horn	Stainless steel bow eye and stern eyes 8" cleats Stainless steel bow rails, stern rail and cockpit rails Stainless steel vents Walk-thru curved glass windshield Wraparound bow seats Anchor locker with mount Passenger grab handle Adjustable fold-out sleeper seats with aft jump seats Molded sleeper seat bases Molded swim platform Stainless steel boarding ladder Non-skid swim platform pads Soft top with concealed storage Engine compartment light MerC/Volvo controls
Tilt steering Concealed electric horn Bilge pump and blower Navigation lighting Circuit breakers AM/FM stereo cassette with 4 speakers Lockable glove box Built-in ice chest Ski locker Stainless steel ski tow ring	

OPTIONS

Electric lift with remote panel Stereo with remote control VHF radio High altitude prop Windshield wiper Halon system Canvas package: tonneau cover, walk-thru curtain, side and stern curtains	Convenience package: depthsounder, compass, hour meter Mooring cover Cockpit cover Stainless steel prop (MerC only) Adjustable bucket/bench seating Adjustable bucket/sleeper seating
---	--

ENGINE OPTIONS

5.0 MerCruiser	454 MerC Magnum (SL seating only)
5.0LX MerCruiser	500 DP Volvo Penta
5.7 MerCruiser	572 DP Volvo Penta
350 MerC Magnum	570 DP Volvo Penta
7.4 MerCruiser (SL seating only)	740 DP Volvo Penta (SL seating only)

COLOR OPTIONS

Bay Blue/White	Laurel/White
Spectra Red/White	

SSV 225

PERFORMANCE DATA

ENGINE 5.7 MERCUISER - PROP 14 X 19 AL

RPM	MPH	GPH	RANGE*
3000	28	8.9	182
3500	36	13.4	165
4000	47	17.4	148
WOT	50-54	-	-

0 - 20 MPH Acceleration - 3.7 sec.

ENGINE 350 MAG MERCUISER - PROP 19 QSS

RPM	MPH	GPH	RANGE*
3000	29	8.9	182
3500	37	13.5	154
4000	47	17.6	154
WOT	51-55	-	-

0 - 20 MPH Acceleration - 3.6 sec.

ENGINE 7.4 MERCUISER - PROP 23 MIRAGE

RPM	MPH	GPH	RANGE*
3000	32	10.5	171
3500	38	14.2	154
4000	44	20.5	120
WOT	57-61	-	-

0 - 20 MPH Acceleration - 3.3 sec.

ENGINE 570 DP VOLVO PENTA - PROP B5

RPM	MPH	GPH	RANGE*
3000	32	9.0	205
3500	38	13.2	165
4000	43	17.4	143
WOT	51-55	-	-

0 - 20 MPH Acceleration - 3.6 sec.

NOTE: Performance results will vary depending on load, altitude, and other conditions.

***RANGE:** Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat	\$ _____
Motor _____ H.P.	_____
Trailer	_____
Accessories	_____
T, T & L	_____
TOTAL PRICE \$	_____

SSV 239

SPECIFICATIONS

LOA 23' 5" (7.14 m.)
 Beam 100" (2.54 m.)
 Depth 58 1/2" (1.49 m.)
 Maximum Depth 69" (1.75 m.)
 Cockpit Depth 36" (.91 m.)
 Approx. Wt. w/ 5.7 MerC
 3450 lbs. (1566 kg.)
 Transom Width 90" (2.29 m.)

Transom Deadrise 19°
 LOA on Trailer 26' 10" (8.18 m.)
 Fuel Capacity 60 gal. (227.1 l.)
 Max. Load 1900 lbs. (863 kg.)
 Max. Per. 10 or 1440 lbs. (654 kg.)
 NIMMA Certified
 Draft: A. Drive Unit Up 17 1/2" (.44 m.)
 B. Drive Unit Dn. 32" (.81 m.)

STANDARD FEATURES

Deluxe instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, navigation/anchor lights, panel lights, interior lights, and horn
 Tilt steering
 Concealed electric horn
 Automatic bilge pump and blower
 Navigation lighting
 Circuit breakers
 AM/FM stereo cassette with 4 speakers
 Built-in ice chest
 Stainless steel ski tow ring
 Stainless steel bow eye and stern eyes
 8" cleats
 Stainless steel bow rails, stern rail and cockpit rails

Stainless steel vents
 Walk-thru curved glass windshield
 Bow access step
 Walk-around deck
 Flush mount deck hatch
 Anchor locker with mount
 Passenger grab handle
 Adjustable bucket/bench seating
 Sliding plex lockable cabin door
 Forward V-berth
 Cabin valances with indirect lighting
 Cabin light
 Cabin entertainment center with fresh water
 Molded swim platform
 Stainless steel boarding ladder
 Non-skid swim platform pads
 Soft top with concealed storage
 Engine compartment light
 MerC/Volvo controls

OPTIONS

Electric lift with panel
 High altitude prop
 Windshield wiper
 Halon system
 Portable head
 Canvas package: side and stern curtain
 Mooring cover
 Cockpit cover

VHF radio
 AM/FM stereo cassette with in-dash remote control
 AM/FM stereo cassette with wireless remote control
 Convenience package: depthsounder, compass, hour meter, fan
 Stainless steel prop (MerC only)

ENGINE OPTIONS

5.7 MerCruiser
 350 MerC Magnum
 7.4 MerCruiser
 454 MerC Magnum

572 DP Volvo Penta
 570 DP Volvo Penta
 740 DP Volvo Penta

COLOR OPTIONS

Bay Blue/White
 Spectra Red/White
 52

Laurel/White

SSV 239

PERFORMANCE DATA

ENGINE 350 MAG MERCUISER - PROP 19 OSS

RPM	MPH	GPH	RANGE*
3000	33	9.1	205
3500	39	13.4	165
4000	45	17.4	148
WOT	49-52	-	-

0 - 20 MPH Acceleration - 3.6 sec.

ENGINE 7.4 MERCUISER - PROP 19 MIRAGE

RPM	MPH	GPH	RANGE*
3000	32	10.5	171
3500	38	14.2	154
4000	44	20.5	120
WOT	53-57	-	-

0 - 20 MPH Acceleration - 3.3 sec.

ENGINE 740 DP VOLVO PENTA - PROP C6

RPM	MPH	GPH	RANGE*
3000	32	10.5	171
3500	38	14.2	154
4000	44	20.5	120
WOT	53-57	-	-

0 - 20 MPH Acceleration - 3.3 sec.

ENGINE 454 MAG MERC - PROP 13 3/4 X 23 MIRAGE

RPM	MPH	GPH	RANGE*
2700	25	6.0	239
3100	35	9.0	222
3500	45	14.0	182
WOT	58-62	-	-

0 - 20 MPH Acceleration - 3.3 sec.

NOTE: Performance results will vary depending on load, altitude, and other conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____
 Motor _____ H.P. _____
 Trailer _____
 Accessories _____
 T,T & L _____
TOTAL PRICE \$ _____

ENGINE INFORMATION

The following pages contain data about sterndrives offered in our 1993 product.

MODEL:

Horsepower at Prop Shaft
Horsepower at Crank Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Circuit Breaker
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height

Weight

MERCUISER 3.0 LITRE

115 hp/86 kw.
125 hp/93 kw.
4
181
9.3:1
4200-4600
40 Amp Thermal
1.98:1
Power
Power
33¹/₄"
22³/₁₆"
19⁷/₁₆" (above crankshaft CL)
27⁵/₈" (overall)
625 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Horsepower at Crank Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Circuit Breaker
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height

Weight

MERCUISER 3.0LX LITRE

135 hp/101 kw.
145 hp/108 kw.
4
181
9.3:1
4400-4800
40 Amp Thermal
1.98:1
Power
Power
33¹/₄"
22³/₁₆"
19⁷/₁₆" (above crankshaft CL)
28⁵/₈" (overall)
625 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Horsepower at Crank Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Circuit Breaker
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MERCUISER 4.3 LITRE

w/Power Steering
160 hp/116 kw.
175 hp/131 kw.
6
262
9.3:1
4400-4800
40 Amp Thermal
1.84:1
Power
Power
31¹³/₁₆"
29¹/₄"
20¹/₂" (above crankshaft CL)
802 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Horsepower at Crank Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Circuit Breaker
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MERCUISER 4.3LX LITRE

w/Power Steering
180 hp/134 kw.
205 hp/153 kw.
6
262
9.3:1
4400-4800
40 Amp Thermal
1.84:1
Power
Power
31¹³/₁₆"
29¹/₄"
20¹/₂" (above crankshaft CL)
802 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Horsepower at Crank Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Circuit Breaker
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height

Weight

MERCUISER 5.0 LITRE

w/Power Steering
190 hp/142 kw.
200 hp/149 kw.
8
305
8.5:1
4200-4600
40 Amp Thermal
1.65:1
Power
Power
36³/₁₆"
28¹/₂"
20³/₄" (above crankshaft CL)
28¹/₂" (overall)
893 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Horsepower at Crank Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Circuit Breaker
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height

Weight

MERCUISER 5.0LX LITRE

205 hp/153 kw.
230 hp/171 kw.
8
305
9.3:1
4200-4600
40 Amp Thermal
1.50:1
Power
Power
36³/₁₆"
28¹/₂"
20³/₄" (above crankshaft CL)
28¹/₂" (overall)
893 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
 Horsepower at Crank Shaft
 Cylinders
 Cubic Inches
 Compression Ratio
 Max. Recommended RPM
 Circuit Breaker
 Lower Unit Gear Ratio
 Tilt
 Trim
 Length
 Width
 Height
 Weight

MERCURISER 5.7 LITRE

w/Power Steering
 235 hp/172 kw.
 260 hp/194 kw.
 8
 350
 9.0:1
 4400-4800
 40 Amp Thermal
 1.50:1
 Power
 Power
 36¹³/₁₆"
 28¹/₂"
 20" (above crankshaft CL)
 27³/₄" (overall)
 907 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
 Horsepower at Crank Shaft
 Cylinders
 Cubic Inches
 Compression Ratio
 Max. Recommended RPM
 Circuit Breaker
 Lower Unit Gear Ratio
 Tilt
 Trim
 Length
 Width
 Height
 Weight

**MERCURISER 350
MAGNUM***

w/Power Steering
 250 hp/179 kw.
 270 hp/202 kw.
 8
 350
 9.3:1
 4400-4800
 40 Amp Thermal
 1.50:1
 Power
 Power
 36¹⁵/₁₆"
 28 ⁷/₈"
 20 ⁷/₈" (above crankshaft CL)
 938 lbs. (pkg. weight)

* Stainless steel propeller - standard

MODEL:

Horsepower at Prop Shaft
 Horsepower at Crank Shaft
 Cylinders
 Cubic Inches
 Compression Ratio
 Max. Recommended RPM
 Circuit Breaker
 Lower Unit Gear Ratio
 Tilt
 Trim
 Length
 Width
 Height
 Weight

MERCURISER 7.4 LITRE*

w/Power Steering
 300 hp/224 kw.
 330 hp/247 kw.
 8
 454
 8.5:1
 4200-4600
 40 Amp Thermal
 1.32:1
 Power
 Power
 39"
 32"
 20¹¹/₁₆" (above crankshaft CL)
 1125 lbs. (pkg. weight)

* Stainless steel propeller - standard

MODEL:

Horsepower at Prop Shaft
 Horsepower at Crank Shaft
 Cylinders
 Cubic Inches
 Compression Ratio
 Max. Recommended RPM
 Circuit Breaker
 Lower Unit Gear Ratio
 Tilt
 Trim
 Length
 Width
 Height
 Weight

**MERCURISER 454
MAGNUM***

w/Power Steering
 350 hp/269 kw.
 365 hp/273 kw.
 8
 454
 8.8:1
 4600-5000
 40 Amp Thermal
 1.50:1
 Power
 Power
 39"
 32"
 20¹⁵/₁₆" (above crankshaft CL)
 1115 lbs. (pkg. weight)

* Stainless steel propeller - standard

MODEL:

Horsepower at Prop Shaft
 Horsepower at Crank Shaft
 Cylinders
 Cubic Inches
 Compression Ratio
 Max. Recommended RPM
 Lower Unit Gear Ratio
 Tilt
 Trim
 Length
 Width
 Height
 Weight

230 SP VOLVO PENTA

110 hp/82 kw.
 120 hp/90 kw.
 4
 2.3 Litres
 9.7:1
 5000
 2.15:1
 Power
 Power
 34"
 21.7"
 26.9" (overall)
 525 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
 Horsepower at Crank Shaft
 Cylinders
 Cubic Inches
 Compression Ratio
 Max. Recommended RPM
 Lower Unit Gear Ratio
 Tilt
 Trim
 Length
 Width
 Height
 Weight

250 SP VOLVO PENTA

135 hp/101 kw.
 146 hp/109 kw.
 4
 2.5 Litres
 9.7:1
 5500
 2.15:1
 Power
 Power
 34"
 21.7"
 26.9" (overall)
 551 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
 Horsepower at Crank Shaft
 Cylinders
 Cubic Inches
 Compression Ratio
 Max. Recommended RPM
 Lower Unit Gear Ratio
 Tilt
 Trim
 Length
 Width
 Height
 Weight

430 SP VOLVO PENTA

155 hp/116 kw.
 175 hp/131 kw.
 6
 262
 9.3:1
 4800
 1.89:1
 Power
 Power
 33.6"
 14.4"
 22.3" (overall)
 782 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
 Horsepower at Crank Shaft
 Cylinders
 Cubic Inches
 Compression Ratio
 Max. Recommended RPM
 Lower Unit Gear Ratio
 Tilt
 Trim
 Length
 Width
 Height
 Weight

430 DP VOLVO PENTA

155 hp/116 kw.
 175 hp/131 kw.
 6
 4.3 Litres
 9.3:1
 4800
 1.89:1
 Power
 Power
 33.6"
 14.4"
 22.3" (overall)
 791 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
 Horsepower at Crank Shaft
 Cylinders
 Cubic Inches
 Compression Ratio
 Max. Recommended RPM
 Lower Unit Gear Ratio
 Tilt
 Trim
 Length
 Width
 Height
 Weight

431 DP VOLVO PENTA

180 hp/134 kw.
 205 hp/153 kw.
 6
 262
 9.3:1
 4800
 2.30:1
 Power
 Power
 35.6"
 14.4"
 22.3" (overall)
 791 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
 Horsepower at Crank Shaft
 Cylinders
 Cubic Inches
 Compression Ratio
 Max. Recommended RPM
 Lower Unit Gear Ratio
 Tilt
 Trim
 Length
 Width
 Height
 Weight

500 DP VOLVO PENTA

190 hp/142 kw.
 210 hp/157 kw.
 8
 5.0 Litres
 8.5:1
 4400
 1.95:1
 Power
 Power
 40"
 28.8"
 29.1" (overall)
 886 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
 Horsepower at Crank Shaft
 Cylinders
 Cubic Inches
 Compression Ratio
 Max. Recommended RPM
 Lower Unit Gear Ratio
 Tilt
 Trim
 Length
 Width
 Height
 Weight

570 DP VOLVO PENTA

245 hp/183 kw.
 275 hp/205 kw.
 8
 5.7 Litres
 8.5:1
 4600
 1.95:1
 Power
 Power
 40"
 28.8"
 29.6" (overall)
 913 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
 Horsepower at Crank Shaft
 Cylinders
 Cubic Inches
 Compression Ratio
 Max. Recommended RPM
 Lower Unit Gear Ratio
 Tilt
 Trim
 Length
 Width
 Height
 Weight

572 DP VOLVO PENTA

225 hp/167 kw.
 Not available
 8
 5.7 Litres
 8.5:1
 4600
 1.95:1
 Power
 Power
 40"
 28.8"
 29.6" (overall)
 913 lbs. (pkg. weight)

MODEL:

740 DP VOLVO PENTA

Horsepower at Prop Shaft	300 hp/220 kw.
Horsepower at Crank Shaft	330 hp/243 kw.
Cylinders	8
Cubic Inches	454
Compression Ratio	9.1:1
Max. Recommended RPM	4000-4400
Circuit Breaker	40 Amp
Lower Unit Gear Ratio	1.78:1
Tilt	Power
Trim	Power
Length	43 1/2"
Width	31 3/4"
Height	21" (overall)
Weight	1005 lbs. (pkg. weight)

NOTES



700 West River Rd., Little Falls, MN 56345
(612) 632-8395 Fax (612) 632-1438