

Glastron

1998

**Product
Specification Manual**

Table of Contents

Features and Benefits	4
Glastron Limited Warranty	6
Definitions of Boat Measurements	8
1998 Glastron Model Line-Up	9
1998 Glastron Model Specifications	10
Sterndrive Engine Information	54
Canvas Choices	59
Seating Choices	60




Five Reasons Why Our Runabouts Are Done Right.

Make sure your customer knows these five facts.


1. Our Award-Winning Hull Design.

It's our most unique feature. Until other boatbuilders top our hull design, they'll never top our performance.




2. Our BiTex Hull Construction.

Most fiberglass boat hulls actually contain more resin than fiberglass. Not ours. That's because we use BiTex® fiberglass fabric. It's tightly knitted in three directions, so it's 50% stronger. Yet because there's less resin, our hulls end up 15% lighter.




The woven roving fiberglass that's used on most boats is loose and porous, resulting in a low fiber-to-resin ratio.



BiTex fibers are tightly knitted and run in three directions. As a result, our hulls are both stronger and lighter.


3. Our Rotocast Components.

They fit better, weigh less and they're virtually indestructible. They're also easier to clean.




4. Our Fiberglass Stringer System.

Every Glastron from 16 to 22 feet is supported by our foam-filled fiberglass stringer system. It's stronger than conventional wood stringers. It's four times wider. And unlike wood stringers, it'll never rot.



Glastron's innovative foam-filled fiberglass stringer system is bigger, stronger and impervious to moisture.



Still used by many runabout manufactures, traditional wood stringers can be a primary source of wood rot in a boat.

5. Our Unmatched Warranty.

All Glastrons come with a five-year limited warranty on the hull and a two-year limited warranty on all other components.* We stand firmly behind our boats. And that's the ultimate proof of how well they're built.



*Propulsion warranties vary by manufacturer. Please see the Glastron Owner's Manual for complete details.

& Benefits

BEFORE YOU BUY YOUR CUSTOMERS SHOULD KNOW THEY ALSO COMPARE THESE FEATURES AND BENEFITS?

FEATURES =
 1. Stringer system is bonded to hull with fiberglass

2. Hull and deck joined with stainless steel screws, not popped rivets

3. Fiberglass floor over bow liner

4. Keel areas are fiberglass overlapped

5. Floor is reinforced with top to bottom knitted fiberglass

6. Hull construction includes BirtexSM knitted fiberglass

7. All deck fittings are supported by under-deck fiberglass, encapsulated

8. Motor mounts are fiberglass, encapsulated to the hull

9. Marine locknuts on bolts

10. Marine-grade carpet; one piece lock looped

BENEFITS:

Rigidity; strength

Better seal; much stronger boat overall

Eliminates wood rot problem; better appearance; stronger

Double strength in this all-important area

Protects against wood rot

Strongest, lightest and most durable lamination fabric available

Strength; durability

Strength; reduces engine vibration

Strength; long-term durability

Appearance; no seams

FEATURES:

11. Marine-grade vinyl

12. Carpeted storage areas

13. Carpeted ski locker with drain in subfloor

14. Kneeboard size ski locker

15. Tilt steering wheel standard on most models

16. All models feature automotive-style instrument panel

17. Lower, built-in platform with stainless steel boarding ladder below

18. Each new model is carefully designed for the proper weight-to-horsepower ratio

19. Choice of MerCruiser or Volvo Penta power

20. Choice of OMC or Mercury Marine Pre-Rig on all outboards

BENEFITS:

UV protected; marine-grade stitching

Appearance; padding for boating gear

Protects the ski; lets water drain away from the stringer system

Convenient storage for today's water sport toys

More comfortable steering

Easy-to-read gauges; convenient controls; improved styling

Ease of boarding

Complete design concentration on performance; better planing time; better fuel economy

Better choices for each type of boat use

Factory controls and gauges match power choice for complete package

There are many more facts and features that have allowed Glastron to be recognized as an industry leader in innovation and safety. Make sure your customers know why Glastrons are...

RUNABOUTS DONE RIGHT.™

Glastron Limited Warranty

Glastron Boats, a Division of Larson/Glastron Boats, Inc., a subsidiary of Genmar Industries, Inc. warrants to the first retail purchaser of a new Glastron boat bought from a factory authorized dealer that the hull is free from defects in materials and workmanship for a period of five (5) years, and free from defects in materials and workmanship in other components for a period of two (2) years, measured from the date of retail sale. Glastron warrants that it will repair or replace, in its sole discretion, those parts of the boat manufactured by Glastron and which are found, within reasonable judgment of Glastron, to contain defects within the applicable warranty periods.

This Glastron boat, including any alleged defective part, must be returned to an authorized Glastron dealer within the warranty period to obtain warranty service. The Glastron dealer will carry out the warranty procedures on the Purchaser's behalf. All warranty work will be performed at an authorized dealer, at the Glastron factory or at another repair facility that Glastron selects. Purchaser is responsible for the expense associated with transporting the boat to and from the repair facility.

Glastron's obligation with respect to this warranty is limited to making repairs or replacement of parts, and no claim of breach or warranty shall be cause for cancellation or recession or the contract of sale of the Glastron boat. Any action for breach of warranty relating to a boat must be brought within a period of sixty (60) days following Glastron's failure to repair or replace alleged defects.

WHAT IS NOT COVERED:

This Warranty does not cover:

1. A boat, including its components, that has been altered or modified so as to adversely affect its operation, performance or durability.
2. Engines, outdrives, controls, propellers, batteries or other equipment or accessories which are not manufactured by Glastron, whether or not warranted by other manufacturers.
3. Gelcoat finishes (including blistering, and osmotic blistering, cracking, crazing or discoloration), mirrors, window glass, chrome and chrome painted fixtures, stainless steel or aluminum finishes.
4. Leakage around windshields, hatches or other designed openings.
5. Any boat which has been misused, used in a negligent manner, used for racing, used for rental or commercial purposes, used with an

improper trailer or trailered improperly, used without proper maintenance, operated contrary to any instruction furnished by Glastron, or operated in violation of any Federal, State, Coast Guard or other governmental agency laws, rules or regulations.

6. A boat which has been overpowered, according to the maximum recommended engine horsepower specified on the capacity plate, or which has had the transom altered with bracket or jack plate.
7. Weight, speed, fuel economy or other estimated performance characteristics.
8. Loss of time, inconvenience, rental charges, travel expense, loss of use, boat payments, in-and-out-of-water charges, trailering or towing charges, storage charges, loss of or damage to personal property, or other remedies not specifically allowed.
9. Dealer preparation, adjustments, alignments and cleaning in preparing the boat for delivery.
10. Repairs made necessary by normal wear and use.

Remedy under this warranty is expressly limited to repair or replacement of defects in materials or workmanship, and **does not include incidental or consequential damages** which are specially **DISCLAIMED**.

NOTE: SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. The express limited warranty described above is exclusive. All **IMPLIED WARRANTIES ARE LIMITED IN THEIR DURATION TO THE TWO (2) YEAR WARRANTY PERIOD**. ALL IMPLIED WARRANTIES, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE **DISCLAIMED** IN THEIR ENTIRETY AFTER EXPIRATION OF THE TWO (2) YEAR WARRANTY PERIOD. There are no warranties which extend beyond the description of the face hereof.

NOTE: SOME STATES DO NOT ALLOW LIMITATION ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

This document contains the entire warranty given by Glastron. Glastron does not authorize any person or persons, including its Glastron dealers, to change the terms of this express limited warranty, which is Glastron's only warranty. Glastron reserves the right to change or improve the design or manufacture of Glastron boats without obligation to modify any boat previously manufactured.

Length Overall (LOA) — Distance along the centerline from the tip of the bow to the aft-most part of the hull.

Maximum Beam — Maximum width of the boat.

Transom Width — Maximum width of the boat at transom.

Depth — Vertical distance from lowest point of the keel to the highest point of the boat, excluding windshields, lights and other removable components.

Transom Deadrise — Angle of the hull, as measured in degrees, relative to the water.

Maximum Depth — Vertical distance from lowest point of the keel to the highest point of boat, including windshields.

Cockpit Depth — Vertical distance from boat floor to top of gunwale as measured at the driver's seat.

Length Overall on Trailer — Distance measured along the boat centerline, from forward-most point of trailer to aft-most point of motor/outdrive.

Boat Height on Trailer — Vertical distance from ground to highest point of boat, including windshield.

Draft (drive unit up) — Total number of inches of boat and/or motor and drive unit below the waterline. Measured unloaded, with the motor/drive unit in the full up position.

Draft (drive unit down) — Total number of inches of boat and/or motor and drive unit below the waterline. Measured unloaded, with the motor/drive unit in the full down position.

SPECIAL EDITIONS

- SE 170
- SE 175
- SE 177
- SE 195
- SE 199
- SE 175 SKI & FISH

OUTBOARDS

- GS 160
- GS 180

STERNDRIVE RUNABOUTS

- GS 185
- GS 187
- GS 205
- GS 225
- GS 235

SKI & FISH

- GS 160 SKI & FISH
- GS 180 SKI & FISH
- GS 185 SKI & FISH
- GS 205 SKI & FISH

SPORT CRUISERS

- GS 209
- GS 229
- GS 249

GLASTRON/CARLSONS

- CSX 17 (December 1, 1997)
- CSX 21
- CSX 23

MODEL DESIGNATOR CODE

- 0-Outboard
- 5-Open Bow Sterndrive
- 7-Closed Bow Sterndrive
- 9-Cuddy Cabin Sterndrive

Specifications

LOA 17' 1" (5.21 m.)	Transom Deadrise 21°
Beam 88" (2.24 m.)	LOA on Trailer 21' 6" (6.55 m.)
Depth 43" (1.09 m.)	Fuel Capacity 20 gal. (75.7 L.)
Maximum Depth 59" (1.5 m.)	Maximum Load 1800 lbs. (810 kg.)
Cockpit Depth 28½" (.72 m.)	Max. Person 8 or 1150 lbs. (518 kg.)
Approx. Wt. 1125 lbs. (506 kg.)	Maximum Horsepower 140
Transom Width 73¼" (1.86 m.)	NMMA Certified
Draft: A. Drive Unit Up 15½" (.39 m.)	
B. Drive Unit Down 28½" (.72 m.)	

Standard Features

Instrument panel includes: speedometer, tachometer, and fuel gauges; plus switches for bilge pump, navigation/anchor light, panel lights, horn, and accessories	Stainless steel bow eye and stern eyes
Electric horn	6" cleats
Bilge pump	Walk-thru curved full glass windshield
Navigation lighting	Wraparound bow seats
AM/FM stereo cassette with 2 speakers	Bow storage drawers
Glove box	Passenger grab handle
Ski locker	Adjustable bucket/bench seating
	Molded swim platform
	Stainless steel boarding ladder
	Soft top with concealed storage and boot

Options

Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain	Automatic bilge pump
Mooring cover	Dual cable steering
Cockpit cover	Ski tow pylon
Bow cover	Convenience Package: hour meter, depth sounder
Clarion stereo cassette M3170 with 2 speakers	Tilt steering
Clarion stereo CD M4275 with 2 speakers	Telescopic 3-step boarding ladder

Engine Choices

OMC Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom, OMC Systems check	90 hp Mercury or Mariner*
Mercury Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom	115 hp Mercury or Mariner*
	135 hp Mercury or Mariner*
	90 hp Force*
	120 hp Force*
	<i>*(Engine will be shipped from Mercury/Mariner; boat will be pre-rigged with Mercury/Mariner or Force parts)</i>

Color Choices

Cypress Teal/Beige	Navy Blue/Beige
--------------------	-----------------

SE 170 Performance Data

Engine 90 Evinrude — Prop 13¼ x 17

RPM	MPH	GPH	RANGE*
2500	15	2.9	88
3400	25	4.2	102
4600	35	6.3	95
WOT	38-40	—	—

0-20 MPH Acceleration — 3.3 sec.

Engine 115 Evinrude — Prop 12½ x 21

RPM	MPH	GPH	RANGE*
2500	15	3.6	71
3300	25	4.6	92
4700	35	7.2	83
WOT	42-44	—	—

0-20 MPH Acceleration — 3.2 sec.

Engine 130 Johnson — Prop 14¼ x 21

RPM	MPH	GPH	RANGE*
2100	15	3.5	73
3300	25	4.4	97
4000	35	6.9	87
WOT	45-46	—	—

0-20 MPH Acceleration — 3.2 sec.

Engine 135 Mercury (V6) — Prop 13¼ x 21 S/S Laser

RPM	MPH	GPH	RANGE*
2400	15	4.2	71
3000	25	5.1	87
4000	35	7.1	82
WOT	45-48	—	—

0-20 MPH Acceleration — 3.1 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

Sale Price

Boat	\$	_____
Motor _____ H.P.		_____
Trailer		_____
Accessories		_____
T, T & L		_____
TOTAL PRICE \$		_____

Specifications

LOA 17' 1" (5.21 m.)	Transom Width 73 3/4" (1.86 m.)
Beam 88" (2.24 m.)	Transom Deadrise 21°
Depth 43" (1.09 m.)	LOA on Trailer 21' 6" (6.55 m.)
Maximum Depth 59" (1.5 m.)	Fuel Capacity 20 gal. (75.7 L.)
Cockpit Depth 28 1/2" (.72 m.)	Maximum Load 1250 lbs. (563 kg.)
Approx. Wt. w/3.0 Volvo Penta 1650 lbs. (743 kg.)	Max. Person 8 or 1150 lbs. (518 kg.)
	NMMA Certified
Draft: A. Drive Unit Up 16" (.41 m.)	
B. Drive Unit Down 31" (.79 m.)	

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, volt-meter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories	Stainless steel bow eye and stern eyes 6" cleats
Electric horn	Walk-thru curved full glass windshield
Bilge pump and blower	Wraparound bow seats
Navigation lighting	Bow storage drawers
AM/FM stereo cassette with 2 speakers	Passenger grab handle
Glove box	Fold-out sleeper seats with aft jump seats
Ski locker	Molded swim platform
Ski tow ring	Stainless steel boarding ladder
	Soft top with concealed storage and boot
	Merc/Volvo prop

Options

Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain	Automatic bilge pump
Mooring cover	High altitude prop
Cockpit cover	Convenience Package: hour meter, depth sounder
Bow cover	SL Seating: 2 bucket seats, aft bench seating, sun lounge
Clarion stereo cassette M3170 with 2 speakers	Tilt steering
Clarion stereo CD M4275 with 2 speakers	Telescopic 3-step boarding ladder

Engine Choices

3.0L MerCruiser (WOPS)	3.0 GS Volvo Penta (WOPS)
3.0L MerCruiser (WPS)	3.0 GS Volvo Penta (WPS)
4.3L MerCruiser	4.3 GL Volvo Penta

Color Choices

Cypress Teal/Beige	Navy Blue/Beige
--------------------	-----------------

SE 175 Performance Data

Engine 3.0L MerCruiser — Prop 13 1/4 x 21 AL			
RPM	MPH	GPH	RANGE*
2100	15	2.5	102
2900	25	3.5	121
3500	35	7.4	80
WOT	42-45	—	—

0-20 MPH Acceleration — 3.4 sec.

Engine 3.0 GS Volvo Penta — Prop 15 x 17			
RPM	MPH	GPH	RANGE*
2000	10	2.1	81
3000	20	3.2	106
4000	35	7.6	78
WOT	41-43	—	—

0-20 MPH Acceleration — 3.7 sec.

Engine 4.3 GL Volvo Penta — Prop 14 x 21 AL			
RPM	MPH	GPH	RANGE*
2400	15	3.0	90
3200	25	4.0	112
3700	35	7.9	77
WOT	46-48	—	—

0-20 MPH Acceleration — 3.2 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

Sale Price

Boat	\$ _____
Motor _____ H.P.	_____
Trailer	_____
Accessories	_____
T, T & L	_____

TOTAL PRICE \$ _____

Specifications

LOA 17' 1" (5.21 m.)
 Beam 88" (2.24 m.)
 Depth 43" (1.09 m.)
 Maximum Depth 59" (1.5 m.)
 Cockpit Depth 28 1/2" (.72 m.)
 Approx. Wt w/3.0 GS Volvo Penta 1650 lbs. (743 kg.)

Transom Width 73 1/4" (1.86 m.)
 Transom Deadrise 21°
 LOA on Trailer 21' 6" (6.55 m.)
 Fuel Capacity 20 gal. (75.7 L.)
 Maximum Load 1250 lbs. (563 kg.)
 Max. Person 8 or 1150 lbs. (518 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.)
 B. Drive Unit Down 31" (.79 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories

Electric horn
 Bilge pump and blower
 Navigation lighting
 AM/FM stereo cassette with 2 speakers
 Glove box
 Ski locker
 Ski tow ring

Lockable bow storage compartment
 Stainless steel bow eye and stern eyes
 6" cleats
 Walk-thru curved full glass windshield
 Bow anchor locker
 Passenger grab handle
 Two bucket seats/aft bench seating/sunlounge
 Molded swim platform
 Stainless steel boarding ladder
 Soft top with concealed storage and boot
 Merc/Volvo prop

Options

Canvas Package: side curtains, stern curtain
 Mooring cover
 Cockpit cover
 Clarion stereo cassette M3170 with 2 speakers
 Clarion stereo CD M4275 with 2 speakers

Tilt steering
 Automatic bilge pump
 Bow pad
 High altitude prop
 Convenience Package: hour meter, depth sounder
 Telescopic 3-step boarding ladder

Engine Choices

3.0L MerCruiser (WOPS)
 3.0L MerCruiser (WPS)
 4.3L MerCruiser

3.0 GS Volvo Penta (WOPS)
 3.0 GS Volvo Penta (WPS)
 4.3 GL Volvo Penta

Color Choices

Cypress Teal/Beige

Navy Blue/Beige

SE 177 Performance Data

Engine 3.0L MerCruiser — Prop 13 1/4 x 21 AL			
RPM	MPH	GPH	RANGE*
2100	15	2.5	102
2900	25	3.5	121
3500	35	7.4	80
WOT	42-45	—	—

0-20 MPH Acceleration — 3.4 sec.

Engine 3.0 GS Volvo Penta — Prop 15 x 17			
RPM	MPH	GPH	RANGE*
2000	10	2.1	81
3000	20	3.2	106
4000	35	7.6	78
WOT	41-43	—	—

0-20 MPH Acceleration — 3.7 sec.

Engine 4.3 GL Volvo Penta — Prop 14 x 21 AL			
RPM	MPH	GPH	RANGE*
2400	15	3.0	90
3200	25	4.0	112
3700	35	7.9	77
WOT	46-48	—	—

0-20 MPH Acceleration — 3.2 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.
 *Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 18' 7" (5.66 m.)	Transom Width 75" (1.9 m.)
Beam 90 3/4" (2.31 m.)	Transom Deadrise 21°
Depth 47" (1.19 m.)	LOA on Trailer 22' (6.71 m.)
Maximum Depth 63" (1.6 m.)	Fuel Capacity 35 gal (132.5 L.)
Cockpit Depth 28 3/4" (.73 m.)	Maximum Load 1500 lbs. (675 kg.)
Approx. Wt. w/4.3L MerCruiser	Max. Person 10 or 1410 lbs. (635 kg.)
2000 lbs. (900 kg.)	NMMA Certified
Draft: A. Drive Unit Up 16 1/2" (.42 m.)	
B. Drive Unit Down 31 1/2" (.8 m.)	

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, volt-meter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories	6" cleats
Electric horn	Walk-thru curved full glass windshield
Bilge pump and blower	Wraparound bow seats
Navigation lighting	Bow storage drawers
AM/FM stereo cassette with 2 speakers	Anchor locker
Glove box	Passenger grab handle
Ski locker	Adjustable fold-out sleeper seats with aft jump seats
Ski tow ring	Molded swim platform
Stainless steel bow eye and stern eyes	Stainless steel boarding ladder
	Soft top with concealed storage and boot
	Merc/Volvo prop

Options

Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain	Automatic bilge pump
Mooring cover	High altitude prop
Cockpit cover	Convenience Package: hour meter, depth sounder
Bow cover	SL Seating: 2 bucket seats/aft bench seat/sunlounge
Clarion stereo cassette M3170 with 2 speakers	Tilt steering
Clarion stereo CD M4275 with 2 speakers	Telescopic 3-step boarding ladder

Engine Choices

3.0L MerCruiser (WOPS)	3.0 GS Volvo Penta (WOPS)
3.0L MerCruiser (WPS)	3.0 GS Volvo Penta (WPS)
4.3L MerCruiser	4.3 GL Volvo Penta
5.0L MerCruiser	5.0 GL Volvo Penta

Color Choices

Cypress Teal/Beige	Navy Blue/Beige
--------------------	-----------------

SE 195 Performance Data

Engine 4.3L MerCruiser — Prop 13 3/4 x 21 AL

RPM	MPH	GPH	RANGE*
2400	15	3.0	160
3200	25	4.0	202
3700	35	7.9	141
WOT	47-49	—	—

0-20 MPH Acceleration — 3.3 sec.

Engine 3.0 GS Volvo Penta — Prop 15 x 17 AL

RPM	MPH	GPH	RANGE*
2300	15	2.8	179
3000	25	3.8	211
3800	35	7.8	144
WOT	42-44	—	—

0-20 MPH Acceleration — 3.7 sec.

Engine 4.3 GL Volvo Penta — Prop 15 X 17 AL

RPM	MPH	GPH	RANGE*
2000	15	2.8	161
3000	25	3.8	197
4000	35	6.9	152
WOT	45-47	—	—

0-20 MPH Acceleration — 3.2 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 18' 7" (5.66 m.)	Transom Width 75" (1.9 m.)
Beam 90 3/4" (2.31 m.)	Transom Deadrise 21°
Depth 53" (1.34 m.)	LOA on Trailer 22' (6.71 m.)
Maximum Depth 69" (1.75 m)	Fuel Capacity 35 gal (132.5 L.)
Cockpit Depth 35" (.89 m.)	Maximum Load 1500 lbs. (675 kg.)
Approx. Wt. w/4.3L MerCruiser	Max. Person 8 or 1150 lbs. (635 kg.)
2000 lbs. (900 kg.)	NMMA Certified
Draft: A. Drive Unit Up 16 1/2" (.42 m.)	
B. Drive Unit Down 31 1/2" (.8 m.)	

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, volt-meter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories	Stainless steel bow rails
Electric horn	Passenger grab handle
Automatic bilge pump	Starboard bucket seat/port sleeper seat w/aft jump seats
Blower	Molded swim platform
Navigation lighting	Lockable cabin doors
AM/FM stereo cassette with 2 speakers	Cabin light
Ski tow ring	Forward V-berth
Stainless steel bow eye and stern eyes	Forward deck hatch w/screen
6" cleats	Stainless steel boarding ladder
	Soft top with concealed storage and boot
	Merc/Volvo prop
	Bow anchor locker

Options

Canvas Package: side curtains, stern curtain	Tilt steering
Mooring cover	High altitude prop
Cockpit cover	Convenience Package: hour meter, depth sounder
Clarion Stereo cassette M3170 with 2 speakers	SL Seating: 2 bucket seats/aft bench seat/sunlounge
Clarion stereo CD M4275 with 2 speakers	Telescopic 3-step boarding ladder

Engine Choices

3.0L MerCruiser (WOPS)	3.0 GS Volvo Penta (WOPS)
3.0L MerCruiser (WPS)	3.0 GS Volvo Penta (WPS)
4.3L MerCruiser	4.3 GL Volvo Penta
5.0L MerCruiser	5.0 GL Volvo Penta

Color Choices

Cypress Teal/Beige	Navy Blue/Beige
--------------------	-----------------

SE 199 Performance Data

Engine 4.3L MerCruiser — Prop 13 3/4 x 21 AL			
RPM	MPH	GPH	RANGE*
2400	15	3.0	160
3200	25	4.0	202
3700	35	7.9	141
WOT	47-49	—	—
0-20 MPH Acceleration — 3.4 sec.			

Engine 3.0 GS Volvo Penta — Prop 15 x 17 AL			
RPM	MPH	GPH	RANGE*
2300	15	2.8	179
3000	25	3.8	211
3800	35	7.8	144
WOT	42-44	—	—
0-20 MPH Acceleration — 3.8 sec.			

Engine 4.3 GL Volvo Penta — Prop 15 X 17 AL			
RPM	MPH	GPH	RANGE*
2000	15	2.8	161
3000	25	3.8	197
4000	35	6.9	152
WOT	45-47	—	—
0-20 MPH Acceleration — 3.5 sec.			

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.
 *Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 17' 1" (5.21 m.)	Transom Width 73 1/4" (1.86 m.)
Beam 88" (2.24 m.)	Transom Deadrise 21°
Depth 43" (1.09 m.)	LOA on Trailer 21' 6" (6.55 m.)
Maximum Depth 59" (1.5 m.)	Fuel Capacity 20 gal. (75.7 L.)
Cockpit Depth 28 1/2" (.72 m)	Maximum Load 1250 lbs. (538 kg.)
Approx. Wt. w/3.0L MerCruiser	Max. Person 8 or 1150 lbs. (518 kg.)
1750 lbs. (788 kg.)	NMMA Certified
Draft: A. Drive Unit Up 16" (.41 m.)	
B. Drive Unit Down 31" (.79 m.)	

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, volt-meter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights and accessories	Walk-thru curved open glass windshield
Bow panel includes: aerator switch, volt-meter, tilt switch, battery charger switch, battery selector switch, trolling motor plug	Wraparound bow seats
Electric horn	Bow converts to fishing deck
Bilge pump and blower	2 adjustable bucket seats/2 removable fishing seats/bench seat
Navigation lighting	Passenger grab handle
AM/FM stereo cassette with 2 speakers	Molded swim platform
Glove box	Stainless steel boarding ladder
Ski locker	Convertible stern sundeck/fishing platform
Ski tow ring	Soft top with concealed storage and boot
Stainless steel bow eye and stern eyes	Aerated livewell
6" cleats	Trolling motor mount
	Trolling motor battery trays
	Rod holder
	Tackle box trays
	Merc/Volvo prop
	Removable ice chest

Options

Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain	Automatic bilge pump
Mooring cover	Fishing Package: trolling motor, fish finder
Cockpit cover	High altitude prop
Bow cover	Convenience Package: hour meter, depth sounder
Clarion stereo cassette M3170 with 2 speakers	Tilt steering
Clarion stereo CD M4275 with 2 speakers	Telescopic 3-step boarding ladder

Engine Choices

3.0L MerCruiser (WOPS)	3.0 GS Volvo Penta (WOPS)
3.0L MerCruiser (WPS)	3.0 GS Volvo Penta (WPS)
4.3L MerCruiser	4.3 GL Volvo Penta

Color Choices

Cypress Teal/Beige	Navy Blue/Beige
--------------------	-----------------

SE 175SF Performance Data

Engine 3.0L MerCruiser — Prop 13 1/4 x 21 AL

RPM	MPH	GPH	RANGE*
2100	15	2.5	102
2900	25	3.5	121
3500	35	7.4	80
WOT	42-45	—	—

0-20 MPH Acceleration — 3.4 sec.

Engine 3.0 GS Volvo Penta — Prop 15 x 17

RPM	MPH	GPH	RANGE*
2000	10	2.1	81
3000	20	3.2	106
4000	35	7.6	78
WOT	41-43	—	—

0-20 MPH Acceleration — 3.7 sec.

Engine 4.3 GL Volvo Penta — Prop 14 x 21 AL

RPM	MPH	GPH	RANGE*
2400	15	3.0	90
3200	25	4.0	112
3700	35	7.9	77
WOT	46-48	—	—

0-20 MPH Acceleration — 3.2 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 15' 11½" (4.86 m.)
 Beam 84" (2.13 m.)
 Depth 37" (.94 m.)
 Maximum Depth 42" (1.07 m.)
 Cockpit Depth 24" (.61 m.)
 Approx. Wt. 1050 lbs. (473 kg.)
 Transom Width 82" (2.08 m.)

Transom Deadrise 13°
 LOA on Trailer 20' 10" (6.35 m.)
 Fuel Capacity 16 gal. (60.6 L.)
 Maximum Load 1292 lbs. (581 kg.)
 Max. Person 5 or 725 lbs. (326 kg.)
 Maximum Horsepower 120
 NMMA Certified

Draft: A. Drive Unit Up 15½" (.39 m.)
 B. Drive Unit Down 28½" (.72 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, fuel and trim gauges; plus switches for bilge pump, navigation/anchor lights, panel lights, horn, and accessories

Electric horn
 Bilge pump
 Navigation lighting
 AM/FM stereo cassette with 2 speakers
 Glove box
 Ski/kneeboard locker

Stainless steel bow eye and stern eyes
 4" cleats
 Smoked plex windscreen
 Wraparound bow seats
 Bow storage compartments
 Passenger grab handle
 Bucket/bench seating
 Molded swim platform
 Stainless steel boarding ladder
 Rear ski storage rack

Options

Mooring cover
 Dual cable steering
 Clarion stereo M3170 with 2 speakers
 Clarion stereo CD M4275 with 2 speakers

Ski tow pylon
 Automatic bilge pump
 Skiff windshield
 Soft top with boot (skiff windshield only)

Engine Choices

OMC Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom, OMC systems check

Mercury Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom

75 hp Mercury or Mariner*
 90 hp Mercury or Mariner*
 115 hp Mercury or Mariner*
 75 hp Force*
 90 hp Force*
 120 hp Force*

*(Engine will be shipped from Mercury Marine; boat will be pre-rigged with Mercury/Mariner or Force parts)

Color Choices

Purple/White Red/White Teal/White

GS 160 Performance Data

Engine 90 Evinrude — Prop 13¼ x 17

RPM	MPH	GPH	RANGE*
2500	15	2.5	86
3400	25	4.0	90
4600	35	6.0	84
WOT	42-44	—	—

0-20 MPH Acceleration — 3.3 sec.

Engine 115 Evinrude — Prop 12¾ x 21

RPM	MPH	GPH	RANGE*
2500	15	3.4	63
3300	25	4.3	84
4700	35	7.0	72
WOT	46-48	—	—

0-20 MPH Acceleration — 3.2 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

GS 180

Specifications

LOA 17' 10 1/2" (5.46 m.)
 Beam 89 1/2" (2.28 m.)
 Depth 43" (1.09 m.)
 Maximum Depth 53" (1.35 m.)
 Cockpit Depth 28 1/2" (.72 m.)
 Approx. Wt. 1300 lbs. (585 kg.)
 Transom Width 84 1/2" (2.15 m.)

Transom Deadrise 20°
 LOA on Trailer 22' (6.71 m.)
 Fuel Capacity 20 gal (75.7 L.)
 Maximum Load 1798 lbs. (809 kg.)
 Max. Person 8 or 1150 lbs. (518 kg.)
 Maximum Horsepower 150
 NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.)
 B. Drive Unit Down 29" (.74 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, fuel and trim gauges; plus switches for bilge pump, navigation/anchor lights, panel lights, horn, and accessories

Electric horn
 Navigation lighting
 AM/FM stereo cassette with 2 speakers
 Glove box
 Ski/kneeboard locker
 Tilt steering
 Dual cable steering
 Bilge pump

Stainless steel bow eye and stern eyes
 6" cleats
 Walk-thru curved full glass windshield
 Wraparound hinged bow seats w/storage
 Passenger grab handle
 Adjustable buckets/bench seating
 Molded swim platform
 Stainless steel boarding ladder
 Sunbrella soft top & boot with concealed storage
 Gelcoat accent stripes
 Courtesy lights

Options

Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain
 Mooring cover
 Bow cover
 Cockpit cover
 Clarion stereo cassette M3170 with 4 speakers
 Clarion stereo CD M4275 with 4 speakers
 Stainless steel bow rail package

Ski tow pylon
 Convenience Package: hour meter, depth sounder
 Power antenna (Clarion stereos only)
 Telescopic stern light
 Automatic bilge pump
 Bow filler cushion with table
 Telescopic 3-step boarding ladder

Engine Choices

OMC Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom, OMC systems check

Mercury Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom

115 hp Mercury or Mariner*
 135 hp Mercury or Mariner*
 150 hp Mercury or Mariner*
 120 hp Force*
 *Engine will be shipped from Mercury Marine; boat will be pre-rigged with Mercury/Mariner or Force parts)

Color Choices

Cardinal Red/Beige
 Cypress Teal/Beige

Navy Blue/Beige
 Rosewood/Beige

GS 180 Performance Data

Engine 90 Evinrude — Prop 13 1/2 x 17

RPM	MPH	GPH	RANGE*
2500	15	2.9	88
3400	25	4.2	102
4600	35	6.3	95
WOT	38-40	—	—

0-20 MPH Acceleration — 3.3 sec.

Engine 115 Evinrude — Prop 12 1/2 x 21

RPM	MPH	GPH	RANGE*
2500	15	3.6	71
3300	25	4.6	92
4700	35	7.2	83
WOT	42-44	—	—

0-20 MPH Acceleration — 3.2 sec.

Engine 135 Mercury (V6) — Prop 13 1/2 x 21 S/S Laser

RPM	MPH	GPH	RANGE*
2400	15	4.2	64
3000	25	5.1	88
4000	35	7.1	86
WOT	46-49	—	—

0-20 MPH Acceleration — 3.1 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.
 *Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 18' (5.49 m.)	Transom Width 84½" (2.15 m.)
Beam 89¾" (2.28 m.)	Transom Deadrise 20°
Depth 43" (1.09 m)	LOA on Trailer 21' 6" (6.55 m.)
Maximum Depth 53" (1.35 m.)	Fuel Capacity 20 gal. (75.7L)
Cockpit Depth 28¾" (.72 m.)	Maximum Load 1150 lbs. (518 kg.)
Approx. Wt. w/4.3 GL Volvo Penta 2100 lbs. (945 kg.)	Max. Person 8 or 1150 lbs. (518 kg.)
	NMMA Certified
Draft: A. Drive Unit Up 16" (.41 m.)	
B. Drive Unit Down 31" (.79 m.)	

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories	6" cleats
Electric horn	Wraparound hinged bow seats w/storage
Navigation lighting	Walk-thru curved full glass windshield
AM/FM stereo cassette with 2 speakers	Passenger grab handle
Glove box	Adjustable fold-out sleeper seats with aft jump seats
Ski tow ring	Molded swim platform
Ski/kneeboard locker	Stainless steel boarding ladder
Stainless steel bow eye and stern eyes	Sunbrella soft top & boot with concealed storage
Bilge pump and blower	Gelcoat accent stripes
Tilt steering	Merc/Volvo controls
	Merc/Volvo prop
	Courtesy lights

Options

Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain	Telescopic stern light
Mooring cover	SL Seating: 2 bucket seats/aft bench seating/sunlounge
Cockpit cover	Adjustable starboard bucket/port sleeper seating/aft jump seats
Bow cover	Bow filler cushion with table
High altitude prop	Convenience Package: hour meter, depth sounder
Clarion stereo cassette M3170 with 4 speakers	Rail Package: stainless steel bow and stern rails, stainless steel grab handles
Clarion stereo CD M4275 with 4 speakers	Power antenna (Clarion stereos only)
Automatic bilge pump	
Telescopic 3-step boarding ladder	

Engine Choices

3.0L MerCruiser (WOPS)	3.0 GS Volvo Penta (WOPS)
3.0L MerCruiser (WPS)	3.0 GS Volvo Penta (WPS)
4.3L MerCruiser	4.3 GL Volvo Penta

Color Choices

Cardinal Red/Beige	Navy Blue/Beige
Cypress Teal/Beige	Rosewood/Beige

GS 185 Performance Data

Engine 3.0L MerCruiser — Prop 13¾ x 21 AL

RPM	MPH	GPH	RANGE*
2100	15	2.5	102
2900	25	3.5	121
3500	35	7.4	85
WOT	42-45	—	—

0-20 MPH Acceleration — 3.4 sec.

Engine 3.0 GS Volvo Penta — Prop 15 x 17 AL

RPM	MPH	GPH	RANGE*
2000	10	2.1	81
3000	20	3.2	106
4000	35	7.6	82
WOT	41-43	—	—

0-20 MPH Acceleration — 3.7 sec.

Engine 4.3 GL Volvo Penta — Prop 14 x 19 AL

RPM	MPH	GPH	RANGE*
2200	15	3.0	90
2900	25	4.0	113
3400	35	7.9	80
WOT	47-49	—	—

0-20 MPH Acceleration — 3.2 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

Sale Price

Boat	\$ _____
Motor _____ H.P.	_____
Trailer	_____
Accessories	_____
T, T & L	_____
TOTAL PRICE \$	_____

Specifications

LOA 18' (5.49 m.)
 Beam 89 1/2" (2.28 m.)
 Depth 43" (1.09 m.)
 Maximum Depth 53" (1.35 m.)
 Cockpit Depth 28 1/2" (.72 m.)
 Approx. Wt. w/4.3 GL Volvo Penta 2100 lbs. (945 kg.)

Transom Width 84 1/2" (2.15 m.)
 Transom Deadrise 20°
 LOA on Trailer 21' 6" (6.55 m.)
 Fuel Capacity 20 gal. (75.7 L.)
 Maximum Load 1150 lbs. (518 kg.)
 Max. Person 8 or 1150 lbs. (518 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.)
 B. Drive Unit Down 31" (.79 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, volt-meter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories

Electric horn
 Navigation lighting
 AM/FM stereo cassette with 2 speakers
 Glove box
 Ski/kneeboard locker
 Ski tow ring
 Stainless steel bow eye and stern eyes
 Bilge pump and blower
 Courtesy lights
 Bow anchor locker

Tilt steering
 6" cleats
 Walk-thru curved full glass windshield
 Bow access step
 Passenger grab handle
 Molded swim platform
 Stainless steel boarding ladder
 Sunbrella soft top & boot with concealed storage
 Gelcoat accent stripes
 Merc/Volvo controls
 SL seating: 2 bucket seats/aft bench seating/sunlounge
 Merc/Volvo prop
 Lockable bow storage compartment

Options

Canvas Package: side curtains, stern curtain
 Mooring cover
 Cockpit cover
 Clarion stereo cassette M3170 with 4 speakers
 Clarion stereo CD M4275 with 4 speakers
 Automatic bilge pump

Telescopic 3-step boarding ladder
 High altitude prop
 Bow pad
 Convenience Package: hour meter, depth sounder
 Power antenna (Clarion stereos only)
 Telescopic stern light
 Stern rail package

Engine Choices

3.0L MerCruiser (WOPS)
 3.0L MerCruiser (WPS)
 4.3L MerCruiser

3.0 GS Volvo Penta (WOPS)
 3.0 GS Volvo Penta (WPS)
 4.3 GL Volvo Penta

Color Choices

Cardinal Red/Beige
 Cypress Teal/Beige

Navy Blue/Beige
 Rosewood/Beige

GS 187 Performance Data

Engine 3.0L MerCruiser — Prop 13 1/4 x 21 AL			
RPM	MPH	GPH	RANGE*
2100	15	2.5	102
2900	25	3.5	121
3500	35	7.4	85
WOT	42-45	—	—

0-20 MPH Acceleration — 3.4 sec.

Engine 3.0 GS Volvo Penta — Prop 15 x 17 AL			
RPM	MPH	GPH	RANGE*
2000	10	2.1	81
3000	20	3.2	106
4000	35	7.6	82
WOT	41-43	—	—

0-20 MPH Acceleration — 3.7 sec.

Engine 4.3 GL Volvo Penta — Prop 14 x 19 AL			
RPM	MPH	GPH	RANGE*
2200	15	3.0	90
2900	25	4.0	113
3400	35	7.9	80
WOT	47-49	—	—

0-20 MPH Acceleration — 3.2 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.
 *Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 19' 11" (6.07 m.)	Transom Width 88 1/2" (2.25 m.)
Beam 93 1/2" (2.37 m.)	Transom Deadrise 20°
Depth 45 3/4" (1.16 m.)	LOA on Trailer 24' 8" (7.52 m.)
Maximum Depth 56 1/2" (1.4 m.)	Fuel Capacity 34 gal. (128.69 L.)
Cockpit Depth 31 3/4" (.81 m.)	Maximum Load 1450 lbs. (653 kg.)
Approx. Wt. w/ 5.0 GL Volvo Penta	Max. Person 10 or 1450 lbs. (653 kg.)
2499 lbs. (1125 kg.)	NMMA Certified
Draft: A. Drive Unit Up 16 1/2" (.42 m.)	
B. Drive Unit Down 31 1/2" (.8 m.)	

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories	Wraparound hinged bow seats w/storage
Electric horn	Courtesy lights
AM/FM stereo cassette with 2 speakers	Passenger grab handle
Glove box	Adjustable fold-out sleeper seats with aft jump seats
Ski/kneeboard locker	Molded swim platform
Ski tow ring	Stainless steel boarding ladder
Stainless steel bow eye and stern eyes	Sunbrella soft top and boot with concealed storage
6" cleats	Gelcoat accent stripes
Walk-thru curved full glass windshield	Merc/Volvo controls
Bilge pump and blower	Tilt steering
	Merc/Volvo prop

Options

Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain	SL Seating: 2 bucket seats/aft bench seating/sunlounge
Mooring cover	Adjustable starboard bucket/port sleeper seating/aft jump seats
Cockpit cover	Bow filler cushion with table
Bow cover	Convenience Package: hour meter, depth sounder
High altitude prop	Rail Package: Stainless steel bow and stern rails, stainless steel grab handles
Clarion stereo cassette M3170 with 4 speakers	Power antenna (Clarion stereos only)
Clarion stereo CD M4275 with 4 speakers	Telescopic stern light
Stainless steel prop (Merc only)	
Automatic bilge pump	
Telescopic 3-step boarding ladder	

Engine Choices

4.3L MerCruiser	4.3 GL Volvo Penta
4.3L Bravo III MerCruiser	4.3 GL DP Volvo Penta
5.0L MerCruiser	5.0 GL Volvo Penta
5.0L EFI MerCruiser	5.0 Gi Volvo Penta
5.7L MerCruiser	5.7 GS II Volvo Penta
5.7L Bravo III MerCruiser	5.7 GS II DP Volvo Penta
5.7L EFI MerCruiser	5.7 GSi II Volvo Penta

Color Choices

Cardinal Red/Beige	Cypress Teal/Beige	Navy Blue/Beige	Rosewood/Beige
--------------------	--------------------	-----------------	----------------

GS 205 Performance Data

Engine 4.3L MerCruiser — Prop 13 1/4 x 21 AL			
RPM	MPH	GPH	RANGE*
2400	15	3.0	160
3200	25	4.0	202
3700	35	7.9	141
WOT	46-48	—	—

0-20 MPH Acceleration — 3.3 sec.

Engine 4.3 GL Volvo Penta — Prop 14 x 19 AL			
RPM	MPH	GPH	RANGE*
2000	15	2.8	161
3000	25	3.8	197
4000	35	6.9	152
WOT	45-47	—	—

0-20 MPH Acceleration — 3.4 sec.

Engine 5.7L MerCruiser — Prop 14 x 19 AL			
RPM	MPH	GPH	RANGE*
2200	15	3.3	144
2800	25	4.3	186
3500	35	8.0	141
WOT	54-56	—	—

0-20 MPH Acceleration — 3.1 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

Sale Price

Boat	\$	_____
Motor _____ H.P.		_____
Trailer		_____
Accessories		_____
T, T & L		_____
TOTAL PRICE	\$	_____

Specifications

LOA 22' (6.71 m.)
 Beam 101 1/2" (2.58 m.)
 Depth 48" (1.22 m.)
 Maximum Depth 60" (1.52 m.)
 Cockpit Depth 34" (.86 m.)
 Approx. Wt. w/ 5.7L MerCruiser
 3300 lbs. (1485 kg.)

Draft: A. Drive Unit Up 17 1/2" (.44 m.)
 B. Drive Unit Down 33" (.84 m.)

Transom Width 95 1/4" (29.18 m.)
 Transom Deadrise 20°
 LOA on Trailer 25' 10" (7.87 m.)
 Fuel Capacity 47 gal. (177.9 L.)
 Maximum Load 1600 lbs. (720 kg.)
 Max. Person 11 or 1551 lbs. (698 kg.)
 NMMA Certified

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, volt-meter and engine temperature gauges; plus switches for bilge pump, blower, navigation/anchor lights, panel lights, interior lights and horn, hour meter and depth sounder
 Electric horn
 Navigation lighting
 Clarion stereo cassette M3170 w/4 speakers
 Lockable glove box
 Ski locker
 Ski tow ring
 Stainless steel bow eye and stern eyes
 6" cleats
 Bilge pump and blower
 Courtesy lights
 Walk-thru curved full glass windshield

Wraparound bow seats w/storage
 Telescopic 3-step boarding ladder
 Anchor locker
 Passenger grab handle
 SL Seating: bucket seats/aft bench seating/sunlounge
 Molded swim platform
 Stainless steel telescopic 3-step boarding ladder
 Sunbrella soft top and boot with concealed storage
 Gelcoat accent stripes
 Merc/Volvo controls
 Merc/Volvo prop
 Tilt steering
 Premier Package: stainless steel bow and stern rails, stainless steel grab handles, power antenna, telescopic stern light

Options

Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain
 Mooring cover
 Cockpit cover
 Bow cover
 Clarion stereo CD M4275 with 4 speakers
 Clarion stereo CD M5275 remote ready w/4 speakers

Bimini top w/boot
 Deluxe U-shaped cockpit seating with filler cushions
 Bow filler cushions with table
 Stainless steel prop (Merc only)
 High altitude prop
 Automatic bilge pump
 Snap-in carpet

Engine Choices

5.0L MerCruiser
 5.0L EFI MerCruiser
 5.7L MerCruiser
 5.7L Bravo III MerCruiser
 5.7L EFI MerCruiser
 7.4L MPI Bravo I MerCruiser
 7.4L MPI Bravo III MerCruiser

5.0 GL Volvo Penta
 5.0 Gi Volvo Penta
 5.7 GS II Volvo Penta
 5.7 GS II DP Volvo Penta
 5.7 GSi II Volvo Penta
 7.4 Gi Volvo Penta
 7.4 Gi DP Volvo Penta

Color Choices

Cardinal Red/Beige Cypress Teal/Beige

Navy Blue/Beige

Rosewood/Beige

GS 225 Performance Data

Engine 5.7L MerCruiser — Prop 14 x 19 AL		GPH	RANGE*
RPM	MPH		
3000	28	8.9	163
3500	36	13.4	148
4000	43	16.4	110
WOT	47-49	—	—

0-20 MPH Acceleration — 3.7 sec.

Engine 7.4L MerCruiser — Prop 23 Mirage		GPH	RANGE*
RPM	MPH		
3000	32	10.5	154
3500	38	14.2	139
4000	44	20.5	108
WOT	56-59	—	—

0-20 MPH Acceleration — 3.3 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.
 *Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 23' 3 1/2" (7.09 m.)	Transom Width 98 1/2" (2.51 m.)
Beam 102" (2.59 m.)	Transom Deadrise 20°
Depth 64 1/2" (1.64 m.)	LOA on Trailer 26' 10" (8.18 m.)
Maximum Depth 77 1/2" (1.97 m.)	Fuel Capacity 56 gal (212 L.)
Cockpit Depth 37" (94 m.)	Maximum Load 2240 lbs. (1008 kg.)
Approx. Wt. w/5.7 GS II Volvo Penta 4002 lbs. (1801 kg.)	Max. Person 16 or 2240 lbs. (1008 kg.)
	NMMA Certified
Draft: A. Drive Unit Up 17" (42 m.)	
B. Drive Unit Down 35" (89 m.)	

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, volt-meter and engine temperature gauges; plus switches for bilge pump, blower, navigation/anchor lights, panel lights, interior lights and horn; hour meter and depth sounder

Electric horn

Clarion stereo cassette M3170 with 4 speakers

Lockable glove box

Ski locker

Ski tow ring

Stainless steel bow eye and stern eyes

6" cleats

Walk-thru curved full glass windshield

Wraparound bow seats

Bow filler cushions

Bilge pump and blower

Full fiberglass cockpit liner

Deluxe U-shaped cockpit seating with deluxe bucket seats and pull-out sunlounge

Cockpit table

Molded swim platform

Stainless steel telescopic 3-step boarding ladder

Bimini top w/concealed storage and boot

Gelcoat accent stripes

Merc/Volvo controls

Tilt steering

Port side cuddy compartment with vented window

Starboard side storage compartment w/ice box

Merc/Volvo prop

Premier Package: stainless steel rails, stainless steel grab handles, power antenna

Options

Canvas Package: bow cover, walk thru curtain, side curtains, aft curtain, clear forward connecting curtain

Camper Canvas Package: includes Canvas Package less aft curtain, plus aft camper top, aft camper side curtains, aft camper stern curtain

Mooring Cover

Cockpit Cover

Bow cover

High altitude prop

Porta-pottie

Snap-in carpet

Clarion stereo CD M4275 with 4 speakers

Clarion stereo CD M5275 remote ready w/4 speakers

Automatic bilge pump

Stainless steel prop (Merc. only)

Engine Choices

5.0L MerCruiser	5.0 GL Volvo Penta
5.0L EFI MerCruiser	5.0 Gi Volvo Penta
5.7L MerCruiser	5.7 GS II Volvo Penta
5.7L Bravo III MerCruiser	5.7 GS II DP Volvo Penta
5.7 EFI MerCruiser	5.7 GS II Volvo Penta
7.4L MPI Bravo I MerCruiser	7.4 Gi Volvo Penta
7.4L MPI Bravo III MerCruiser	7.4 Gi DP Volvo Penta

Color Choices

Cardinal Red/White Cypress Teal/White Navy Blue/White Rosewood/White

GS 235 Performance Data

Engine 5.7L MerCruiser — Prop 14 x 19 AL			
RPM	MPH	GPH	RANGE*
2500	15	7.5	101
3300	25	10.9	115
4700	35	13.5	130
WOT	44-46	—	—

0-20 MPH Acceleration — 3.7 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

GS 160SF

Specifications

LOA 15' 11 1/2" (4.86 m.)
 Beam 84" (2.13 m.)
 Depth 37" (.94 m.)
 Maximum Depth 42" (1.07 m.)
 Cockpit Depth 24" (.61 m.)
 Approx. Wt. 1050 lbs. (473 kg.)
 Transom Width 82" (2.08 m.)
 Draft: A. Drive Unit Up 15 1/2" (.39 m.)
 B. Drive Unit Down 28 1/2" (.72 m.)

Transom Deadrise 13°
 LOA on Trailer 20' 10" (6.35 m.)
 Fuel Capacity 16 gal. (60.6 L.)
 Maximum Load 1292 lbs. (581 kg.)
 Max. Person 5 or 725 lbs. (326 kg.)
 Maximum Horsepower 120
 NMMA Certified

Standard Features

Instrument panel includes: speedometer, tachometer, fuel and trim gauges; plus switches for bilge pump, navigation/anchor lights, panel lights, horn, and accessories

Bow panel includes: aerator switch and trolling motor plug

Electric horn

Bilge pump

Navigation lighting

AM/FM stereo cassette with 2 speakers

Glove box

2 removable fishing seats/aft bench seating

Stainless steel bow eye and stern eyes

4" cleats

Skiff windshield

Wraparound bow seats

Tackle box trays

Aerated livewell

Bow storage compartments

Passenger grab handle

Ski/kneeboard locker

Molded swim platform

Stainless steel boarding ladder

Bow converts to fishing deck

Options

Mooring cover

Dual cable steering

Clarion stereo M3T70 with 2 speakers

Clarion stereo CD M4275 with 2 speakers

Ski tow pylon

Automatic bilge pump

Soft top with boot

Fishing Package: fish finder, trolling motor and mount, battery trays

Engine Choices

OMC Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom, OMC systems check

Mercury Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom

75 hp Mercury or Mariner*

90 hp Mercury or Mariner*

115 hp Mercury or Mariner*

50 hp Force*

75 hp Force*

90 hp Force*

120 hp Force*

**Engine will be shipped from Mercury Marine; boat will be pre-rigged with Mercury/Mariner or Force parts*

Color Choices

Cardinal Red/White Cypress Teal/White Navy Blue/White

GS 160SF Performance Data

Engine 90 Evinrude — Prop 13 1/4 x 17		GPH	RANGE*
RPM	MPH		
2500	15	2.5	86
3400	25	4.0	90
4600	35	6.0	84
WOT	42-44	—	—

0-20 MPH Acceleration — 3.7 sec.

Engine 115 Evinrude — Prop 12 3/4 x 21		GPH	RANGE*
RPM	MPH		
2500	15	3.4	63
3300	25	4.3	84
4700	35	7.0	72
WOT	46-48	—	—

0-20 MPH Acceleration — 3.5 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.
 *Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 17' 10 1/2" (5.49 m.)
 Beam 89 3/4" (2.28 m.)
 Depth 43" (1.09 m.)
 Maximum Depth 53" (1.35 m.)
 Cockpit Depth 28 1/2" (.72 m.)
 Approx. Wt. 1425 lbs. (641 kg.)
 Transom Width 84 1/2" (2.15 m.)
 Transom Deadrise 20°
 LOA on Trailer 22' (6.71 m.)
 Fuel Capacity 20 gal (75.7 L.)
 Maximum Load 1900 lbs. (855 kg.)
 Max. Person 8 or 1150 lbs. (518 kg.)
 Maximum Horsepower 150
 NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.)
 B. Drive Unit Down 29" (.74 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, fuel and trim gauges; plus switches for bilge pump, navigation/anchor lights, panel lights, horn, and accessories
 Bow panel includes: aerator switch, voltmeter, tilt switch, battery charger switch, battery selector switch, trolling motor plug
 Electric horn
 Navigation lighting
 AM/FM stereo cassette with 2 speakers
 Glove box
 Ski/kneeboard locker
 6" cleats
 Stainless steel bow eye and stern eyes
 Walk-thru curved open glass windshield
 Bilge pump and blower
 Courtesy lights

Wraparound bow seats
 Bow converts to fishing deck
 2 adjustable bucket seats/2 removable fishing seats/aft bench seating
 Anchor locker
 Passenger grab handle
 Molded swim platform
 Stainless steel boarding ladder
 Sunbrella soft top and boot with concealed storage
 Gelcoat accent stripes
 Aerated livewell
 Molded trolling motor mount
 Trolling motor battery trays
 Rod holders
 Tackle box trays
 Dual cable steering
 Removable ice chest

Options

Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain
 Mooring cover
 Cockpit cover
 Bow cover
 Fishing Package: trolling motor, fish finder
 Ski tow pylon

Convenience Package: hour meter, depth sounder
 Power antenna (Clarion stereos only)
 Tilt steering
 Clarion stereo cassette M3170 w/4 speakers
 Clarion stereo CD M4275 with 4 speakers
 Telescopic 3-step boarding ladder
 Automatic bilge pump

Engine Choices

OMC Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom, OMC systems check
 Mercury Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom
 115 hp Mercury or Mariner*
 135 hp Mercury or Mariner*
 150 hp Mercury or Mariner*
 120 hp Force*
**(Engine will be shipped from Mercury Marine; boat will be pre-rigged with Mercury/Mariner or Force parts)*

Color Choices

Cardinal Red/Beige Cypress Teal/Beige Navy Blue/Beige Rosewood/Beige

GS 180SF Performance Data

Engine 90 Evinrude — Prop 13 1/2 x 17

RPM	MPH	GPH	RANGE*
2500	15	2.9	88
3400	25	4.2	102
4600	35	6.3	95
WOT	38-40	—	—

0-20 MPH Acceleration — 3.3 sec.

Engine 115 Evinrude — Prop 12 1/2 x 21

RPM	MPH	GPH	RANGE*
2500	15	3.6	71
3300	25	4.6	92
4700	35	7.2	83
WOT	42-44	—	—

0-20 MPH Acceleration — 3.2 sec.

Engine 135 Mercury (V6) — Prop 13 1/2 x 21 S/S Laser

RPM	MPH	GPH	RANGE*
2400	15	4.2	64
3000	25	5.1	88
4000	35	7.1	86
WOT	46-49	—	—

0-20 MPH Acceleration — 3.1 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.
 *Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

GS 185SF

Specifications

LOA 18' (5.49 m.)
 Beam 89 1/4" (2.28 m.)
 Depth 43" (1.09 m.)
 Maximum Depth 53" (1.35 m.)
 Cockpit Depth 28 1/4" (72 m.)
 Approx. Wt. w/4.3 GL Volvo Penta
 2232 lbs. (1004 kg.)
 Draft: A. Drive Unit Up 16 1/2" (42 m.)
 B. Drive Unit Down 31 1/2" (8 m.)

Transom Width 84 1/2" (2.15 m.)
 Transom Deadrise 20°
 LOA on Trailer 21' 6" (6.55 m.)
 Fuel Capacity 20 gal. (75.7 L.)
 Maximum Load 1150 lbs. (518 kg.)
 Max. Person 8 or 1150 lbs (518 kg.)
 NMMA Certified

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, volt-meter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights and accessories
 Bow panel includes: aerator switch, volt-meter, tilt switch, battery charger switch, battery selector switch, trolling motor plug
 Electric horn
 Navigation lighting
 AM/FM stereo cassette with 2 speakers
 Glove box
 Ski/kneeboard locker
 Ski tow ring
 Stainless steel bow eye and stern eyes
 6" cleats
 Walk-thru curved open glass windshield
 Bilge pump and blower
 Courtesy lights

Wraparound bow seats
 Bow converts to fishing deck
 2 adjustable bucket seats/2 removable fishing seats/aft bench seating
 Anchor locker
 Passenger grab handle
 Molded swim platform
 Stainless steel boarding ladder
 Convertible stern sundeck/fishing platform
 Sunbrella soft top & boot with concealed storage
 Gelcoat accent stripes
 Aerated livewell
 Molded trolling motor mount
 Trolling motor battery trays
 Rod holders
 Tackle box trays
 Merc/Volvo prop
 Removable ice chest

Options

Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain
 Mooring cover
 Bow cover
 Fishing Package: trolling motor, fish finder
 Telescopic 3-step boarding ladder
 Stainless steel prop (Merc. only)
 High altitude prop

Convenience Package: hour meter, depth sounder
 Tilt steering
 Power antenna (Clarion stereos only)
 Clarion stereo cassette M3170 with 4 speakers
 Clarion stereo CD M4275 with 4 speakers
 Automatic bilge pump

Engine Choices

3.0L MerCruiser (WOPS)
 3.0L MerCruiser (WPS)
 4.3L MerCruiser

3.0 GS Volvo Penta (WOPS)
 3.0 GS Volvo Penta (WPS)
 4.3 GL Volvo Penta

Color Choices

Cardinal Red/Beige Cypress Teal/Beige Navy Blue/Beige Rosewood/Beige

GS 185SF Performance Data

Engine 3.0L MerCruiser — Prop 13 1/2 x 21 AL

RPM	MPH	GPH	RANGE*
2100	15	2.5	102
2900	25	3.5	121
3500	35	7.4	85
WOT	42-45	—	—

0-20 MPH Acceleration — 3.4 sec.

Engine 3.0 GS Volvo Penta — Prop 15 x 17 AL

RPM	MPH	GPH	RANGE*
2000	10	2.1	81
3000	20	3.2	106
4000	35	7.6	82
WOT	41-43	—	—

0-20 MPH Acceleration — 3.7 sec.

Engine 4.3 GL Volvo Penta — Prop 14 x 19 AL

RPM	MPH	GPH	RANGE*
2200	15	3.0	90
2900	25	4.0	113
3400	35	7.9	80
WOT	47-49	—	—

0-20 MPH Acceleration — 3.2 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.
 *Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 19' 11" (6.07 m.)
 Beam 93 1/2" (2.37 m.)
 Depth 45 1/2" (1.16 m.)
 Maximum Depth 56 1/2" (1.4 m.)
 Cockpit Depth 31 1/2" (.81 m.)
 Approx. Wt. w/5.7 GS II Volvo Penta
 2499 lbs. (1125 kg.)
 Draft: A. Drive Unit Up 16 1/2" (.42 m.)
 B. Drive Unit Down 31 1/2" (.8 m.)

Transom Width 88 1/2" (2.25 m.)
 Transom Deadrise 20°
 LOA on Trailer 24' 8" (7.52 m.)
 Fuel Capacity 34 gal. (128.69 L)
 Maximum Load 1450 lbs. (653 kg.)
 Max. Person 10 or 1450 lbs. (653 kg.)
 NMMA Certified

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, volt-meter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights and accessories
 Bow panel includes: aerator switch, volt-meter, tilt switch, battery charger switch, battery selector switch, trolling motor plug
 Electric horn
 Navigation lighting
 AM/FM stereo cassette with 2 speakers
 Glove box
 Ski/kneeboard locker
 Ski tow ring
 Stainless steel bow eyes and stern eyes
 6" cleats
 Walk-thru curved open glass windshield
 Bilge pump and blower

Removable ice chest
 Wraparound bow seats
 Bow converts to fishing deck
 2 adjustable bucket seats/2 removable fishing seats/aft bench seating
 Anchor locker
 Passenger grab handle
 Molded swim platform
 Stainless steel boarding ladder
 Convertible stern sundeck/fishing platform
 Sunbrella soft top & boot with concealed storage
 Aerated livewell
 Molded trolling motor mount
 Trolling motor battery trays
 Rod holders
 Tackle box trays
 Merc/Volvo prop
 Courtesy lights

Options

Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain
 Automatic bilge pump
 Mooring cover
 Cockpit cover
 Bow cover
 Clarion stereo cassette M3170 with 4 speakers
 Clarion stereo CD M4275 with 4 speakers

Fishing Package: trolling motor, fish finder
 High altitude prop
 Power antenna (Clarion stereos only)
 Stainless steel prop (Merc. only)
 Convenience Package: hour meter, depth sounder
 Tilt steering
 Telescopic 3-step boarding ladder

Engine Choices

4.3L MerCruiser
 4.3L Bravo III MerCruiser
 5.0L MerCruiser
 5.0L EFI MerCruiser
 5.7L MerCruiser
 5.7L Bravo III MerCruiser
 5.7L EFI MerCruiser
 4.3 GL Volvo Penta
 4.3 GL DP Volvo Penta
 5.0 GL Volvo Penta
 5.0 Gi Volvo Penta
 5.7 GS II Volvo Penta
 5.7 GS II DP Volvo Penta
 5.7 GSi II Volvo Penta

Color Choices

Cardinal Red/Beige Cypress Teal/Beige Navy Blue/Beige Rosewood/Beige

GS 205SF Performance Data

Engine 4.3L MerCruiser — Prop 13 1/2 x 21 AL

RPM	MPH	GPH	RANGE*
2400	15	3.0	160
3200	25	4.0	202
3700	35	7.9	141
WOT	46-48	—	—

0-20 MPH Acceleration — 3.3 sec.

Engine 4.3 GL Volvo Penta — Prop 14 x 19 AL

RPM	MPH	GPH	RANGE*
2000	15	2.8	161
3000	25	3.8	197
4000	35	6.9	152
WOT	45-47	—	—

0-20 MPH Acceleration — 3.4 sec.

Engine 5.7L MerCruiser — Prop 14 x 19 AL

RPM	MPH	GPH	RANGE*
2200	15	3.3	144
2800	25	4.3	186
3500	35	8.0	141
WOT	54-56	—	—

0-20 MPH Acceleration — 3.1 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 20' 1 1/2" (6.13 m.)	Transom Deadrise 19°
Beam 94 1/4" (2.39 m.)	LOA on Trailer 24' 8"
Depth 50" (1.27 m.)	Fuel Capacity 45 gal. (170.33 L)
Maximum Depth 71" (1.80 m.)	Maximum Load 1450 lbs (655 kg.)
Cockpit Depth 35 1/2" (.90 m.)	Max. Person 8 or 1150 lbs. (518 kg.)
Approx. Wt. w/S.7 GS II Volvo Penta	Maximum Horsepower
2852 lbs. (1283 kg.)	NMMA Certified
Transom Width 90" (2.29 m.)	
Draft: A. Drive Unit Up 18 1/2" (.47 m.)	
B. Drive Unit Down 33" (.84 m.)	

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights and accessories	6" cleats
Electric horn	Walk-thru curved full glass windshield
Automatic bilge pump	Bow access step
Blower	Bow anchor locker
Navigation lighting	Passenger grab handle
AM/FM stereo cassette with 2 speakers	Molded swim platform
Floor storage area	Stainless steel boarding ladder
Ski tow ring	Sunbrella soft top and boot with concealed storage
Stainless steel bow eye and stern eyes	Gelcoat accent stripes
Tilt steering	Merc/Volvo prop
Lockable cabin doors	BS Seating: starboard bucket/port sleeper/aft jump seats
	Stainless steel bow and stern rails
	Helm storage locker

Options

Canvas Package: side curtains, stern curtain	Galley Package: sink, stove, water system, ice box w/dual helm seat & aft jump seats
Mooring cover	SL Seating: 2 bucket seats/aft bench/sunlounge (Galley Package not available in this seating option)
Cockpit cover	Stainless steel prop (Merc only)
Clarion stereo cassette M3170 w/2 speakers	Telescopic stern light
Clarion stereo CD M4275 with 2 speakers	Telescopic 3-step boarding ladder
Porta-pottie	High altitude prop
Bow pad	Convenience Package: hour meter, depth sounder
Camper Canvas Package: includes Canvas Package less stern curtain, plus aft camper top, aft camper side curtains, aft camper stern curtains	

Engine Choices

4.3L MerCruiser	4.3 GL Volvo Penta
4.3L Bravo III MerCruiser	4.3 GL DP Volvo Penta
5.0L MerCruiser	5.0 GL Volvo Penta
5.0L EFI MerCruiser	5.0 Gi Volvo Penta
5.7L MerCruiser	5.7 GS II Volvo Penta
5.7L Bravo III MerCruiser	5.7 GS II DP Volvo Penta
5.7L EFI MerCruiser	5.7 GSi II Volvo Penta

Color Choices

Cardinal Red/White Cypress Teal/White Navy Blue/White Rosewood/White

GS 209 Performance Data

Engine 4.3L MerCruiser — Prop 13 1/4 x 21 AL

RPM	MPH	GPH	RANGE*
2400	15	3.0	160
3200	25	4.0	202
3700	35	7.9	141
WOT	44-46	—	—

0-20 MPH Acceleration — 3.5 sec.

Engine 4.3 GL Volvo Penta — Prop 14 x 19 AL

RPM	MPH	GPH	RANGE*
2000	15	2.8	161
3000	25	3.8	197
4000	35	6.9	152
WOT	43-45	—	—

0-20 MPH Acceleration — 3.6 sec.

Engine 5.7L MerCruiser — Prop 14 x 19 AL

RPM	MPH	GPH	RANGE*
2200	15	3.3	144
2800	25	4.3	186
3500	35	8.0	141
WOT	51-53	—	—

0-20 MPH Acceleration — 3.3 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 22' 7" (6.92 m.)
 Beam 96" (2.43 m.)
 Depth 64" (1.63 m.)
 Maximum Depth 75" (1.91 m.)
 Cockpit Depth 36" (.91 m.)
 Approx. Wt. w/5.7 GL II Volvo Penta 3350 lbs. (1519 kg.)
 Draft: A. Drive Unit Up 18" (.46 m.)
 B. Drive Unit Down 36" (.91 m.)

Transom Width 93" (2.36 m.)
 Transom Deadrise 22°
 LOA on Trailer 26' 4" (8.03 m.)
 Fuel Capacity 47 gal. (177.9 L.)
 Maximum Load 1950 lbs. (878 kg.)
 Max. Persons 12 or 1950 lbs. (878 kg.)
 NMMA Certified

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, volt-meter and engine temperature gauges; plus switches for bilge pump, blower, lights and horn; hour meter and depth sounder

Horn
 Automatic bilge pump
 Blower
 Clarion stereo M3170 cassette with 4 speakers
 Welded stainless bow rails
 Stainless steel bow eye and stern eyes
 6" cleats
 Ski tow ring
 Bow anchor locker
 Twin cabin lounge seats

Lockable sliding cabin door
 Walk-thru curved full glass windshield
 BS Seating: starboard bucket/port sleeper/aft bench seat
 Porta-pottie
 Molded swim platform
 Stainless steel telescopic 3-step boarding ladder
 Sunbrella bimini top and boot
 Gelcoat accent stripes
 Merc/Volvo controls
 Merc/Volvo prop
 Tilt steering
 Floor storage area
 Deck hatch with screen
 Removable ice chest
 Full fiberglass cockpit liner

Options

Galley Package: stainless steel sink, 5-gal. water system, alcohol stove
 Canvas Package: side curtains, stern curtains, forward clear connector curtain
 Cockpit cover
 Mooring cover
 Dual battery switch and trays
 Camper Canvas Package: includes Canvas Package less stern curtain, plus aft camper top, aft camper side curtains, aft camper stern curtain
 Snap-in carpet

Starboard windshield wiper
 Vented cabin windows
 Compass
 SL Seating: 2 bucket seats/aft bench/convertible sunlounge
 High altitude prop
 Stainless steel prop (Merc only)
 Telescopic stern light
 Clarion stereo CD M4275 with 4 speakers
 Clarion stereo CD M5275 remote ready with 4 speakers

Engine Choices

5.0L MerCruiser
 5.0L EFI MerCruiser
 5.7L MerCruiser
 5.7L Bravo III MerCruiser
 5.7L EFI MerCruiser
 7.4L MPI Bravo I MerCruiser
 7.4L MPI Bravo III MerCruiser

5.0 GL Volvo Penta
 5.0 Gi Volvo Penta
 5.7 GS II Volvo Penta
 5.7 GS II DP Volvo Penta
 5.7 GSi II Volvo Penta
 7.4 Gi Volvo Penta
 7.4 Gi DP Volvo Penta

Color Choices

Cardinal Red/White Cypress Teal/White Navy Blue/White Rosewood/White

GS 229 Performance Data

Engine 5.7L MerCruiser — Prop 14 x 19 AL			
RPM	MPH	GPH	RANGE*
3000	28	8.9	163
3500	36	13.4	148
4000	43	16.4	110
WOT	47-49	—	—

0-20 MPH Acceleration — 3.7 sec.

Engine 7.4L MerCruiser — Prop 23 Mirage			
RPM	MPH	GPH	RANGE*
3000	32	10.5	154
3500	38	14.2	139
4000	44	20.5	108
WOT	56-59	—	—

0-20 MPH Acceleration — 3.3 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

GS 249

Specifications

LOA 24' 10" (7.57 m.)
 Beam 102" (2.59 m.)
 Depth 80 1/2" (2.04 m.)
 Maximum Depth 91" (2.31 m.)
 Cockpit Depth 35" (.89 m.)
 Approx. Wt. w/5.7 GS II Volvo Penta
 4437 lbs. (1997 kg.)
 Draft: A. Drive Unit Up 17" (.42 m.)
 B. Drive Unit Down 35" (.89 m.)

Transom Width 98 1/2" (2.50 m.)
 Transom Deadrise 20°
 LOA on Trailer 26' 10" (8.18 m.)
 Fuel Capacity 56 gal. (211.7 L.)
 Maximum Load 2240 lbs/(1008 kg.)
 Max. Persons 16 or 2240 lbs. (1008 kg.)
 NMMA Certified

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, volt-meter and engine temperature gauges; plus switches for bilge pump, blower, navigation/anchor lights, panel lights, interior lights and horn; hour meter and depth sounder
 Horn/blower/compass
 Automatic bilge pump
 Translucent deck hatch w/screen
 Clarion stereo M3170 cassette w/4 speakers
 Welded stainless steel rails
 Bow pulpit with roller and bow rope locker
 Stainless steel bow eye and stern eyes
 Stainless steel cleats
 Complete walkaround deck
 Walk-thru curved full glass windshield
 Tilt steering

18-gallon water tank
 Main cabin includes: enclosed head with 4-gallon porta-pottie, fiberglass shower stall, hanging clothes locker, cabin table, cabin courtesy lights, ice box, alcohol stove, and on-demand water faucet
 Molded swim platform/stainless steel telescopic 3-step boarding ladder
 Sunbrella bimini top
 Gelcoat accent stripes
 Merc/Volvo controls
 Merc/Volvo prop
 Cockpit area includes: deluxe captain's chair, L-shaped passenger seating with double-wide fold out sunlounge, stern storage compartment and walk-thru transom with gate
 Vented cabin windows

Options

Cockpit cover
 Camper Canvas Package includes: Canvas Package less stern curtain, plus aft camper top, aft camper side curtains, aft camper stern curtains
 Canvas Package for bimini top: side curtains, aft curtains, clear connector
 Snap-in carpet
 Dual battery switch and trays
 Manual china head with pump-out
 Hydraulic trim tabs

Transom shower
 Starboard windshield wiper
 High altitude prop
 Stainless steel prop (Merc only)
 Clarion stereo CD M4275 w/4 speakers
 Clarion stereo CD MS275 remote ready w/4 speakers
 Galley Package: microwave oven, 12V/110 refrigerator, alcohol/electric stove, hot water heater, 110 dockside power

Engine Choices

5.0L MerCruiser
 5.0L EFI MerCruiser
 5.7L MerCruiser
 5.7L Bravo III MerCruiser
 5.7L EFI MerCruiser
 7.4L MPI Bravo I MerCruiser
 7.4L MPI Bravo III MerCruiser

5.0 GL Volvo Penta
 5.0 Gi Volvo Penta
 5.7 GS II Volvo Penta
 5.7 GS II DP Volvo Penta
 5.7 GSI II Volvo Penta
 7.4 Gi Volvo Penta
 7.4 Gi DP Volvo Penta

Color Choices

Cardinal Red/White
 Cypress Teal/White

Navy Blue/White
 Rosewood/White

GS 249 Performance Data

Engine 5.7 GL Volvo Penta — Prop 15 x 17 AL			
RPM	MPH	GPH	RANGE*
2500	15	7.4	102
3400	25	10.7	118
4600	35	13.2	133
WOT	38-41	—	—

0-20 MPH Acceleration — 3.6 sec.

Engine 5.7L MerCruiser— Prop 23 Mirage			
RPM	MPH	GPH	RANGE*
2500	15	10.5	72
3300	25	13.5	93
4200	35	18.5	95
WOT	46-49	—	—

0-20 MPH Acceleration — 2.9 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T,T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 21' 3" (6.49 m.)	Transom Width 94" (2.39 m.)
Beam 100" (2.54 m.)	Hull Deadrise 24°
Depth 54" (1.37 m.)	LOA on Trailer 26'8"
Maximum Depth 60" (1.53 m.)	Fuel Capacity 60 gal. (227.3 L)
Cockpit Depth 35" (.89 m.)	Maximum Load 1875 lbs. (844 kg.)
Approx. Wt. 3550 lbs. (1608 kg.)	Max. Persons 11 or 1551 lbs. (698 kg.)
Draft: A. Drive Unit Up 17" (.43 m.)	
B. Drive Unit Down 38" (.96 m.)	

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, volt-meter and engine temperature gauges; plus switches for bilge pump, blower, lights and horn; hour meter and depth sounder	Full fiberglass cockpit liner
Horn	Acrylic windscreen
Automatic bilge pump	Bolstered buckets with flip-up seat/aft bench seating
Blower	Telescopic stern light
Clarion stereo M3170 cassette w/4 speakers	Molded swim platform
Stainless steel bow eye and stern eyes	Stainless steel telescopic 3-step boarding ladder
6" stainless steel cleats	Gelcoat accent stripes
Ski tow ring	Dual lever throttle/shift
Padded sunlounge w/electric hatch lifts	Tilt steering
	Stainless steel intake vents
	Power antenna
	Imron flame graphics

Options

Corsa Quick & Quiet II thru-transom exhaust	Soft top w/boot-Sunbrella (full glass windshield only)
Corsa Captain's Call exhaust diverter (electric)	Fire extinguisher system
Compass	Color-matched snap-in carpet
Stainless steel pop-up cleats	Full glass windshield (delete windscreen)
Mooring cover	Clarion stereo CD M4275 with 4 speakers
Sunbrella bimini top and boot	Clarion stereo CD M5275 remote ready with 4 speakers
Sunbrella cockpit cover	Bow filler cushion with table

Engine Choices

5.0L EFI MerCruiser (Alpha)	5.0 Gi Volvo Penta
5.7L MerCruiser (Alpha)	5.7 GS Volvo Penta
5.7L EFI MerCruiser (Alpha)	5.7 GSi Volvo Penta
350 Magnum MPI MerCruiser (Bravo I)	7.4 Gi Volvo Penta
7.4L MPI MerCruiser (Bravo I)	7.4 GSi DP Volvo Penta
454 Magnum MPI MerCruiser (Bravo I)	

Color Choices

White with Blue/Magenta Imron Flame Graphics
 White with Plum/Magenta Imron Flame Graphics
 White with Red/Black Imron Flame Graphics
 White with Teal/Magenta Imron Flame Graphics

CSX 21 Performance Data

Performance data on the CSX 21 is not available at this time. Information will be sent at a later date.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 23' 3" (7.09 m.)	Transom Width 96" (2.44 m.)
Beam 102" (2.59 m.)	Hull Deadrise 24°
Depth 55½" (1.41 m.)	LOA on Trailer 28' 8"
Maximum Depth 60" (1.53 m.)	Fuel Capacity 60 gal. (227.3 L)
Cockpit Depth 35" (.89 m.)	Maximum Load 2150 lbs. (967.5 kg.)
Approx. Wt. 3835 lbs. (1737 kg.)	Max. Persons 12 or 1950 lbs. (878 kg.)
Draft: A. Drive Unit Up 17" (.43 m.)	
B. Drive Unit Down 38" (.96 m.)	

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, volt-meter and engine temperature gauges; plus switches for bilge pump, blower, lights and horn; hour meter and depth sounder	Acrylic windscreen
Horn	Bolstered buckets with flip-up seat rest/aft bench seating
Automatic bilge pump	Porta-pottie
Blower	Molded swim platform
Clarion stereo M3170 cassette w/4 speakers	Stainless steel telescopic 3-step boarding ladder
Stainless steel bow eye and stern eyes	Gelcoat accent stripes
6" stainless steel cleats	Dual lever throttle/shift
Ski tow ring	Tilt steering
Upholstered V-berth with lounge seat	Plexiglass deck hatch with screen
Padded sunlounge w/electric hatch lifts	Stainless steel intake vents
Full fiberglass cockpit liner	Power antenna
	Telescopic stern light
	Imron flame graphics

Options

Corsa Quick & Quiet II thru-transom exhaust	Soft top w/boot - Sunbrella (full glass windshield only)
Corsa Captain's Call exhaust diverter (electric)	Fire extinguisher system
Compass	Color-matched snap-in carpet
Stainless steel pop-up cleats	Full glass windshield (delete windscreen)
Mooring cover	Clarion stereo CD M4275 with 4 speakers
Sunbrella bimini top and boot	Clarion stereo CD M5275 remote ready with 4 speakers
Sunbrella cockpit cover	

Engine Choices

5.7L MerCruiser (Alpha)	5.7 GS Volvo Penta
5.7L EFI MerCruiser (Alpha)	5.7 GSI Volvo Penta
350 Magnum MPI MerCruiser (Bravo I)	7.4 Gi Volvo Penta
7.4L MPI MerCruiser (Bravo I)	7.4 GSi DP Volvo Penta
454 Magnum MPI MerCruiser (Bravo I)	8.2 GSi DP Volvo Penta
502 Magnum MPI MerCruiser (Bravo I)	

Color Choices

White with Blue/Magenta Imron Flame Graphics
 White with Plum/Magenta Imron Flame Graphics
 White with Red/Black Imron Flame Graphics
 White with Teal/Magenta Imron Flame Graphics

CSX 23 Performance Data

Performance data on the CSX 23 is not available at this time.
 Information will be sent at a later date.

Sale Price

Boat	\$ _____
Motor _____ H.P.	_____
Trailer	_____
Accessories	_____
T, T & L	_____
TOTAL PRICE \$	_____

Sterndrive Engine Information

The following pages contain data about sterndrives offered in our 1998 product.

MODEL:	3.0L MERCUISER
Horsepower at Prop Shaft	135 hp/101 kw.
Cylinders	4
Cubic Inches	181
Compression Ratio	9.3:1
Max. Recommended RPM	4400-4800
Lower Unit Gear Ratio	2.0:1
Tilt	Power
Trim	Power
Length	34"
Width	23"
Height	20" (above crankshaft at CL)
Weight	635 lbs. (pkg. weight)

MODEL:	4.3L MERCUISER
Horsepower at Prop Shaft	190 hp/141 kw.
Cylinders	6
Cubic Inches	262
Compression Ratio	9.4:1
Max. Recommended RPM	4400-4800
Lower Unit Gear Ratio	1.84:1
Tilt	Power
Trim	Power
Length	33"
Width	30"
Height	21" (above crankshaft at CL)
Weight	840 lbs. (pkg. weight)

MODEL:	4.3L BRAVO III MERCUISER
Horsepower at Prop Shaft	190 hp/141 kw.
Cylinders	6
Cubic Inches	262
Compression Ratio	9.4:1
Max. Recommended RPM	4400-4800
Lower Unit Gear Ratio	2.43:1
Tilt	Power
Trim	Power
Length	33"
Width	30"
Height	21" (above crankshaft at CL)
Weight	894 lbs. (pkg. weight)

MODEL:	5.7L MERCUISER
Horsepower at Prop Shaft	250 hp/185 kw.
Cylinders	8
Cubic Inches	350
Compression Ratio	9.4:1
Max. Recommended RPM	4400-4800
Lower Unit Gear Ratio	1.47:1
Tilt	Power
Trim	Power
Length	37"
Width	29"
Height	22" (above crankshaft at CL)
Weight	938 lbs. (pkg. weight)

MODEL:	5.7L BRAVO III MERCUISER
Horsepower at Prop Shaft	250 hp/185 kw.
Cylinders	8
Cubic Inches	350
Compression Ratio	9.4:1
Max. Recommended RPM	4400-4800
Lower Unit Gear Ratio	2.2:1
Tilt	Power
Trim	Power
Length	37"
Width	29"
Height	22" (above crankshaft at CL)
Weight	994 lbs. (pkg. weight)

MODEL:	5.7L EFI MERCUISER
Horsepower at Prop Shaft	260 hp/192 kw.
Cylinders	8
Cubic Inches	350
Compression Ratio	9.4:1
Max. Recommended RPM	4400-4800
Lower Unit Gear Ratio	1.47:1
Tilt	Power
Trim	Power
Length	37"
Width	29"
Height	22" (above crankshaft at CL)
Weight	938 lbs. (pkg. weight)

MODEL:	7.4L MPI BRAVO I MERCUISER
Horsepower at Prop Shaft	310 hp/229 kw.
Cylinders	8
Cubic Inches	454
Compression Ratio	8.0:1
Max. Recommended RPM	4200-4600
Lower Unit Gear Ratio	1.50:1
Tilt	Power
Trim	Power
Length	39"
Width	32"
Height	24" (above crankshaft at CL)
Weight	1,158 lbs. (pkg. weight)

MODEL:	7.4L MPI BRAVO III MERCUISER
Horsepower at Prop Shaft	310 hp/229 kw.
Cylinders	8
Cubic Inches	454
Compression Ratio	8.0:1
Max. Recommended RPM	4200-4600
Lower Unit Gear Ratio	2.0:1
Tilt	Power
Trim	Power
Length	39"
Width	32"
Height	24" (above crankshaft at CL)
Weight	1,179 lbs. (pkg. weight)

MODEL:	350 MAGNUM MPI MERCUISER
Horsepower at Prop Shaft	300 hp/222 kw.
Cylinders	8
Cubic Inches	350
Compression Ratio	9.4:1
Max. Recommended RPM	4600-5000
Lower Unit Gear Ratio	1.47:1
Tilt	Power
Trim	Power
Length	37"
Width	30"
Height	22" (above crankshaft at CL)
Weight	952 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

454 MAGNUM MPI MERCUISER

385 hp/285 kw.
8
454
8.6:1
4600-5000
1.50:1
Power
Power
39"
32"
22" (above crankshaft at CL)
1,177 lbs. (pkg. weight)

502 MAGNUM MPI MERCUISER

415 hp/307 kw.
8
502
8.75:1
4600-5000
1.5:1
Power
Power
39"
32"
22" (above crankshaft at CL)
1,189 lbs. (pkg. weight)

3.0 GS VOLVO PENTA

135 hp/100 kw.
4
181
9.2:1
4600
1.97:1
Power
Power
34"
24"
19" (above crankshaft at CL)
665 lbs. (pkg. weight)

4.3 GL VOLVO PENTA

190 hp/141 kw.
6
262
9.4:1
4600
1.89:1
Power
Power
31 1/2"
31"
20" (above crankshaft at CL)
880 lbs. (pkg. weight)

5.0 GL VOLVO PENTA

220 hp/163 kw.
8
302
9.4:1
4800
1.66:1
Power
Power
36 1/2"
28 1/2"
21" (above crankshaft at CL)
979 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.0 GI VOLVO PENTA

250 hp/185 kw.
8
302
9.4:1
4800
1.66:1
Power
Power
36 1/2"
28 1/2"
21" (above crankshaft at CL)
979 lbs. (pkg. weight)

5.7 GS II VOLVO PENTA

250 hp/185 kw.
8
350
9.1:1
4800
1.51:1
Power
Power
36 1/2"
28 1/2"
21" (above crankshaft at CL)
979 lbs. (pkg. weight)

5.7 GS II DP VOLVO PENTA

250 hp/186 kw.
8
350
9.1:1
4800
1.95:1
Power
Power
36 1/2"
28 1/2"
21" (above crankshaft at CL)
990 lbs. (pkg. weight)

5.7 GSI II VOLVO PENTA

280 hp/207 kw.
8
350
9.4:1
5000
1.43:1
Power
Power
36 1/2"
28 1/2"
22" (above crankshaft at CL)
991 lbs. (pkg. weight)

7.4 GI VOLVO PENTA

310 hp/229 kw.
8
454
8.0:1
4600
1.43:1
Power
Power
38 1/2"
31 1/2"
22 1/2" (above crankshaft at CL)
1,193 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

7.4 Gi DP VOLVO PENTA

310 hp/229 kw.
8
454
8.0:1
4600
1.95:1
Power
Power
38½"
31½"
22½" (above crankshaft at CL)
1,204 lbs. (pkg. weight)

7.4 GSI DP VOLVO PENTA

385 hp/222 kw.
8
454
8.6:1
5200
1.78:1
Power
Power
38½"
31½"
22½" (above crankshaft at CL)
1,208 lbs. (pkg. weight)

8.2 GSI DP VOLVO PENTA

415 hp/307 kw.
8
502
8.8:1
5000
1.78:1
Power
Power
38½"
31½"
22½" (above crankshaft at CL)
1,208 lbs. (pkg. weight)


TAMD 22 VOLVO PENTA (DIESEL)

98 hp/73 kw.
4
122
17.5:1
4500
2.18:1
Power
Power
31½"
28½"
18" (above crankshaft at CL)
742 lbs. (pkg. weight)


AD 31 DP VOLVO PENTA (DIESEL)

139 hp/103 kw.
4
146
17.5:1
4000
2.30:1
Power
Power
37½"
29½"
19½" (above crankshaft at CL)
970 lbs. (pkg. weight)


Canvas Choices




Soft Top




Bimini Top




Canvas Package



Camper Canvas Package




Cockpit Cover




Mooring Cover

Bow Cover


Seating Choices

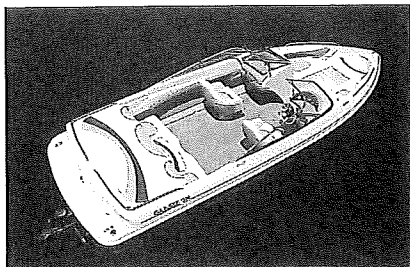


Bucket/Sunlounge Seating (SL)

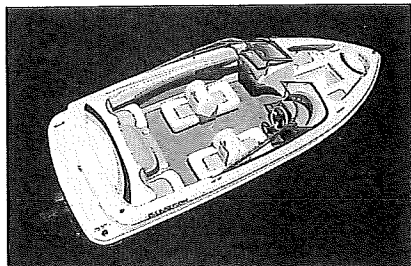

Sleeper Seating (SS)

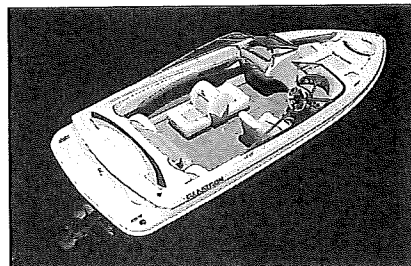

Bucket/Sleeper Seating (BS)

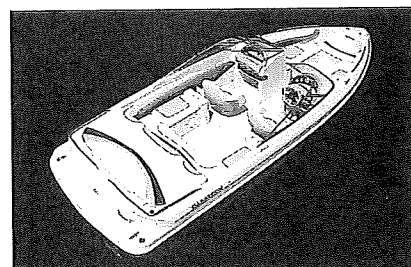

U-Shaped Seating (U)

GLASTRON



700 West River Road • Little Falls, MN 56345
Phone 320/632-8395 • Fax 320/632-1438