

GLASTRON | 2008



**Product
Specifications
Manual**

Table of Contents

Model Designator Key	2
2008 Model Directory	3
Over 50 Years of Leadership	4-5
Glastron Pricing: The Real Deal™	6-7
Glastron Performance	8
SSV® Hull Design	9
VEC® Technology	10-11
Unitized Hull & Stringer System	12
Unitized Deck & Floor	13
Customer Satisfaction	14
Glastron's Unmatched Warranty	15
Component Warranty Summary	16-17
Glastron Warranty	18-19
VEC® Warranty	20-21
Features & Benefits Summary	22-23
Canvas Choices	24
Seating Choices	25
EZ Loader® Trailers	26-27
Financing Guide	28
Definitions of Measurements	29
Model Specifications	30-81
Sterndrive Engine Specifications	82-89



Model Designator Key

- Letters in model name designate series
- First two numbers in model name designate boat length
- Third number in model name designates boat type:
 - 0 = outboard
 - 5 = sterndrive
 - 9 = cabin model

EXAMPLES:

GT 180 is an 18-foot outboard bowrider

DX 235 is a 23-foot sterndrive deck boat


GS 259 is a 25-foot cabin model

Model Directory

MX Bowriders	
MX 170	30
MX 175	32
GT Bowriders	
GT 180	34
GT 185	36
GT 205	38
GT 225	40
GT Ski & Fish	
GT 185 Ski & Fish	42
GT 205 Ski & Fish	44
GX Bowrider	
GX 205	46
GXL Bowriders	
GXL 185	48
GXL 205	50
GXL 235	52
GXL 255	54
GXL Ski & Fish	
GXL 180 Ski & Fish	56
GXL 185 Ski & Fish	58
GXL 205 Ski & Fish	60
Deck Boats	
DS 205	62
DS 215	64
DX 215	66
DX 235	68
GT Cabin Models	
GT 209	70
GT 249	72
GS Sport Cruisers	
GS 219	74
GS 259	76
GS 269	78
GS 279	80


Over 50 Years of Leadership in Family Boating

- Glastron has been making fiberglass boats for **52 years**—a milestone few boat companies have achieved. During that time, they have built **nearly half a million fiberglass runabouts**.

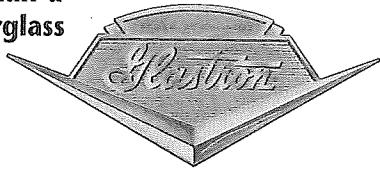


- More than any other manufacturer, Glastron has a **legacy of unprecedented product innovations and technological breakthroughs**. Among them:

- The deep-vee hull
- The tri-hull
- Two-tone graphics
- Sterndrive-powered boats
- The SSV® hull
- Fiberglass stringer systems
- VEC® closed-mold boat building technology

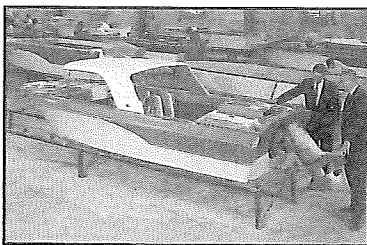

- More than a **few well-known people over the years have owned Glastron boats**, from President Lyndon Johnson...to England's Royal Family...to Elvis Presley. Glastron boats also appeared in **numerous movies and television shows**. Glastron was James Bond's boat of choice in Live and Let Die and Moonraker. The most famous Glastron ever? The Batboat!



- The **Glastron "sweep spear" is the most well-known icon in boating**. It's the marine industry's equivalent to the Nike "swoosh."



- Glastron's product line today encompasses many types of trailerable family boats: **bowriders, ski & fish models, deck boats, cuddy cabins and twin-cabin cruisers**.
- Throughout the company's 52-year history, its focus has been on designing and building boats that provide a great family boating experience. The company has always managed to stay ahead of other companies in building boats that possess three distinct Glastron qualities:
 - **Advanced technology**
 - **Highly functional, family-friendly designs**
 - **Outstanding performance**

Glastron's Pricing Philosophy


- Glastron's VEC® facility in Little Falls, Minnesota is now the most technologically-advanced boat building complex in the world. *Time* magazine called it "The Plant of the Future."




- This large-scale VEC production facility builds over 7,000 boats each year. Its high volume, combined with its high-tech boat building methods, has an added bonus: economy of scale.




- The bottom line: Glastron owners get a top-quality, high-tech boat at a surprisingly affordable price—we call it "The Real Deal" pricing.

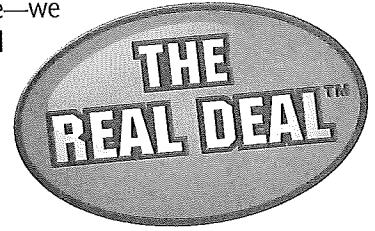

- "The Real Deal" prices are prominently featured on our U.S. website, along with prices for available options. Log on to www.glastron.com to get the full story and to build a Glastron boat to meet your exact needs.

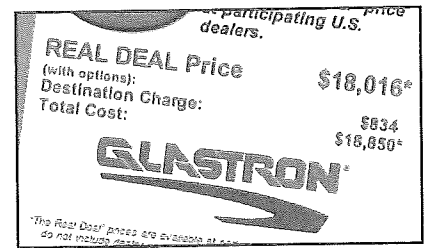


Glastron Performance

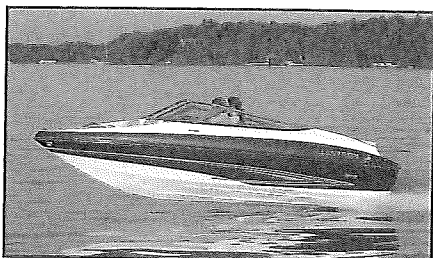

- Glastron's **penchant for performance** is known throughout the industry.
- Every Glastron model delivers performance attributes that every family boater can appreciate (and every Glastron owner knows):
 - **Very quick planing times** (and minimal bowrise)
 - **Impressive top speeds**
 - **Low minimum planing speeds** (particularly important for tubing, kneeboarding and wakeboarding)
 - **Agile handling**
 - **Excellent fuel economy**
- **Glastron provides performance data on every model.** Found on pages 30-81 of this manual, it includes authenticated speed, acceleration and, in many cases, fuel economy figures for popular engine choices.



SSV® Hull Design

- **A boat's hull design is the most important thing** that determines how that boat will perform. That's why Glastron has made hull design a top priority right from day one.
- The legendary **SSV® hull** (Super Stable Vee) is the biggest reason Glastron boats plane, run and corner so well.
- Compared to a deep-vee hull, Glastron's SSV hull is also **more stable when you're not underway**—a desirable benefit when you're fishing, anchored or docked.
- In boating circles, people recognize the SSV hull as **one of the best-performing hulls ever designed**. If there's any doubt, just ask any Glastron owner how well their boat performs.
- **Glastron's SSV hull is patented**; only Glastron has it. So no matter what other manufacturers may tell you, they don't have an SSV hull.




VEC® Technology

- VEC® technology (Virtual Engineered Composites) is a **patented process** developed by Genmar and introduced by Glastron in 2000.
- Other manufacturers build fiberglass boats in open molds, a process that is labor-intensive, messy and imprecise.

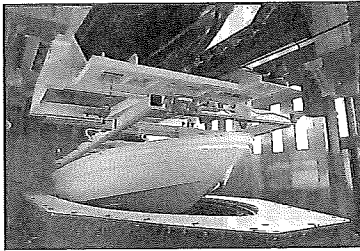


- VEC, on the other hand, is a **closed-mold process**.

- The VEC system is a highly automated, computer-controlled manufacturing process—one that results in a **near-perfect fiberglass boat hull every time**.
- VEC construction eliminates the need for wood stringers. A **fiberglass stringer system is an integral part of the hull**.
- Every VEC boat has a **skid-resistant fiberglass floor**.
- VEC is also a cleaner and more **environmentally-friendly** way to build boats. The fiberglass lamination portion of the VEC manufacturing process reduces styrene emissions by 90% compared to conventional hand-laid lamination.
- Glastron backs every VEC-built boat with the ultimate warranty: a **lifetime limited warranty** on all structural components. Just as important, that **warranty is transferable to the next owner of the boat**, which enhances resale value.



Unitized Hull & Stringer System

- Thanks to VEC® technology, most Glastron runabouts also have a completely **integrated hull and stringer system**.




- The hull and stringer system are molded as a **single fiberglass structure**.
- There are **no wooden stringers** as there are with conventional construction—so there's nothing to rot or separate.
- Integrated fiberglass construction means less weight and enhanced structural rigidity—in other words, a **lighter, stronger boat**.



Unitized Deck & Floor

- All Glastron runabouts are constructed with a **unitized deck/floor**.

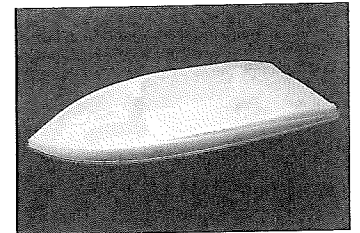

- The entire topside of the boat—deck, floor, side panels, footwells, seat bases—is **fabricated as single fiberglass component** (versus 2, 3 or more components in conventional construction).
- There are **no seams or joints**, which provides a clean and seamless look.
- Unitized construction means **unparalleled structural rigidity**, which translates to a greater strength.
- Another benefit: boats with a unitized construction have a **quieter, smoother, more responsive ride**. So not only can you *see* the difference, but you can actually *feel* the difference on the water.

Customer Satisfaction

- Glastron has always been known for its ability to anticipate the needs and wants of family boaters. As a result, **our boats possess the essential elements for a great boating experience:**
 - Attractive styling
 - Highly functional, family-friendly design
 - Impressive performance
 - Lots of built-in safety features
- Over the course of fifty years, **we've built a loyal following among Glastron owners.** They know us for quality products and outstanding customer support.
- **Glastron enjoys one of the industry's highest occurrences of repeat buyers.** Three out of four Glastron owners (we survey every new owner) indicate they're likely to buy another Glastron boat.



- **Glastron has received the industry's Excellence in Customer Satisfaction Award every year (2003, 2004, 2005, 2006 and 2007)** since the program was established by the National Marine Manufacturers Association (NMMA).

Glastron's Unmatched Warranty

Manufacturers of quality products tend to stand behind them, so the best way to judge the quality of a boat is to look at how well it's backed. When you compare Glastron warranties with those of other boat builders, you'll see that Glastron's are among the best in the marine industry.

- Every Glastron boat comes with a **lifetime limited warranty on the hull.**



- Glastron models built with VEC® technology models (17, 18, 20 and 22-foot runabouts) come with a **lifetime limited warranty on all structural components that is transferable to the second owner.**
- Glastron also provides a **2-year limited warranty on all components.*** That's twice as long as most boat builders.
- **Some factory-installed components are covered by an even longer warranty.** Individual items are summarized on pages 16-17.

**Propulsion warranties vary by manufacturer.*

Component Warranty Summary

<u>Company</u>	<u>Item</u>	<u>Warranty</u>
Faria	Instruments	Lifetime limited warranty
Inland	Perma Panel wood components	Lifetime limited warranty
G&T	Upholstery vinyl & fabrics	5 year limited warranty
Sunbrella	Canvas	5 year limited warranty
Bennett	Trim tabs	5 year limited warranty
Perko	Marine hardware	5 year limited warranty
Garelick	Seat pedestals	3 year limited warranty
Lowrance	Depth sounders & fish finders	3 year limited warranty
Moeller	Fuel tanks	3 year limited warranty
Syntec	Marine carpeting	3 year limited warranty
M & G Electronics	Dashes & wiring	3 year limited warranty
Jensen	AM/FM/CD player	3 year limited warranty
Novatron	Dash panel, switches & wiring	2 year limited warranty
Teleflex	Steering & control cables	2 year limited warranty
Minn Kota	Trolling motor	2 year limited warranty

<u>Company</u>	<u>Item</u>	<u>Warranty</u>
Rule	Bilge pumps & blowers	3 year limited warranty
Ameritex	Windshield	2 year limited warranty*
Moeller	Rotocast components	2 year limited warranty*
RMI	Rotocast components	2 year limited warranty*

** 1 year vendor warranty plus additional year of Glastron warranty.*

Volvo Penta	Sterndrive engine & outdrive	2 year limited warranty**
MerCruiser	Sterndrive engine & outdrive	2 year limited warranty
Evinrude	Outboard motor Direct Injection E-TEC	3 year limited warranty 3 year limited warranty
Mercury	Outboard motor 2 stroke up to 125 hp 2 stroke 150+ hp Optimax 4 stroke	1 year limited warranty 2 year limited warranty 3 year limited warranty 3 year limited warranty
Yamaha	Outboard motor 2 stroke 4 stroke	1 year limited warranty 3 year limited warranty

***North America only; 1 year limited warranty elsewhere.*

Glastron Limited Warranty

Glastron Boats warrants to you, the First Retail Purchaser of a new Glastron boat bought from a factory authorized North American dealer that it will repair or replace defects in materials or workmanship within the applicable Warranty Periods, subject to the "What This Warranty Does NOT Cover" section.

The applicable Warranty Period runs from the date of delivery to the first retail customer provided that the boat is delivered within twelve (12) months from the date of manufacture. For boats delivered more than twelve (12) months after the date of manufacture, coverage will run from the date of manufacture and the First Retail Purchaser will be entitled to the coverage remaining under the Warranty Periods. All warranties run concurrently.

Structural defects in the hull: Lifetime Limited Warranty

Defects in factory installed non-structural parts & components: Two (2) year Warranty Period

This warranty extends only to the First Retail Purchaser, but may be transferred to a second owner subject to other terms, limitations, and exclusions of the Glastron Limited Warranty. For a transfer fee of \$250 and the submittal of the Warranty Transfer Application, the Second Retail Purchaser may obtain a warranty for structural defects in the hull (the available warranty coverage period is the balance of 10 years from the date of the original purchase by the First Retail Purchaser) and factory installed non-structural parts and components (the available warranty coverage period is the balance of 2 years from the date of the original purchase by the First Retail Purchaser). The Warranty Transfer Application must be received by Glastron within 30 days of purchase by the Second Retail Purchaser. Proof of purchase date is required. The warranty may only be transferred **once**.

Your sole and exclusive remedy is the repair or replacement, at Glastron's sole option, of parts and components covered by this warranty.

This Glastron boat, including any alleged defective part, must be returned to an authorized Glastron dealer within the applicable warranty period to obtain warranty service. The Glastron dealer will carry out the warranty procedures on the owner's behalf. All warranty work will be performed at an authorized dealer, or at another repair facility that Glastron selects. The owner is responsible for the expense associated with transporting the boat to and from the repair facility.

An action for breach of warranty shall be barred unless it is commenced within four (4) years from the date the cause of action accrues. An action for breach of any duty or obligation to repair or replace shall be barred unless it is commenced within one year from the date the cause of action accrues regardless of the time remaining in the Warranty Period.

WHAT IS NOT COVERED:

This Warranty does not cover:

1. A boat purchased from any party other than an authorized Glastron dealer.
2. A boat, including its components that have been altered or modified so as to adversely affect its operation, performance or durability.
3. Engines, outdrive, controls, propellers, batteries, appliances and other equipment or accessories that are not manufactured by Glastron, whether or not warranted by other manufacturers.
4. Gelcoat finishes (including blistering and osmotic blistering, cracking, crazing or discoloration), mirrors, window glass, varnishes, paints, fabrics, chromium plated and stainless steel finishes, because of the varying affects resulting from different climatic and use conditions.
5. The cost of removal or re-instatement of parts or disassembly of units to repair or replace components covered by this warranty.
6. Any boat which has been misused, used in a negligent manner, used for racing, used for rental, charter, military or other commercial purposes, used without normal maintenance, operated contrary to any instruction furnished by Glastron, or operated in violation of any Federal, State, Coast Guard or other governmental agency laws, rules or regulations.
7. Any representation relating to speed, range, fuel consumption or other estimated performance characteristic.
8. Loss of time, inconvenience, boat payments, retail charges, improper lifting or trailering, travel expense, loss of use, in-and-out-of-water charges, towing and storage charges, loss of or damage to personal property, or other remedies not specifically allowed.
9. Dealer preparation, cleaning, final adjustments and alignments in preparing the boat for delivery or commissioning.
10. Leakage around windshield, hatches or other designed openings.
11. Fit and adjustment of exterior canvas tops, enclosures, and weather covers.
12. Sacrificial deterioration of anti-fouling paint or zinc anodes.

Remedy under this warranty is **expressly limited to repair or replacement** of defects in materials or workmanship, and **does not include incidental or consequential damages** which are specially **DISCLAIMED**. **NOTE: SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU.** The express limited warranty described on previous page is exclusive. All **IMPLIED WARRANTIES ARE LIMITED IN THEIR DURATION TO THE ONE (1) YEAR WARRANTY PERIOD**. ALL IMPLIED WARRANTIES, INCLUDING **MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED** IN THEIR ENTIRETY AFTER EXPIRATION OF THE ONE (1) YEAR WARRANTY PERIOD. There are no warranties which extend beyond the description of the face hereof. **NOTE: SOME STATES DO NOT ALLOW LIMITATION ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.**

This document contains the entire warranty given by Glastron. Glastron does not authorize any person or persons, including its Glastron dealers, to change the terms of this express limited warranty, which is Glastron's **only** warranty. Glastron reserves the right to change or improve the design or manufacture of Glastron boats without obligation to modify any boat previously manufactured.

VEC® Lifetime Limited Warranty

Glastron Boats warrants to you, the First Retail Purchaser of this boat manufactured with VEC® technology, that it will repair or replace defects in materials or workmanship that occur within the applicable Warranty Periods, subject to the "What This Warranty Does Not Cover" section on the following page. The applicable Warranty Periods run from the date of purchase to the first retail customer provided that the boat is delivered within twelve (12) months from the date of dealer invoice. For boats delivered more than twelve (12) months after the date of invoice, coverage will run from the date of invoice and the First Retail Purchaser will be entitled to the coverage remaining under the Warranty Periods. All warranties run concurrently.

Warranty Periods:

Structural defects in the hull, deck, floor, stringers and transom:
Lifetime Limited Warranty

Defects in factory installed non-structural parts and components:
Two (2) year Warranty Period

Defects in gelcoat cosmetics, including cracking, crazing, discoloration and fading: *One (1) year Warranty Period*

Defects causing gelcoat blistering: *Five (5) year Warranty Period, except that Glastron shall have no liability or responsibility to correct or repair any damage if the original gel surface has been altered in any way, including repair, application of any coating other than marine anti-fouling bottom paint, improper surface preparation for paint, or excessive sanding or sandblasting*

This warranty extends only to the First Retail Purchaser but may be transferred to a second owner subject to other terms, limitations, and exclusions of the Glastron Limited Warranty. For a transfer fee of \$250 and the submittal of the Warranty Transfer Application, the Second Retail Purchaser may obtain a warranty for structural defects in the hull, deck, floor, stringers, and transom (the available warranty coverage period is the balance of 10 years from the date of the original purchase by the First Retail Purchaser and factory installed non-structural parts and components (the available warranty coverage period is the balance of 2 years from the date of the original purchase by the First Retail Purchaser). The Warranty Transfer Application must be received by Glastron within 30 days of purchase by the Second Retail Purchaser. Proof of purchase date is required. The warranty may only be transferred **once**.

Your sole and exclusive remedy is the repair or replacement, at its sole option, of parts and components covered by this warranty.

This Glastron boat, including any alleged defective part, must be returned to an authorized Glastron dealer within the applicable warranty period to obtain warranty service. The Glastron dealer will carry out the warranty procedures on the owner's behalf. All warranty work will be performed at an authorized dealer, at the Glastron factory, or at another repair facility that Glastron selects. The owner is responsible for the expense associated with transporting the boat to and from the repair facility.

An action for breach of warranty shall be barred unless it is commenced within four (4) years from the date the cause of action accrues. An action for breach of any duty or obligation to repair or replace shall be barred

unless it is commenced within one (1) year from the date the cause of action accrues regardless of the time remaining in the Warranty Period.

What This Warranty Does Not Cover:

1. A boat purchased from any party other than an authorized Glastron dealer.
2. A boat, including its components, that has been altered or modified so as to adversely affect its operation, performance or durability.
3. Dealer or customer installed parts or components, or any damage to the boat due to installation of aftermarket parts and components.
4. Engines, outdrives, controls, propellers, batteries and other equipment or accessories that are not manufactured by Glastron, whether or not warranted by other manufacturers.
5. Windshield breakage and leakage around windshields, hatches or other designed openings.
6. Any boat that has been misused, used in a negligent manner, used for racing, used for rental or other commercial purposes, used without normal maintenance, operated contrary to any instruction furnished by Glastron, involved in an accident, or operated in violation of any Federal, State, Coast Guard or other governmental agency laws, rules or regulations.
7. Weight, speed, fuel consumption, or other estimated performance characteristic.
8. Loss of time, inconvenience, boat payments, retail charges, travel expense, loss of use, haul out, launch, towing and storage charges, loss of or damage to personal property, or other remedies not specifically allowed.
9. A boat that has been overpowered according to the maximum recommended engine horsepower specified on the capacity plate.
10. Canvas, zippers, vinyl, upholstery, plastics, fabric, or trim.
11. Dealer preparation, cleaning, final adjustments and alignments in preparing the boat for delivery.
12. Repairs made necessary due to inadequate trailering or trailer support, or trailers that are improperly assembled, designed or adjusted.

Remedy under this warranty is expressly limited to repair or replacement of defects in materials or workmanship, **and does not include incidental or consequential damages** that are specifically **DISCLAIMED**. Note: SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. The express limited warranty described above is exclusive. All **IMPLIED WARRANTIES ARE LIMITED IN THEIR DURATION TO TWO (2) YEARS FROM THE DATE OF PURCHASE**. IMPLIED WARRANTIES (IF ANY) INCLUDING **MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED** IN THEIR ENTIRETY AFTER TWO (2) YEARS FROM THE DATE OF PURCHASE. There are no warranties which extend beyond the description on the face hereof. **NOTE: SOME STATES DO NOT ALLOW LIMITATION ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS WHICH VARY FROM STATE TO STATE.**

This document contains the entire warranty given by Glastron. Glastron does not authorize any person or persons, including Glastron dealers, to change the terms of this express limited warranty, which is Glastron's only warranty. Glastron reserves the right to change or improve the design or manufacture of Glastron boats without obligation to modify any boat previously manufactured.

Features & Benefits Summary


FEATURES:

BENEFITS:


- | | |
|--|--|
| 1. 50+ year brand legacy | Glastron was the first company to produce fiberglass boats on a large scale; no other manufacturer has as many product innovations and technological breakthroughs |
| 2. Performance | With a Glastron boat, performance is designed in from the start |
| 3. Patented SSV® hull design | Quick planing; superior handling; enhanced fuel economy |
| 4. VEC® construction on 17, 18, 20 and 22-foot runabout models | State-of-the-art technology with lifetime limited transferable warranty on structural components |
| 5. Unitized deck/floor construction on most runabout models | Clean, seamless appearance; greater structural integrity; smooth, quiet, responsive ride |
| 6. Unitized hull & stringer system on most runabout models | Stronger, lighter, won't rot |
| 7. Key structural areas are reinforced with multi-axial knitted fiberglass | Double strength in this important area |
| 8. All deck fittings are backed by under-deck supports fiberglassed into deck | Strength; durability |

- | | |
|---|--|
| 9. Aircraft locknuts on bolts | Strength; long-term durability |
| 10. One-piece, lock looped marine-grade carpet | Better appearance; no seams |
| 11. Marine-grade vinyl; marine-grade stitching | UV protected |
| 12. Ski locker drain in subfloor | Lets water drain into bilge, keeping locker dry |
| 13. Tilt steering wheel standard on most models | More comfortable steering position |
| 14. Individual Faria® analog gauges | Easy-to-read; lifetime warranty |
| 15. Gas fill is located on side of boat (never over swim platform) | Eliminates risk of fuel spilling onto swim platform |
| 16. Low, built-in swim platform with stainless steel boarding ladder | Ease of boarding |
| 17. Boarding ladder on runabouts is located on starboard side of swim platform | Allows driver to see skier at all times when circling for pickup |
| 18. Each model is carefully designed for the proper weight-to-horsepower ratio | Better planing time; better fuel economy; better top speed |
| 19. Choice of MerCruiser® or Volvo Penta® sterndrive power | Customer can select preferred brand |
| 20. Choice of Mercury®, Yamaha® or Evinrude® outboard power | Customer can select preferred brand |

Canvas Choices




Soft Top




Bimini Top




Canvas Package




Camper Canvas Package



Bow Cover



Cockpit Cover



Mooring Cover


MX models feature blue Sunbrella® fabric.

GT, GX, GXL, DS and DX models in blue and red feature color-matched Sunbrella fabric; black and yellow models feature black Sunbrella fabric.


GS models feature color-matched black, blue and sand Sunbrella fabric.

All mooring covers feature gray canvas with waterproof inner liner.


Seating Choices

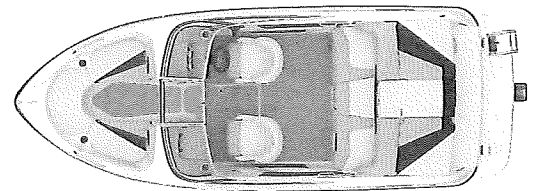

Sport Seating (SL)

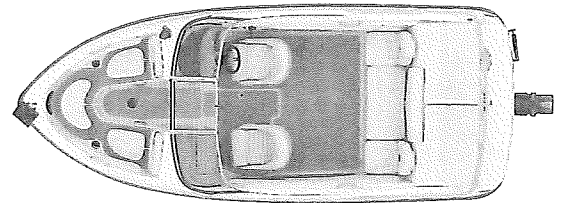

Ski & Fish Seating (SF)

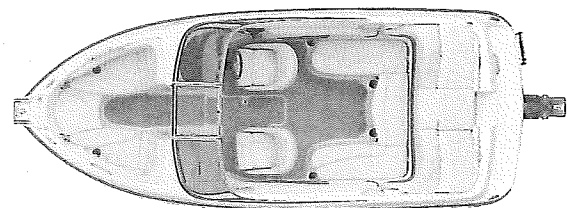

U-Shaped Seating (U)

Sport Seating (SL) standard on MX models, GT 180, GT 185, GT 205, GX 205 and GXL 185.

Ski & Fish Seating (SF) featured on GT Ski & Fish models and GXL Ski & Fish models.

U-Shaped Seating (U) standard on GT 225, GXL 205, GXL 235 and GXL 255.

EZ Loader Custom Boat Trailers

Glastron Boat Model	Trailer Model	Axle(s)
MX 170	MX 3000S	Single w/Brakes
MX 175	MX 3000S	Single w/Brakes
GT 180	GM 3000S	Single w/Brakes
GT 185	GM 3000S	Single w/Brakes
GT 205	GM 3500S	Single w/Brakes
GT 225	GM 4000T	Tandem w/Brakes One Axle
GT 185 SF	GM 3500S	Single w/Brakes
GT 205 SF	GM 3500S	Single w/Brakes
GT 209	GM 4000T	Tandem w/Brakes One Axle
GT 249 (Non-Package)	GM 5800T	Tandem w/Brakes One Axle
GX 205	GM 3500S	Single w/Brakes
GXL 185	GM 3500S	Single w/Brakes
GXL 205	GM 3500S	Single w/Brakes
GXL 235	GM 5200T	Tandem w/Brakes One Axle
GXL 255	GM 5800T	Tandem w/Brakes One Axle
GXL 180 SF	GM 3500S	Single w/Brakes
GXL 185 SF	GM 3500S	Single w/Brakes
GXL 205 SF	GM 4000T	Tandem w/Brakes One Axle
DS 205	GM 4000T	Tandem w/Brakes One Axle
DS 215	GM 5200T	Tandem w/Brakes One Axle
DX 215	GM 5200T	Tandem w/Brakes One Axle
DX 235	GM 5800T	Tandem w/Brakes One Axle
GS 219	GM 4400T	Tandem w/Brakes One Axle
GS 259 (Non-Package)	GM 7500T	Tandem w/Brakes One Axle
GS 269 (Non-Package)	GM 7500T	Tandem w/Brakes One Axle
GS 279 (Non-Package)	GM 7500T	Tandem w/Brakes One Axle

2008 Standard MX Model Features:

Blue Paint, Hydraulic Drum Brakes, Carlisle Bias Tires, Ultra Silver Painted Wheels, Swing Tongue

2008 Standard Features on All Other Models:

Black Paint, Hydraulic Disc Brakes, Carlisle Radial Tires, Ultra Silver Painted Wheels, Aluminum Tread Plate on Steps, LED Lights, UFP Oil Bath, Swing Tongue Standard on all Trailers thru GM 4400T

Standard Galvanized Bunk Trailers

Glastron Boat Model	Trailer Model
MX 170	EZL96B 15-18 2450NB
MX 175	EZL96B 15-18 2800H1X
GT 180	EZL96B 15-18 2450NB
GT 185	EZL96B 15-18 3100H1X
GT 205	TEZL96B 17-20 4000H1X
GT 225	TEZL96B 17-20 4000H1X
GT 185 SF	EZL96B 15-18 3100H1X
GT 205 SF	TEZL96B 17-20/22 4000H1X
GT 209	TEZL96B 17-20/22 4000H1X
GT 249 (Non-Package)	TEZB 23-25 5800H1X
GX 205	TEZL96B 17-20/22 4000H1X
GXL 185	EZL96B 17-20 3100H1X
GXL 205	TEZL96B 17-20/22 4000H1X
GXL 235	TEZL96B 19-22 4700H1X
GXL 255	TEZB 23-25/27 5800H1X
GXL 180 SF	EZL96B 15-18 3100H1X
GXL 185 SF	TEZL96B 17-20/22 4000H1X
GXL 205 SF	TEZL96B 17-20/22 4000H1X
DS 205	TEZL96B 17-20/22 4000H1X
DS 215	TEZL96B 19-22 5200H1X
DX 215	TEZL96B 19-22 5200H1X
DX 235	TEZB 19-22 5200H1X
GS 219	TEZL96B 19-22 4700H1X
GS 259 (Non-Package)	TEZB 23-25/27 5800H1X
GS 269 (Non-Package)	TEZB 23-25 7500H1X
GS 279 (Non-Package)	TEZB 23-25/27 7500H1X

Aluminum Bunk Trailers

Glastron Boat Model	Trailer Model
MX 170	ALB 16-18 2800H1X
MX 175	ALB 16-18 3100H1X
GT 180	ALB 16-18 2800H1X
GT 185	ALB 16-18 3100H1X
GT 205	TALB 18-21 4000H1X
GT 225	TALB 18-21 4000H1X
GT 185 SF	ALB 16-18 3100H1X
GT 205 SF	TALB 18-21 4000H1X
GT 209	TALB 18-21 4000H1X
GT 249 (Non-Package)	TALB 21-25 6200H1X
GX 205	TALB 18-21 4000H1X
GXL 185	ALB 16-18 3100H1X
GXL 205	TALB 18-21 4000H1X
GXL 235	TALB 20-23 5000H1X
GXL 255	TALB 21-25 6200H1X
GXL 180 SF	ALB 16-18 3100H1X
GXL 185 SF	TALB 18-21 4000H1X
GXL 205 SF	TALB 18-21 4000H1X
DS 205	TALB 18-21 4000H1X
DS 215	TALB 20-23 5000H1X
DX 215	TALB 20-23 5000H1X
DX 235	TALB 21-25 6200H1X
GS 219	TALB 20-23 5000H1X
GS 259 (Non-Package)	TALB 23-27 6200H1X
GS 269 (Non-Package)	TALB 23-27 7900H1X
GS 279 (Non-Package)	TALB 23-27 7900H1X

Trailer models beginning with "T" are tandem axle.

Monthly Payments

Length of Loan	Interest Rate	Payment Per \$1000
3 years	6.00%	30.42
	6.50%	30.65
	7.00%	30.88
	7.50%	31.11
	8.00%	31.34
	8.50%	31.57
	9.00%	31.80
5 years	6.00%	19.33
	6.50%	19.57
	7.00%	19.80
	7.50%	20.04
	8.00%	20.28
	8.50%	20.52
	9.00%	20.76
7 years	6.00%	14.61
	6.50%	14.85
	7.00%	15.09
	7.50%	15.34
	8.00%	15.59
	8.50%	15.84
	9.00%	16.09
8 years	6.00%	13.14
	6.50%	13.39
	7.00%	13.63
	7.50%	13.88
	8.00%	14.14
	8.50%	14.39
	9.00%	14.65
10 years	6.00%	11.10
	6.50%	11.35
	7.00%	11.61
	7.50%	11.87
	8.00%	12.13
	8.50%	12.40
	9.00%	12.67
12 years	6.00%	9.76
	6.50%	10.02
	7.00%	10.28
	7.50%	10.55
	8.00%	10.82
	8.50%	11.10
	9.00%	11.38
15 years	6.00%	8.44
	6.50%	8.71
	7.00%	8.99
	7.50%	9.27
	8.00%	9.56
	8.50%	9.85
	9.00%	10.14

Definitions of Measurements

Length Overall (LOA) — Distance along the centerline from the tip of the bow to the aft-most part of the hull.

Maximum Beam — Maximum width of the boat.

Transom Width — Maximum width of the boat at the transom.

Depth — Vertical distance from the lowest point of the keel to the highest point of the boat, excluding windshields, lights and other removable components.

Transom Deadrise — Angle of the hull at the transom, as measured in degrees, relative to the water.

Maximum Depth — Vertical distance from the lowest point of the keel to the highest point of the boat, including windshields.

Cockpit Depth — Vertical distance from the boat floor to the top of gunwale as measured at the driver's seat.

Length Overall on Trailer — Distance measured along the boat centerline, from forward-most point of trailer to aft-most point of motor/outdrive.

Boat Height on Trailer — Vertical distance from the ground to the highest point of boat, including the windshield.

Draft (drive unit up) — Total number of inches of boat and/or motor and drive unit below the waterline. Measured unloaded, with the motor/drive unit in the full up position.

Draft (drive unit down) — Total number of inches of boat and/or motor and drive unit below the waterline. Measured unloaded, with the motor/drive unit in the full down position.



Specifications

LOA 17'1" (5.21 m.)
Beam 88" (2.24 m.)
Depth 43" (1.09 m.)
Maximum Depth 59" (1.50 m.)
Cockpit Depth 28½" (.72 m.)
Approx. Wt. 1485 lbs. (674 kg.)
 w/o Engine

Transom Deadrise 21°
LOA on Trailer 21'6" (6.55 m.)
Fuel Capacity 23 gal. (87 L.)
Maximum Load 1800 lbs. (816 kg.)
Max. Persons 7 or 1150 lbs. (522 kg.)
Max. Horsepower 150 (112 kw.)
 NMMA Certified

Transom Width 86" (2.18 m.)

Draft: A. Drive Unit Up 15½" (.39 m.)
 B. Drive Unit Down 28½" (.72 m.)

Standard Features

Adjustable bucket seats
 Bilge pump
 Bow seats w/concealed storage
 Integrated bow steps
 Integrated swim platform
 Passenger grab handles
 Rear bench seat w/open storage

Ski locker
 Stainless steel bow & stern eyes
 Stainless steel boarding ladder
 Unitized fiberglass deck/floor
 Walk-thru curved windshield
 VEC technology

Optional Features

AM/FM/CD stereo w/2 speakers
 Flip-up bucket seats (1 or 2)
 Glove box
 Low profile black windshield
 Ski tow pylon
 Snap-in carpet

XL Package: snap-in carpet,
 AM/FM/CD stereo w/2 speakers,
 glove box, forward bow pull-up
 cleat, forward bow cushion,
 flip-up bucket helm seat &
 stainless steel rubrail

Optional Canvas

Bimini top & boot
 Bimini top & boot for low profile
 windshield
 Bow cover

Canvas Package: bow cover, walk-thru
 curtain, side curtains, stern curtain
 Cockpit cover
 Soft top & boot
 Mooring cover

(All canvas choices except mooring cover are color-coordinated Sunbrella fabric)

Standard Color

White w/Blue & Yellow Graphics

Engine Choices

Evinrude 115 DSLSD
 Evinrude 150 DSLSD

Mercury 90 ELPT Optimax
 Mercury 115 ELPT Optimax
 Mercury 135 L Optimax
 Mercury 150 L Optimax

Yamaha 90 TLR
 Yamaha 115 TLR
 Yamaha F 115 TLR
 Yamaha 150 TLR
 Yamaha F 150 TLR

Performance

Engine: Evinrude E-TEC 115 FastStrike: 19 pitch

RPM	MPH	GPH	RANGE*
2500	15	2.9	107
3200	25	4.2	123
4200	35	6.3	115
WOT	43-45	—	—

Time to plane: 3.5 seconds
 Acceleration 0-20 MPH: N/A**

Engine: Evinrude E-TEC 150 FastStrike: 19 pitch

RPM	MPH	GPH	RANGE*
2400	15	3.7	84
3200	30	5.0	124
4200	40	7.5	110
WOT	49-52	—	—

Time to plane: 3.2 seconds
 Acceleration 0-20 MPH: N/A**


* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

** Not available.

Performance data is measured with two passengers,
 ¾ to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load,
 weather/water conditions, and optional equipment, such as
 wakeboard tower, extended swim platform and generator.

MX 175

Same as 2011 MX185


Specifications

- Length 17' 1" (5.21 m.)
- Beam 88" (2.24 m.)
- Depth 44" (1.12 m.)
- Maximum Depth 57" (1.45 m.)
- Cockpit Depth 28 1/2" (.72 m.)
- Approx. Wt. 2280 lbs. (1035 kg.) w/3.0 GL Volvo Penta
- Transom Width 86" (2.18 m.)
- Transom Deadrise 21"
- LOA on Trailer 21' 10" (6.65 m.)
- Fuel Capacity 23 gal. (87 L.)
- Maximum Load 1100 lbs. (499 kg.)
- Max. Persons 7 or 1000 lbs. (454 kg.)
- NMMA Certified
- Draft: A. Drive Unit Up 16" (.41 m.)
 B. Drive Unit Down 31" (.79 m.)

Standard Features

- Adjustable bucket seats
- Bilge pump
- Bow seats w/concealed storage
- Integrated bow steps
- Integrated swim platform
- Padded sunlounge
- Passenger grab handles
- Rear bench seat w/open storage
- Ski locker
- Ski tow ring
- Stainless steel bow & stern eyes
- Stainless steel boarding ladder
- Unitized fiberglass deck/floor
- Walk-thru curved windshield
- VEC technology

Optional Features

- AM/FM/CD stereo w/2 speakers
- Flip-up bucket seats (1 or 2)
- Glove box
- High altitude propeller
- Low profile black windshield
- Snap-in carpet
- XL Package: snap-in carpet, AM/FM/CD stereo w/2 speakers, glove box, forward bow pull-up cleat, forward bow cushion, flip-up bucket helm seat & stainless steel rubrail

Optional Canvas

- Bimini top & boot
- Bimini top & boot for low profile windshield
- Bow cover
- Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain
- Cockpit cover
- Soft top & boot
- Mooring cover

(All canvas choices except mooring cover are color-coordinated Sunbrella fabric)

Standard Color

White w/Blue & Yellow Graphics

SNAP in carpet for this model - same as 2011 MX185
~~135-18038~~ 135-80338
 Lay in Carpet same as MX185 - 2011 use

Note! 2011 MX185 2008 w/out retro swim platform to MX175
 Engine Choices

- 3.0L MerCruiser (135 hp)
- 4.3L MerCruiser (190 hp)
- 3.0 GL Volvo Penta (135 hp)
- 4.3 GL Volvo Penta (190 hp)

Performance

Engine: 3.0 GL Volvo Penta, Prop: 21 pitch

RPM	MPH	GPH	RANGE*
2000	10	2.1	99
3000	20	3.2	129
4000	35	7.6	95
WOT	41-44	-	-

Time to plane: 3.7 seconds
 Acceleration 0-20 MPH: 6.5 seconds

Engine: 3.0L MerCruiser, Prop: 21 pitch

RPM	MPH	GPH	RANGE*
2000	10	2.2	94
3000	22	3.4	134
4000	34	7.5	93
WOT	41-43	-	-

Time to plane: 3.8 seconds
 Acceleration 0-20 MPH: N/A**

* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.
 ** Not available.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet. Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

2008 MX175 - Sundeck Different Than - 2011 MX185

CARPET KIT
 135-80038
 -80338
 -80339
 2011 MX185



Specifications

Length 17' 1" (5.21 m.)
Beam 88" (2.24 m.)
Depth 43" (1.09 m.)
Maximum Depth 59" (1.50 m.)
Cockpit Depth 28½" (.72 m.)
Approx. Wt. 1500 lbs. (680 kg.) w/o engine
Transom Width 86" (2.18 m.)
Transom Deadrise 21°
LOA on Trailer 21' 6" (6.55 m.)
Fuel Capacity 23 gal. (87 L.)
Maximum Load 1800 lbs. (816 kg.)
Max. Persons 8 or 1150 lbs. (522 kg.)
Max. Horsepower 150 (112 kw.)
NMMA Certified

Draft: A. Drive Unit Up 15½" (.39 m.)
B. Drive Unit Down 28½" (.72 m.)

Standard Features

Adjustable deluxe bucket seats
 AM/FM/CD stereo w/2 speakers
 Bilge pump
 Bow seats w/concealed storage
 Bow step/platform with removable cushion
 Glove box
 Integrated swim platform
 Passenger grab handles
 Rear bench seating w/concealed storage
 Ski locker
 Stainless steel boarding ladder
 Stainless steel bow & stern eyes
 Two-tone deck & hull graphics
 Unitized fiberglass deck/floor
 Walk-thru curved windshield
 VEC technology

Optional Features

3-step boarding ladder
 Convenience Package: automatic bilge pump, hour meter & depth sounder
 Flip-up bucket seat (1 or 2)
 Full side glass windshield
 Low profile black windshield
 Sirius satellite radio
 Ski tow pylon
 Snap-in carpet
 Tilt steering wheel
 XL Package: 3-step boarding ladder, tilt steering wheel, full side glass windshield, convenience package, flip-up bucket helm seat, ski tow pylon, snap-in carpet, forward bow pull-up cleat, stainless steel rubrail, stainless steel drink holders & chrome speaker covers

Optional Canvas

Bimini top & boot
 Bimini top & boot for low profile windshield
 Bow cover
 Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain
 Cockpit cover
 Soft top & boot
 Mooring cover

(All canvas choices except mooring cover are color-coordinated Sunbrella fabric)

Color Choices

White/Black
 White/Blue
 White/Red
 White/Yellow

Engine Choices

Evinrude 115 DSLSD
 Evinrude 150 DSLSD
 Mercury 90 ELPT Optimax
 Mercury 115 ELPT Optimax
 Mercury 135 L Optimax
 Mercury 150 L Optimax
 Yamaha 90 TLR
 Yamaha 115 TLR
 Yamaha F 115 TLR
 Yamaha 150 TLR
 Yamaha F 150 TLR

Performance

Engine: Evinrude E-TEC 115 FastStrike: 19 pitch

RPM	MPH	GPH	RANGE*
2500	15	2.9	107
3200	25	4.2	123
4200	35	6.3	115
WOT	43-45	—	—

Time to plane: 3.5 seconds
 Acceleration 0-20 MPH: N/A**

Engine: Evinrude E-TEC 150 FastStrike: 19 pitch

RPM	MPH	GPH	RANGE*
2400	15	3.7	84
3200	30	5.0	124
4200	40	7.5	110
WOT	49-52	—	—

Time to plane: 3.2 seconds
 Acceleration 0-20 MPH: N/A**

* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

** Not available.

Performance data is measured with two passengers, ¾ to full tank of fuel, at altitudes of 0 to 1200 feet. Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.



Specifications

Length w/swim platform

18'5" (5.61 m.)
Beam 88" (2.24 m.)
Depth 44" (1.12 m.)
Maximum Depth 59" (1.50 m.)
Cockpit Depth 28 1/2" (.72 m.)
Approx. Wt. 2315 lbs. (1050 kg.)
 w/3.0 GL Volvo Penta

Transom Deadrise 21°
Transom Width 86" (2.18 m.)
LOA on Trailer 21' 10" (6.65 m.)
Fuel Capacity 23 gal. (87 L.)
Maximum Load 1150 lbs. (522 kg.)
Max. Persons 8 or 1150 lbs. (522 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.)
B. Drive Unit Down 31" (.79 m.)

Standard Features

Adjustable deluxe bucket seats
 AM/FM/CD stereo w/2 speakers
 Automatic bilge pump
 Extended swim platform
 w/3-step ladder
 Glove box
 Integrated bow steps
 w/removable cushion
 Padded sunlounge
 Passenger grab handles

Rear bench seating
 w/concealed storage
 Ski locker
 Ski tow ring
 Stainless steel boarding ladder
 Stainless steel bow & stern eyes
 Two-tone deck & hull graphics
 Unitized fiberglass deck/floor
 Walk-thru curved windshield
 VEC technology

Optional Features

Convenience Package: hour meter & depth sounder
 Flip-up bucket seat (1 or 2)
 Full side glass windshield
 High altitude propeller
 Low profile black windshield
 Sirius satellite radio
 Snap-in carpet
 Tilt steering wheel

Wakeboard tower
 XL Package: tilt steering wheel, full side glass windshield, convenience package, flip-up bucket helm seat, snap-in carpet, forward bow pull-up cleat, stainless steel rubrail, stainless steel drink holders & chrome speaker covers

Optional Canvas

Bimini top & boot
 Bimini top for wakeboard tower
 Bimini top & boot for low profile windshield
 Bow cover

Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain
 Cockpit cover
 Soft top & boot
 Mooring cover

(All canvas choices except mooring cover are color-coordinated Sunbrella fabric)

Color Choices

White/Black
 White/Blue
 White/Red
 White/Yellow

Engine Choices

3.0L MerCruiser (135 hp)
 4.3L MerCruiser (190 hp)

3.0 GL Volvo Penta (135 hp)
 4.3 GL Volvo Penta (190 hp)

Performance

Engine: 3.0 GL Volvo Penta, Prop: 21pitch

RPM	MPH	GPH	RANGE*
2000	8	2.1	99
3000	25	3.2	129
4000	37	7.6	95
WOT	41-43	—	—

Time to plane: 4.2 seconds
 Acceleration 0-20 MPH: 7.4 seconds

Engine: 4.3L MerCruiser, Prop: 23 pitch

RPM	MPH	GPH	RANGE*
2400	15	3.0	104
3200	35	5.0	145
4000	45	8.5	110
WOT	48-50	—	—

Time to plane: 3.5 seconds
 Acceleration 0-20 MPH: N/A**

* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

** Not available.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.



Specifications

Length w/swim platform
20' 8" (6.30 m.)

Beam 92" (2.33 m.)

Depth 43" (1.09 m.)

Maximum Depth 56" (1.42 m.)

Cockpit Depth 29" (.74 m.)

Approx. Wt. 2780 lbs. (1260 kg.)
w/4.3 GL Volvo Penta

Transom Deadrise 21°

Transom Width 88" (2.24 m.)

LOA on Trailer 24' 6" (7.46 m.)

Fuel Capacity 35 gal. (132 L.)

Maximum Load 1275 lbs. (578 kg.)

Max. Persons 9 or 1275 lbs. (578 kg.)

NMMA Certified

Draft: A. Drive Unit Up 16½" (.42 m.)

B. Drive Unit Down 31½" (.80 m.)

Standard Features

Adjustable deluxe bucket seats

AM/FM/CD stereo w/2 speakers

Automatic bilge pump

Extended swim platform

w/3-step ladder

Glove box

Integrated bow steps

w/removable cushion

Padded sunlounge

Passenger grab handles

Rear bench seating

w/concealed storage

Ski locker

Ski tow ring

Stainless steel boarding ladder

Stainless steel bow & stern eyes

Two-tone deck & hull graphics

Unitized fiberglass deck/floor

Walk-thru curved windshield

Walk-thru transom boarding gate

VEC technology

Optional Features

Convenience Package: hour meter & depth sounder

Flip-up bucket seat (1 or 2)

Full side glass windshield

High altitude propeller

Low profile black windshield

Sirius satellite radio

Snap-in carpet

Tilt steering wheel

Wakeboard tower

XL Package: tilt steering wheel, full side glass windshield, convenience package, flip-up bucket helm seat, snap-in carpet, forward bow pull-up cleat, stainless steel rubrail, stainless steel drink holders & chrome speaker covers

Optional Canvas

Bimini top & boot

Bimini top for wakeboard tower

Bimini top & boot for low profile

windshield

Bow cover

(All canvas choices except mooring cover are color-coordinated Sunbrella fabric)

Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain

Cockpit cover

Soft top & boot

Mooring cover

Color Choices

White/Black

White/Blue

White/Red

White/Yellow

Engine Choices

3.0L MerCruiser (135 hp)

4.3L MerCruiser (190 hp)

4.3L MPI MerCruiser (220)

5.0L MerCruiser (220 hp)

5.0L MPI MerCruiser (260 hp)

3.0 GL Volvo Penta (135 hp)

4.3 GL Volvo Penta (190 hp)

4.3 GXi Volvo Penta (225 hp)

5.0 GL Volvo Penta (220 hp)

5.0 GXi Volvo Penta (270 hp)

Performance

Engine: 4.3L MerCruiser, Prop: 23 pitch

RPM	MPH	GPH	RANGE*
2000	15	2.8	169
3000	25	3.8	207
4000	35	6.9	160
WOT	47-49	—	—

Time to plane: 3.5 seconds

Acceleration 0-20 MPH: N/A**

Engine: 5.0 GL Volvo Penta, Prop: 19 pitch

RPM	MPH	GPH	RANGE*
2500	9	3.5	135
3000	29	8.5	148
4000	40	9.8	145
WOT	50-52	—	—

Time to plane: 2.6 seconds

Acceleration 0-20 MPH: 3.8 seconds

Engine: 5.0 GXi Volvo Penta, Prop: 21 pitch

RPM	MPH	GPH	RANGE*
2000	13	3.6	114
3000	31	6.5	149
4000	45	11.0	130
WOT	55-58	—	—

Time to plane: 2.8 seconds

Acceleration 0-20 MPH: N/A**

* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

** Not available.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

GT 225



Specifications

Length 21' 6" (6.55 m.)
Beam 99½" (2.53 m.)
Depth 46½" (1.18 m.)
Maximum Depth 59½" (1.51 m.)
Cockpit Depth 30½" (.77 m.)
Approx. Wt. 3000 lbs. (1364 kg.)
 w/5.0 GL Volvo Penta
Transom Width 92" (2.34 m.)
Transom Deadrise 21°
LOA on Trailer 25' 4" (7.72 m.)
Fuel Capacity 35 gal. (132 L.)
Maximum Load 1475 lbs. (669 kg.)
Max. Persons 10 or 1475 lbs. (669 kg.)
 NMMMA Certified
Draft: A. Drive Unit Up 16½" (.42 m.)
B. Drive Unit Down 31½" (.80 m.)

Standard Features

AM/FM/CD stereo w/4 chrome speakers
 Glove box
 Automatic bilge pump
 Ski locker
 Ski tow ring
 Tilt steering wheel
 Bow filler cushion
 Unitized fiberglass deck/floor
 Stainless steel bow & stern eyes
 Extended swim platform w/3-step ladder
 Rear U-shaped seating
 Walk-thru transom boarding gate
 Two-tone deck & hull graphics
 Suspension/Aire wraparound bucket seats w/flip-up bolsters
 Passenger grab handles

Optional Features

Convenience Package: hour meter & depth sounder
 Flip-up bucket seat (1 or 2)
 Sirius satellite radio
 Wakeboard tower
 Low profile black windshield
 Snap-in carpet
 High altitude propeller
 XL Package: convenience package, flip-up bucket helm seat, snap-in carpet, pull-up cleats, chrome speaker covers, stainless steel drink holders & stainless steel rubrail

Optional Canvas

Bimini top & boot
 Bow cover
 Bimini top for wakeboard tower
 Bimini top & boot for low profile windshield
 Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain
 Cockpit cover
 Mooring cover

(All canvas choices except mooring cover are color-coordinated Sunbrella fabric)

Color Choices

White/Black
 White/Blue
 White/Red
 White/Yellow

Engine Choices

5.0L MerCruiser (220 hp)
 5.0L MPI MerCruiser (260 hp)
 5.7L MerCruiser (250 hp)
 350 Magnum MPI MerCruiser (300 hp)
 350 Magnum MPI Bravo I MerCruiser (300 hp)
 5.0 GL Volvo Penta (220 hp)
 5.0 GXi Volvo Penta (270 hp)
 5.7 Gi Volvo Penta (280 hp)
 5.7 GXi Volvo Penta (320 hp)

Performance

Engine: 5.0 GL Volvo Penta, Prop: 19 pitch (with wakeboard tower)

RPM	MPH	GPH	RANGE*
2000	9	3.9	73
3000	29	6.8	134
4000	40	9.5	133
WOT	49-51	—	—

Time to plane: 2.7 seconds
 Acceleration 0-20 MPH: 4.4 seconds

Engine: 5.0 GXi Volvo Penta, Prop: 19 pitch

RPM	MPH	GPH	RANGE*
2000	9	3.7	77
3000	28	6.4	137
4000	39	11.4	109
WOT	51-53	—	—

Time to plane: 2.9 sec.
 Acceleration 0-20 MPH: 4.3 seconds

Engine: 5.0L MPI MerCruiser, Prop: 21 pitch

RPM	MPH	GPH	RANGE*
2000	9	4.4	64
3000	29	8.4	109
4000	35	13.2	84
WOT	48-50	—	—

Time to plane: 2.9 sec.
 Acceleration 0-20 MPH: 6.8 seconds

* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Performance data is measured with two passengers, ¾ to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

GT 185

Ski & Fish



Specifications

Length w/swim platform 18'5" (5.61 m.)	Transom Deadrise 21°
Beam 88" (2.24 m.)	Transom Width 86" (2.18 m.)
Depth 44" (1.12 m.)	LOA on Trailer 21' 10" (6.65 m.)
Maximum Depth 59" (1.50 m.)	Fuel Capacity 23 gal. (87 L.)
Cockpit Depth 28½" (.73 m.)	Maximum Load 1150 lbs. (522 kg.)
Approx. Wt. 2335 lbs. (1059 kg.)	Max. Persons 8 or 1150 lbs. (522 kg.)
w/3.0 GL Volvo Penta	NMMA Certified
Draft: A. Drive Unit Up 16" (.41 m.)	
B. Drive Unit Down 31" (.79 m.)	

Standard Features

Adjustable deluxe bucket seats	Integrated bow steps
Aerated livewell	w/removable cushion
AM/FM/CD stereo w/2 speakers	Rear bench seat
Automatic bilge pump	Removable padded sunlounge
Bow instrument panel with	Ski locker
voltmeter, 12/24V trolling motor	Ski tow ring
receptacle, livewell/trim/battery	Stainless steel boarding ladder
selector switches	Stainless steel bow & stern eyes
Bow seats w/concealed storage	Swivel fishing seats for casting
Built-in tackle box trays	decks (2)
Extended swim platform	Trolling motor mount
w/3-step ladder	Two-tone deck & hull graphics
Fishing rod holders	Unitized fiberglass deck/floor
Front & rear convertible	Walk-thru curved windshield
casting decks	VEC technology
Glove box	

Optional Features

Convenience Package: hour meter & depth sounder	Sirius satellite radio
Fishing Package: trolling motor & fish finder	Snap-in carpet
Flip-up bucket seat (1 or 2)	Tilt steering wheel
Full side glass windshield	XL Package: fishing package, convenience package, snap-in carpet, tilt steering wheel, stainless steel drink holders, stainless steel rubrail & chrome speaker covers
High altitude propeller	
Low profile black windshield	

Optional Canvas

Bimini top & boot	Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain
Bimini top & boot for low profile windshield	Cockpit cover
Bow cover	Soft top & boot
	Mooring cover

(All canvas choices except mooring cover are color-coordinated Sunbrella fabric)

Color Choices

White/Black	White/Red
White/Blue	White/Yellow

Engine Choices

3.0L MerCruiser (135 hp)	3.0 GL Volvo Penta (135 hp)
4.3L MerCruiser (190 hp)	4.3 GL Volvo Penta (190 hp)

Performance

Engine: 3.0 GL Volvo Penta, Prop: 21 pitch

RPM	MPH	GPH	RANGE*
2000	10	2.1	99
3000	20	3.2	129
4000	35	7.6	95
WOT	41-43	—	—

Time to plane: 3.4 seconds

Acceleration 0-20 MPH: N/A**

Engine: 4.3 GL Volvo Penta, Prop: 23 pitch

RPM	MPH	GPH	RANGE*
2400	8	2.8	59
3000	29	4.7	128
4000	43	8.4	106
WOT	49-51	—	—

Time to plane: 3.7 seconds

Acceleration 0-20 MPH: 6.1 seconds

Engine: 4.3L MerCruiser, Prop: 23 pitch

RPM	MPH	GPH	RANGE*
2400	15	3.0	104
3200	35	5.0	145
4000	45	8.5	110
WOT	48-50	—	—

Time to plane: 3.5 seconds

Acceleration 0-20 MPH: N/A**

* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

** Not available.

Performance data is measured with two passengers, ¾ to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.



Specifications

Length w/swim platform 20' 8" (6.30 m.)
Beam 92" (2.33 m.)
Depth 43" (1.09 m.)
Maximum Depth 56" (1.42 m.)
Cockpit Depth 29" (.74 m.)
Approx. Wt. 2780 lbs. (1260 kg.)
 w/4.3 GL Volvo Penta

Transom Deadrise 21°
Transom Width N/A
LOA on Trailer 24' 6" (7.46 m.)
Fuel Capacity 35 gal. (132 L.)
Maximum Load 1275 lbs. (578 kg.)
Max. Persons 9 or 1275 lbs. (578 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 16½" (.42 m.)
B. Drive Unit Down 31½" (.80 m.)

Standard Features

Adjustable deluxe bucket seats
 Aerated livewell
 AM/FM/CD stereo w/2 speakers
 Automatic bilge pump
 Bow instrument panel with voltmeter, 12/24V trolling motor receptacle, livewell/trim/battery selector switches
 Bow seating w/concealed storage compartments
 Built-in tackle box trays
 Extended swim platform w/3-step ladder
 Fishing rod holders

Front & rear convertible casting decks
 Glove box
 Rear bench seat
 Removable padded sunlounge
 Ski locker
 Ski tow ring
 Stainless steel bow & stern eyes
 Swivel fishing seats for casting decks (2)
 Trolling motor mount
 Two-tone deck & hull graphics
 Unitized fiberglass deck/floor
 Walk-thru curved windshield
 VEC technology

Optional Features

Convenience Package: hour meter & depth sounder
 Fishing Package: trolling motor & fish finder
 Flip-up bucket seat (1 or 2)
 Full side glass windshield
 High altitude propeller
 Low profile black windshield

Sirius satellite radio
 Snap-in carpet
 Tilt steering wheel
 XL Package: fishing package, convenience package, snap-in carpet, tilt steering wheel, stainless steel drink holders, stainless steel rubrail & chrome speaker covers

Optional Canvas

Bimini top & boot
 Bimini top & boot for low profile windshield
 Bow cover

Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain
 Cockpit cover
 Soft top & boot
 Mooring cover

(All canvas choices except mooring cover are color-coordinated Sunbrella fabric)

Color Choices

White/Black
 White/Blue
 White/Red
 White/Yellow

Engine Choices

3.0L MerCruiser (135 hp)
 4.3L MerCruiser (190 hp)
 4.3L MPI MerCruiser (220 hp)
 5.0L MerCruiser (220 hp)
 5.0L MPI MerCruiser (260 hp)

3.0 GL Volvo Penta (135 hp)
 4.3 GL Volvo Penta (190 hp)
 4.3 GXi Volvo Penta (225 hp)
 5.0 GL Volvo Penta (220 hp)
 5.0 GXi Volvo Penta (270 hp)

Performance

Engine: 4.3L MerCruiser, Prop: 23 pitch

RPM	MPH	GPH	RANGE*
2000	15	2.8	169
3000	25	3.8	207
4000	35	6.9	160
WOT	45-48	—	—

Time to plane: 3.5 seconds
 Acceleration 0-20 MPH: N/A**

Engine: 5.0 GL Volvo Penta, Prop: 21 pitch

RPM	MPH	GPH	RANGE*
2000	9	3.6	79
3000	30	8.7	109
4000	43	10.2	133
WOT	50-52	—	—

Time to plane: 3.0 seconds
 Acceleration 0-20 MPH: 5.4 seconds

Engine: 5.0 GXi Volvo Penta, Prop: 21 pitch

RPM	MPH	GPH	RANGE*
2000	13	3.6	114
3000	31	6.5	149
4000	45	11.0	130
WOT	52-55	—	—

Time to plane: 3.4 sec.
 Acceleration 0-20 MPH: N/A**

* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

** Not available.

Performance data is measured with two passengers, ¾ to full tank of fuel, at altitudes of 0 to 1200 feet.
 Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.



Specifications

Length 19' 11" (6.07 m.)
Beam 96" (2.44 m.)
Depth 45 3/4" (1.16 m.)
Maximum Depth 56 3/4" (1.44 m.)
Cockpit Depth 32" (.81 m.)
Approx. Wt. 3025 lbs. (1372 kg.)
 w/5.0 GL Volvo Penta

Transom Deadrise 21°
Transom Width 92" (2.34 m.)
LOA on Trailer 24' 9" (7.54 m.)
Fuel Capacity 35 gal. (132 L.)
Maximum Load 1475 lbs. (669 kg.)
Max. Persons 10 or 1475 lbs. (669 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 16 1/2" (.42 m.)
 B. Drive Unit Down 31 1/2" (.80 m.)

Standard Features

AM/FM/CD stereo w/4 chrome speakers
 Automatic bilge pump
 Cockpit courtesy lights
 Depth sounder
 Glove box
 Hour meter
 Integrated swim platform
 Padded sunlounge
 Rear bench seat
 Ski locker

Ski tow ring
 Snap-in carpet
 Stainless steel drink holders
 Stainless steel grab handles
 Stainless steel rubrail
 Suspension/Aire wraparound bucket seats with flip-up bolsters
 Telescopic 3-step boarding ladder
 Tilt steering wheel
 Unitized fiberglass deck/floor
 VEC technology

Optional Features

Captain's Call (electric) w/Corsa Quick & Quiet II
 Docking lights
 Extended swim platform
 High altitude propeller
 Low profile black windshield
 Sirius satellite radio

Stereo remote for dash
 Upgrade Package: docking lights, pull-up cleats, transom-mounted stereo remote & tilt/trim switch
 U-shaped rear seating w/filler cushions
 Wakeboard tower

Optional Canvas

Bimini top & boot
 Bimini top for wakeboard tower
 Bimini top & boot for low profile windshield
 Bow cover
 Cockpit cover

Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain
 Soft top & boot
 Mooring cover
 Mooring cover w/extended swim platform

(All canvas choices except mooring cover are color-coordinated Sunbrella fabric)

Color Choices

White/Black
 White/Blue Metallic
 White/Red Metallic
 White/Yellow

Engine Choices

5.0L MerCruiser (220 hp)
 5.0L MPI MerCruiser (260 hp)
 5.7L MerCruiser (250 hp)
 5.7L Bravo III MerCruiser (250)
 350 Magnum MPI Alpha MerCruiser (300)

5.0 GL Volvo Penta (220 hp)
 5.0 GXi Volvo Penta (270 hp)
 5.7 Gi Volvo Penta (280 hp)
 5.7 GXi Volvo Penta (320 hp)

Performance

Engine: 4.3 GL Volvo Penta, Prop: 21 pitch

RPM	MPH	GPH	RANGE*
2000	15	2.8	169
3000	25	3.8	207
4000	45	6.9	160
WOT	45-47	—	—

Time to plane: 3.4 seconds
 Acceleration 0-20 MPH: N/A**

Engine: 5.0 GL Volvo Penta, Prop: 21 pitch

RPM	MPH	GPH	RANGE*
2000	12	4.1	85
3000	31	7.1	142
4000	45	8.8	143
WOT	52-54	—	—

Time to plane: 2.4 seconds
 Acceleration 0-20 MPH: 4.3 seconds

Engine: 5.7L MerCruiser, Prop: 21 pitch

RPM	MPH	GPH	RANGE*
2200	15	3.3	143
2800	35	4.3	183
3500	40	8.0	158
WOT	53-56	—	—

Time to plane: 3.1 seconds
 Acceleration 0-20 MPH: N/A**

* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

** Not available.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet. Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.



Specifications

Length 18' (5.49 m.)	Transom Deadrise 21°
Beam 91" (2.31 m.)	Transom Width 86" (2.18 m.)
Depth 43" (1.09 m.)	LOA on Trailer 22' 4" (6.81 m.)
Maximum Depth 53" (1.35 m.)	Fuel Capacity 29 gal. (110 L.)
Cockpit Depth 29½" (.75 m.)	Maximum Load 1200 lbs. (544 kg.)
Approx. Wt. 2730 lbs. (1240 kg.)	Max. Persons 8 or 1200 lbs. (544 kg.)
w/4.3 GL Volvo Penta	NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.)
B. Drive Unit Down 29" (.74 m.)

Standard Features

AM/FM/CD stereo w/4 chrome speaker covers	Stainless steel bow & stern eyes
Automatic bilge pump	Stainless steel passenger grab handles
Carry-on cooler	Stainless steel drink holders
Cockpit courtesy lights	SuspensionAire wraparound bucket seats w/flip-up bolsters
Glove box	Telescopic 3-step boarding ladder
Integrated swim platform	Tilt steering wheel
Padded sunlounge	Two-tone deck & hull graphics
Rear bench seat	Unitized fiberglass deck/floor
Sculpted snap-in carpet	Walk-thru curved windshield w/full side glass
Ski locker	VEC technology
Ski tow ring	

Optional Features

Convenience Package: hour meter & depth sounder	Sirius satellite radio
Dash-mounted stereo remote	Upgrade Package: docking lights, pull-up cleats, transom-mounted stereo remote & tilt/trim switch
Extended swim platform	Wakeboard tower
High altitude propeller	
Low profile black windshield	

Optional Canvas

Bimini top & boot	Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain
Bimini top for wakeboard tower	Soft top & boot
Bimini top & boot for low profile windshield	Mooring cover
Bow cover	Mooring cover w/extended swim platform
Cockpit cover	

(All canvas choices except mooring cover are color-coordinated Sunbrella fabric)

Color Choices

White/Black	White/Red Metallic
White/Blue Metallic	White/Yellow

Engine Choices

3.0L MerCruiser (135 hp)	3.0 GL Volvo Penta (135 hp)
4.3L MerCruiser (190 hp)	4.3 GL Volvo Penta (190 hp)
4.3L MPI MerCruiser (220 hp)	4.3 GXi Volvo Penta (225 hp)

Performance

Engine: 3.0L MerCruiser, Prop: 19 pitch

RPM	MPH	GPH	RANGE*
2100	15	2.5	159
2900	25	3.5	186
3500	35	7.4	123
WOT	42-44	—	—

Time to plane: 3.4 seconds
 Acceleration 0-20 MPH: N/A**

Engine: 4.3 GL Volvo Penta, Prop: 21 pitch

RPM	MPH	GPH	RANGE*
2000	9	3.8	62
3000	26	4.7	144
4000	39	10.2	100
WOT	47-49	—	—

Time to plane: 2.9 seconds
 Acceleration 0-20 MPH: 4.7 seconds

Engine: 4.3 MPI MerCruiser, Prop: 21 pitch

RPM	MPH	GPH	RANGE*
2000	10	4.0	65
3000	30	6.5	121
4000	43	11.1	101
WOT	51-53	—	—

Time to plane: 3.5 seconds
 Acceleration 0-20 MPH: N/A**

* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

** Not available.

Performance data is measured with two passengers, ¾ to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.



Specifications

Length 19' 11" (6.07 m.)
Beam 96" (2.44 m.)
Depth 45 3/4" (1.16 m.)
Maximum Depth 56 3/4" (1.44 m.)
Cockpit Depth 32" (.81 m.)
Approx. Wt. 3025 lbs. (1370 kg.)
 w/5.0 GL Volvo Penta

Transom Deadrise 21°
Transom Width 92" (2.34 m.)
LOA on Trailer 24' 9" (7.54 m.)
Fuel Capacity 35 gal. (132 L.)
Maximum Load 1475 lbs. (669 kg.)
Max. Persons 10 or 1475 lbs. (669 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 16 1/2" (.42 m.)
 B. Drive Unit Down 31 1/2" (.80 m.)

Standard Features

AM/FM/CD stereo
 w/4 chrome speaker covers
 Automatic bilge pump
 Carry-on cooler
 Cockpit courtesy lights
 Depth sounder
 Glove box
 Hour meter
 Integrated swim platform
 Padded sunlounge w/port & starboard
 storage compartments
 Pull-up cleats
 Ski locker w/mat
 Ski tow ring
 Sculpted snap-in carpet
 Stainless steel drink holders

Stainless steel bow & stern eyes
 Stainless steel passenger grab handles
 Stainless steel rubrail
 Suspension Aire wraparound bucket
 seats w/flip-up bolsters
 Telescopic 3-step boarding ladders,
 fore & aft
 Tilt steering wheel
 Two-tone deck & hull graphics
 Unitized fiberglass deck/floor
 U-shaped rear seating
 Walk-thru transom boarding gate
 Walk-thru curved windshield
 w/full side glass
 VEC technology

Optional Features

Bow filler cushion
 Docking lights
 Captain's Call (electric) w/Corsa
 Quick & Quiet II
 Dash-mounted stereo remote
 Extended swim platform
 High altitude propeller
 Low profile black windshield

Rear sundeck power lift
 Sirius satellite radio
 Stern filler cushion
 Upgrade Package: docking lights, pull-
 up cleats, transom-mounted stereo
 remote & tilt/trim switch
 Wakeboard tower

Optional Canvas

Bimini top & boot
 Bimini top for wakeboard tower
 Bimini top & boot for low profile
 windshield
 Bow cover
 Cockpit cover

Canvas Package: bow cover, walk-thru
 curtain, side curtains, stern curtain
 Soft top & boot
 Mooring cover
 Mooring cover w/extended
 swim platform

(All canvas choices except mooring cover are color-coordinated Sunbrella fabric)

Color Choices

White/Black
 White/Blue Metallic

White/Red Metallic
 White/Yellow

Engine Choices

5.0L MerCruiser (220 hp) 5.0 GL Volvo Penta (220 hp)
 5.0L MPI MerCruiser (260 hp) 5.0 GXi Volvo Penta (270 hp)
 5.7L Alpha MerCruiser (250 hp) 5.7 Gi Volvo Penta (280 hp)
 5.7L Bravo III MerCruiser (250 hp) 5.7 GXi Volvo Penta (320 hp)
 350 Magnum MPI Alpha
 MerCruiser (300 hp)

Performance

Engine: 5.0 GL Volvo Penta, Prop: 19 pitch

RPM	MPH	GPH	RANGE*
2000	12	4.1	85
3000	31	7.1	142
4000	45	8.8	143
WOT	52-54	—	—

Time to plane: 2.4 seconds
 Acceleration 0-20 MPH: 3.6 seconds

Engine: 5.7L MerCruiser, Prop: 21 pitch

RPM	MPH	GPH	RANGE*
2200	15	3.3	143
2800	25	4.3	183
3500	40	8.0	158
WOT	53-56	—	—

Time to plane: 3.1 seconds
 Acceleration 0-20 MPH: N/A**

* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

** Not available.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

Specifications

Length 23' (7.01 m.)
Beam 102" (2.59 m.)
Depth 53" (1.35 m.)
Maximum Depth 65" (1.65 m.)
Cockpit Depth 37" (.94 m.)
Approx. Wt. 3875 lbs. (1760 kg.)
 w/5.7 Gi Volvo Penta

Transom Deadrise 21°
Transom Width 98" (2.49 m.)
LOA on Trailer 25' 10" (7.87 m.)
Fuel Capacity 47 gal. (178 L.)
Maximum Load 1650 lbs. (748 kg.)
Max Persons 12 or 1650 lbs. (748 kg.)
NMMA Certified

Draft: A. Drive Unit Up 17½" (.44 m.)
B. Drive Unit Down 33" (.84 m.)

Standard Features

AM/FM/CD/Sirius satellite stereo
 w/4 chrome speaker covers
 Automatic bilge pump
 Carry-on cooler
 Cockpit courtesy lights
 Cockpit table
 Depth sounder
 Glove box
 Hour meter
 Integrated extended swim platform
 Padded sunlounge w/port & starboard
 storage compartments
 Rear sundeck power lift
 Sculpted snap-in carpet
 Ski locker

Ski tow ring
 Stainless steel bow & stern eyes
 Stainless steel drink holders
 Stainless steel passenger grab handles
 Stainless steel rubrail
 Suspension Aire wraparound bucket
 seats w/flip-up bolsters
 Telescopic 3-step boarding ladder
 Tilt steering wheel
 Two-tone deck & hull graphics
 Unitized fiberglass deck/floor
 U-shaped rear seating w/filler cushions
 Walk-thru transom boarding gate
 Walk-thru curved windshield
 w/full side glass

Optional Features

Bow filler cushion
 Captain's Call (electric) w/Corsa
 Quick & Quiet II
 Dash-mounted stereo remote
 Docking lights
 High altitude propeller

Low profile black windshield
 Upgrade Package: docking lights, pull-
 up cleats, transom-mounted stereo
 remote & tilt/trim switch
 Wakeboard tower

Optional Canvas

Bimini top & boot
 Bimini top for wakeboard tower
 Bimini top & boot for low profile
 windshield
 Bow cover

Canvas Package: bow cover, walk-thru
 curtain, side curtains, stern curtain
 Cockpit cover
 Soft top & boot
 Mooring cover

(All canvas choices except mooring cover are color-coordinated Sunbrella fabric)

Color Choices

White/Black
 White/Blue

White/Red
 White/Yellow

Engine Choices

5.0L MPI MerCruiser (260 hp)
 5.0L MPI Bravo III MerCruiser (260 hp)
 5.7L Alpha MerCruiser (250 hp)
 5.7L Bravo III MerCruiser (250 hp)
 350 Mag MPI Bravo I MerCruiser (300 hp)
 350 Mag MPI Bravo III MerCruiser (300 hp)
 MX 6.2 MPI Bravo I MerCruiser (320 hp)
 MX 6.2 MPI Bravo III MerCruiser (320 hp)

5.0 GXi Volvo Penta (270 hp)
 5.0 GXi DP Volvo Penta (270 hp)
 5.7 Gi Volvo Penta (280 hp)
 5.7 Gi DP Volvo Penta (280 hp)
 5.7 GXi Volvo Penta (320 hp)
 5.7 GXi DP Volvo Penta (320 hp)

Performance

Engine: 5.0 GXi Volvo Penta, Prop: 21 pitch

RPM	MPH	GPH	RANGE*
2000	9	4.0	97
3000	27	7.0	166
4000	38	11.7	139
WOT	49-51	—	—

Time to plane: 3.4 seconds
 Acceleration 0-20 MPH: 5.3 seconds

Engine: 5.7 Gi Volvo Penta, Prop: 19 pitch

RPM	MPH	GPH	RANGE*
2000	10	4.8	88
3000	30	8.2	155
4000	42	16.0	111
WOT	51-53	—	—

Time to plane: 3.4 seconds
 Acceleration 0-20 MPH: 4.5 seconds

Engine: 350 Magnum MPI Bravo I MerCruiser, Prop: 21 pitch

RPM	MPH	GPH	RANGE*
2000	9	4.5	85
3000	29	7.8	157
4000	43	13.3	137
WOT	50-55	—	—

Time to plane: 3.5 seconds
 Acceleration 0-20 MPH: N/A**

* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

** Not available.

Performance data is measured with two passengers,
 ¾ to full tank of fuel, at altitudes of 0 to 1200 feet.
 Actual performance will be affected by higher altitude, load,
 weather/water conditions, and optional equipment, such as
 wakeboard tower, extended swim platform and generator.

Specifications

Length 25' (7.62 m.)
Beam 102" (2.59 m.)
Depth 57½" (1.46 m.)
Maximum Depth 69½" (1.77 m.)
Cockpit Depth 37" (.94 m.)
Approx. Wt. 4675 lbs. (2120 kg.)
 w/5.7 Gi Volvo Penta

Transom Deadrise 21°
Transom Width 98" (2.49 m.)
LOA on Trailer 26' 5" (8.05 m.)
Fuel Capacity 56 gal. (212 L.)
Maximum Load 2000 lbs. (907 kg.)
Max Persons 12 or 1800 lbs. (816 kg.)
NMMA Certified

Draft: A. Drive Unit Up 18½" (.47 m.)
 B. Drive Unit Down 34" (.86 m.)

Standard Features

AM/FM/CD/Sirius satellite stereo w/4 chrome speaker covers	Ski tow ring
Automatic bilge pump	Stainless steel bow & stern eyes
Carry-on cooler	Stainless steel drink holders
Cockpit courtesy lights	Stainless steel passenger grab handles
Cockpit table	Stainless steel rubrail
Dash-mounted stereo remote	Suspension Aire wraparound bucket seats w/flip-up bolsters
Depth sounder	Telescopic 3-step boarding ladders, fore & aft
Enclosed head compartment w/porta-pottie	Tilt steering wheel
Hour meter	Two-tone deck & hull graphics
Integrated extended swim platform	Unitized fiberglass deck/floor
Padded sunlounge w/port & starboard storage compartments	U-shaped rear seating w/filler cushions
Rear sundeck power lift	Walk-thru transom boarding gate
Sculpted snap-in carpet	Walk-thru curved windshield w/full side glass
Ski locker	

Optional Features

Bow filler cushion	High altitude propeller
Captain's Call (electric) w/Corsa Quick & Quiet II	Upgrade Package: docking lights, pull- up cleats, transom-mounted stereo remote & tilt/trim switch
Docking lights	

Optional Canvas

Bimini top & boot	Cockpit cover
Bow cover	Soft top & boot
Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain	Mooring cover

(All canvas choices except mooring cover are color-coordinated Sunbrella fabric)

Color Choices

White/Black	White/Red
White/Blue	White/Yellow

Engine Choices

5.7L Alpha MerCruiser (250 hp)	5.0 GXi Volvo Penta (270 hp)
5.7L Bravo III MerCruiser (250 hp)	5.0 GXi DP Volvo Penta (270 hp)
350 Mag MPI Bravo I MerCruiser (300 hp)	5.7 Gi Volvo Penta (280 hp)
350 Mag MPI Bravo III MerCruiser (300 hp)	5.7 Gi DP Volvo Penta (280 hp)
MX 6.2 MPI Bravo I MerCruiser (320 hp)	5.7 GXi Volvo Penta (320 hp)
MX 6.2 MPI Bravo III MerCruiser (320 hp)	5.7 GXi DP Volvo Penta (320 hp)
496 Mag MPI Bravo I MerCruiser (375 hp)	5.7 OSXi DP (FWC) Volvo Penta (320 hp)
496 Mag MPI Bravo III MerCruiser (375 hp)	8.1 Gi DP Volvo Penta (375 hp)
496 Mag HO Bravo III MerCruiser (425 hp)	

Performance

Engine: 5.7 Gi DP Volvo Penta, Props: F4 SS

RPM	MPH	GPH	RANGE*
2000	12	4.2	144
3000	26	7.0	187
4000	36	11.3	161
WOT	45-47	—	—

Time to plane: 2.8 seconds
 Acceleration 0-20 MPH: 3.8 seconds

Engine: 350 Magnum MPI Bravo III MerCruiser, Prop: 24 pitch

RPM	MPH	GPH	RANGE*
2000	11	4.4	126
3000	26	6.9	190
4000	38	12.2	157
WOT	48-50	—	—

Time to plane: 3.0 seconds
 Acceleration 0-20 MPH: 5.1 seconds

Engine: 496 Magnum MPI Bravo III MerCruiser, Prop: 28 pitch uncapped

RPM	MPH	GPH	RANGE*
2000	15	6.2	122
3000	33	10.5	158
4000	47	18.0	132
WOT	57-59	—	—

Time to plane: 3.0 seconds
 Acceleration 0-20 MPH: N/A**

* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

** Not available.

Performance data is measured with two passengers,
 ¾ to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load,
 weather/water conditions, and optional equipment, such as
 wakeboard tower, extended swim platform and generator.



Specifications

Length 18' (5.49 m.)
Beam 91" (2.31 m.)
Depth 43" (1.09 m.)
Maximum Depth 53" (1.35 m.)
Cockpit Depth 29½" (.75 m.)
Approx. Wt. 1720 lbs. (780 kg.)
 w/o engine
Transom Width 86" (2.18 m.)
Transom Deadrise 21°
LOA on Trailer 22' 2" (6.76 m.)
Fuel Capacity 29 gal. (110 L.)
Maximum Load 1880 lbs. (853 kg.)
Max. Persons 8 or 1225 lbs. (556 kg.)
Max. Horsepower 150 (112 kw.)
 NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.)
 B. Drive Unit Down 29" (.74 m.)

Standard Features

Aerated livewell
 AM/FM/CD stereo w/4 chrome speaker covers
 Bow instrument panel with voltmeter, 12/24V trolling motor receptacle, livewell/trim/battery selector switches
 Bilge pump
 Built-in tackle box trays
 Carry-on cooler
 Cockpit courtesy lights
 Dual cable steering
 Fishing rod holders
 Glove box
 Integrated swim platform
 Rear bench seat

Removable padded sunlounge
 Ski locker
 Snap-in carpet
 Stainless steel drink holders
 Stainless steel grab handles
 Stainless steel rubrail
 Suspension Aire wraparound bucket seats w/flip-up bolsters
 Swivel fishing seats for casting platforms (2)
 Telescopic 3-step boarding ladder
 Tilt steering wheel
 Trolling motor mount
 Uitized fiberglass deck/floor
 VEC technology

Optional Features

Convenience Package: hour meter, depth sounder, automatic bilge pump
 Dash-mounted stereo remote

Fishing Package: trolling motor & fish finder
 Full side glass windshield
 Sirius satellite radio
 Ski tow pylon

Optional Canvas

Bimini top & boot
 Bow cover
 Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain

Cockpit cover
 Soft top & boot
 Mooring cover

(All canvas choices except mooring cover are color-coordinated Sunbrella fabric)

Color Choices

White/Black
 White/Blue Metallic

White/Red Metallic
 White/Yellow

Engine Choices

Evinrude 115 DSLS
 Evinrude 150 DSLS
 Yamaha 115 TLR
 Yamaha F 115 TLR
 Yamaha 150 TLR
 Yamaha F 150 TLR

Mercury 90 ELPT EFI FourStroke
 Mercury 115 ELPT EFI Optimax
 Mercury 115 ELPT EFI FourStroke
 Mercury 135 L Optimax
 Mercury 150 L Optimax

Performance

Engine: Evinrude E-TEC 150, Prop 19 pitch

RPM	MPH	GPH	RANGE*
2000	9	N/A**	N/A**
3000	24	N/A**	N/A**
4000	34	N/A**	N/A**
WOT	47-49	—	—

Time to plane: 3.4 seconds
 Acceleration 0-20 MPH: N/A**

* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

** Not available.

Performance data is measured with two passengers, ¾ to full tank of fuel, at altitudes of 0 to 1200 feet. Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.



Specifications

Length 18' (5.49 m.)
Beam 91" (2.31 m.)
Depth 43" (1.09 m.)
Maximum Depth 53" (1.35 m.)
Cockpit Depth 29 1/2" (.75 m.)
Approx. Wt. 2740 lbs. (1243 kg.)
 w/4.3 GL Volvo Penta

Transom Deadrise 21°
Transom Width 86" (2.18 m.)
LOA on Trailer 22' 4" (6.81 m.)
Fuel Capacity 29 gal. (110 L.)
Maximum Load 1200 lbs. (544 kg.)
Max. Persons 8 or 1200 lbs. (544 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.)
B. Drive Unit Down 31" (.79 m.)

Standard Features

Aerated livewell	Removable padded sunlounge
AM/FM/CD stereo w/4 chrome speaker covers	Ski locker
Automatic bilge pump	Ski tow ring
Bow instrument panel with voltmeter, 12/24V trolling motor receptacle, livewell/trim/battery selector switches	Snap-in carpet
Built-in tackle box trays	Stainless steel drink holders
Carry-on cooler	Stainless steel grab handles
Cockpit courtesy lights	Stainless steel rubrail
Fishing rod holders	Suspension Aire wraparound bucket seats w/flip-up bolsters
Front & rear convertible casting decks	Swivel fishing seats for casting platforms (2)
Glove box	Telescopic 3-step boarding ladder
Integrated swim platform	Tilt steering wheel
Rear bench seat	Trolling motor mount
	Unitized fiberglass deck/floor
	VEC technology

Optional Features

Convenience Package: hour meter & depth sounder	Fishing Package: trolling motor & fish finder
Dash-mounted stereo remote	High altitude propeller
Extended swim platform	Sirius satellite radio
Full side glass windshield	

Optional Canvas

Bimini top & boot	Soft top & boot
Bow cover	Mooring cover
Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain	Mooring cover w/extended swim platform
Cockpit cover	

(All canvas choices except mooring cover are color-coordinated Sunbrella fabric)

Color Choices

White/Black	White/Red Metallic
White/Blue Metallic	White/Yellow

Engine Choices

3.0L MerCruiser (135 hp)	3.0 GL Volvo Penta (135 hp)
4.3L MerCruiser (190 hp)	4.3 GL Volvo Penta (190 hp)
4.3L MPI MerCruiser (220 hp)	4.3 GXi Volvo Penta (225 hp)

Performance

Engine: 3.0L MerCruiser, Prop: 19 pitch

RPM	MPH	GPH	RANGE*
2100	15	2.5	157
2900	25	3.5	186
3500	35	7.4	123
WOT	42-44	—	—

Time to plane: 3.4 seconds
 Acceleration 0-20 MPH: N/A**

Engine: 3.0 GL Volvo Penta, Prop: 19 pitch

RPM	MPH	GPH	RANGE*
2000	10	2.1	124
3000	20	3.2	163
4000	35	7.6	120
WOT	41-43	—	—

Time to plane: 3.7 seconds
 Acceleration 0-20 MPH: N/A**

Engine: 4.3 GL Volvo Penta, Prop: 21 pitch

RPM	MPH	GPH	RANGE*
2000	9	3.8	62
3000	26	4.7	144
4000	39	10.2	100
WOT	47-49	—	—

Time to plane: 3.1 seconds
 Acceleration 0-20 MPH: 6.2 seconds

* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

** Not available.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.



Specifications

Length 19' 11" (6.07 m.)
Beam 96" (2.44 m.)
Depth 45 3/4" (1.16 m.)
Maximum Depth 56 3/4" (1.44 m.)
Cockpit Depth 32" (.81 m.)
Approx. Wt. 3075 lbs. (1395 kg.)
 w/5.0 GL Volvo Penta

Transom Deadrise 21°
Transom Width 92" (2.34 m.)
LOA on Trailer 24' 9" (7.54 m.)
Fuel Capacity 35 gal. (132 L.)
Maximum Load 1475 lbs. (669 kg.)
Max. Persons 10 or 1475 lbs. (669 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 16 1/2" (.42 m.)
B. Drive Unit Down 31 1/2" (.80 m.)

Standard Features

Aerated livewell
 AM/FM/CD stereo w/4 chrome speaker covers
 Automatic bilge pump
 Bow instrument panel with voltmeter, 12/24V trolling motor receptacle, livewell/trim/battery selector switches
 Built-in tackle box trays
 Carry-on cooler
 Cockpit courtesy lights
 Fishing rod holders
 Front & rear convertible casting decks
 Glove box
 Integrated swim platform
 Rear bench seat
 Removable padded sunlounge

Ski locker
 Ski tow ring
 Snap-in carpet
 Stainless steel bow & stern eyes
 Stainless steel drink holders
 Stainless steel grab handles
 Stainless steel rubrail
 SuspensionAire wraparound bucket seats w/flip-up bolsters
 Swivel fishing seats for casting platforms (2)
 Telescopic 3-step boarding ladder
 Tilt steering wheel
 Trolling motor mount
 Unitized fiberglass deck/floor
 VEC technology

Optional Features

Convenience Package: hour meter & depth sounder
 Extended swim platform
 Fishing Package: trolling motor & fish finder

Full side glass windshield - Opt.
 High altitude propeller
 Sirius satellite radio
 Stereo remote for dash

Optional Canvas

Bimini top & boot
 Bow cover
 Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain
 Cockpit cover

Soft top & boot
 Mooring cover
 Mooring cover w/extended swim platform

(All canvas choices except mooring cover are color-coordinated Sunbrella fabric)

Color Choices

White/Black
 White/Blue Metallic
 White/Red Metallic
 White/Yellow

Engine Choices

4.3L MerCruiser (190 hp)
 4.3L MPI MerCruiser (220 hp)
 4.3L MPI Bravo III MerCruiser (220 hp)
 5.0L MerCruiser (220 hp)
 5.0L MPI MerCruiser (260 hp)
 5.7L Alpha MerCruiser (250 hp)
 5.7L Bravo III MerCruiser (250 hp)
 350 Mag MPI Alpha MerCruiser (300 hp)
 350 Mag MPI Bravo I MerCruiser (300 hp)

4.3 GL Volvo Penta (190 hp)
 4.3 GXi Volvo Penta (225 hp)
 4.3 GXi DP Volvo Penta (225 hp)
 5.0 GL Volvo Penta (220 hp)
 5.0 GXi Volvo Penta (270 hp)
 5.7 Gi Volvo Penta (280 hp)

Performance

Engine: 5.0 GL Volvo Penta, Prop: 19 pitch

RPM	MPH	GPH	RANGE*
2000	11	5.0	69
3000	32	7.9	127
3500	38	9.0	133
WOT	51-53	—	—

Time to plane: 3.0 seconds
 Acceleration 0-20 MPH: 4.2 seconds

Engine: 5.7L MerCruiser, Prop: 21 pitch

RPM	MPH	GPH	RANGE*
2200	15	3.3	143
2800	25	4.3	183
3500	38	9.2	130
WOT	52-54	—	—

Time to plane: 3.1 seconds
 Acceleration 0-20 MPH: N/A**

* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

** Not available.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet. Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

Specifications

Length 20' 1" (6.12 m.)
Beam 102" (2.59 m.)
Depth 50½" (1.28 m.)
Maximum Depth 59" (1.50 m.)
Cockpit Depth 35" (.89 m.)
Approx. Wt. 2930 lbs. (1330 kg.)
 w/4.3 GL Volvo Penta

Transom Deadrise 17°
Transom Width 94" (2.39 m.)
LOA on Trailer 25' 3" (7.70 m.)
Fuel Capacity 50 gal. (189 L.)
Maximum Load 1400 lbs. (635 kg.)
Max. Persons 10 or 1400 lbs. (635 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 13" (.33 m.)
B. Drive Unit Down 28" (.71 m.)

Standard Features

Aerated livewell
 AM/FM/CD/Sirius satellite stereo
 w/2 chrome speaker covers
 Automatic bilge pump
 Carry-on cooler
 Cockpit courtesy lights
 Color-coordinated Sunbrella Bimini
 top w/boot
 Depth sounder
 Fishing rod holders
 Hour meter
 Integrated fore & aft swim/fishing
 platforms
 Removable padded sunlounge
 Ski locker
 Ski tow ring

Skid-resistant fiberglass floor
 Snap-in carpet
 Stainless steel bow & stern eyes
 Stainless steel drink holders
 Stainless steel boarding ladder
 Stainless steel grab handles
 Stainless steel rubrail
 Stowaway fishing seat
 Suspension Aire wraparound bucket
 helm seat w/flip-up bolster
 Tilt steering wheel
 Transom & dockside boarding
 Trolling motor plug
 Walk-thru transom w/gate
 Wraparound bow seating w/storage

Optional Features

Bow table w/floor mount
 Extended swim platform

High altitude propeller
 Second fishing seat & pedestal

Optional Canvas

Cockpit/bow cover

Color Choices

White/Black
 White/Blue

White/Red
 White/Yellow

Engine Choices

4.3L MerCruiser (190 hp)
 4.3L MPI MerCruiser (220 hp)
 5.0L MerCruiser (220 hp)
 5.0L MPI MerCruiser (260 hp)

4.3 GL Volvo Penta (190 hp)
 4.3 GXi Volvo Penta (225 hp)
 5.0 GL Volvo Penta (220 hp)
 5.0 GXi Volvo Penta (270 hp)

Performance

Engine: 4.3 GL Volvo Penta, Prop: 21 pitch

RPM	MPH	GPH	RANGE*
2500	21	4.8	197
3500	35	8.2	192
4500	41	14.8	125
WOT	47-50	—	—

Time to plane: N/A**
 Acceleration 0-20 MPH: N/A**

Engine: 5.0 GL Volvo Penta, Prop: 21 pitch

RPM	MPH	GPH	RANGE*
2000	12	4.1	85
3000	31	7.1	142
4000	45	8.8	143
WOT	52-54	—	—

Time to plane: 2.7 seconds
 Acceleration 0-20 MPH: 4.5 seconds

* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

** Not available.

Performance data is measured with two passengers, ¾ to full tank of fuel, at altitudes of 0 to 1200 feet. Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

Specifications

Length 20' 11" (6.38 m.)
Beam 102" (2.59 m.)
Depth 57½" (1.46 m.)
Maximum Depth N/A
Cockpit Depth 28½" (.72 m.)
Approx. Wt. 3670 lbs. (1665 kg.)
 w/5.0 GXi Volvo Penta

Transom Deadrise 16°
Transom Width 96" (2.44 m.)
LOA on Trailer 23' 9" (7.24 m.)
Fuel Capacity 56 gal. (212 L.)
Maximum Load 1900 lbs. (862 kg.)
Max. Persons 13 or 1800 lbs. (816 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 14" (.36 m.)
B. Drive Unit Down 30" (.76 m.)

Standard Features

AM/FM/CD/Sirius satellite stereo w/4 chrome speaker covers	Refreshment console w/sink Ski locker
Automatic bilge pump	Ski tow ring
Bow anchor locker	Skid-resistant fiberglass floor
Carry-on cooler	Snap-in carpet
Cockpit courtesy lights	Stainless steel bow & stern eyes
Color-coordinated Sunbrella Bimini top w/boot	Stainless steel drink holders
Concealed telescopic	Stainless steel grab handles
3-step boarding ladders, fore & aft	Stainless steel rubrail
Depth sounder	SuspensionAire wraparound bucket helm seat w/flip-up bolster
Head compartment	Tilt steering wheel
Hour meter	Transom & dockside boarding
Integrated fore & aft swim platforms	Wraparound bow seating w/storage
Padded sunlounge	

Optional Features

Bow filler cushions	Fishing Package: livewell with dash switch, 2 bow fishing seats & pedestals, bow trolling motor plug
Compass	High altitude propeller
Docking lights	Porta-pottie
Extended swim platform	Table w/bow & aft floor mounts

Optional Canvas

Cockpit/bow cover

Color Choices

White/Black	White/Red
White/Blue	White/Yellow

Engine Choices

4.3L MerCruiser (190 hp)	4.3 GL Volvo Penta (190 hp)
4.3L MPI MerCruiser (220 hp)	4.3 GXi Volvo Penta (225 hp)
4.3L MPI Bravo III MerCruiser (220 hp)	4.3 GXi DP Volvo Penta (225 hp)
5.0L MerCruiser (220 hp)	5.0 GL Volvo Penta (220 hp)
5.0L MPI MerCruiser (260 hp)	5.0 GXi Volvo Penta (270 hp)
5.7L Alpha MerCruiser (250 hp)	5.7 Gi Volvo Penta (280 hp)
5.7L Bravo III MerCruiser (250 hp)	
350 Mag MPI Alpha MerCruiser (300 hp)	

Performance

Engine: 5.0 GXi Volvo Penta, Prop: 21 pitch

RPM	MPH	GPH	RANGE*
2000	9	4.2	108
3000	28	7.4	191
4000	40	12.5	161
WOT	49-51	—	—

Time to plane: 3.0 seconds
 Acceleration 0-20 MPH: 5.4 seconds

Engine: 5.0L MerCruiser, Prop: N/A

RPM	MPH	GPH	RANGE*
2000	9	4.1	111
3000	27	6.9	197
4000	38	12.6	152
WOT	44-46	—	—

Time to plane: 3.9 seconds
 Acceleration 0-20 MPH: N/A**

Engine: Engine: 5.0L MPI MerCruiser, Prop: 19 pitch

RPM	MPH	GPH	RANGE*
2000	9	3.8	119
3000	27	7.0	194
4000	39	11.4	172
WOT	47-49	—	—

Time to plane: 4.3 seconds
 Acceleration 0-20 MPH: N/A**

* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

** Not available.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet. Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

Specifications

Length 20' 11" (6.38 m.)	Transom Deadrise 16°
Beam 102" (2.59 m.)	Transom Width 98" (2.49 m.)
Depth 57½" (1.46 m.)	LOA on Trailer 23' 9" (7.24 m.)
Maximum Depth 66½" (1.69 m.)	Fuel Capacity 56 gal. (212 L.)
Cockpit Depth 28½" (.72 m.)	Maximum Load 1800 lbs. (816 kg.)
Approx. Wt. 3930 lbs. (1783 kg.) w/5.0 GXi Volvo Penta	Max. Persons 10 or 1600 lbs. (726 kg.) NMMA Certified
Draft: A. Drive Unit Up 14" (.36 m.)	
B. Drive Unit Down 30" (.76 m.)	

Standard Features

AM/FM/CD/Sirius satellite stereo w/4 chrome speaker covers	Rear bench seat
Anchor locker	Ski locker
Automatic bilge pump	Ski tow ring
Bow filler cushions	Snap-in carpet
Bow seating w/concealed storage	Stainless steel bow & stern eyes
Carry-on cooler	Stainless steel drink holders
Cockpit courtesy lights	Stainless steel grab handles
Color-coordinated Sunbrella Bimini top w/boot	Stainless steel rubrail
Depth sounder	Stainless steel telescopic boarding ladders, fore & aft
Docking lights	SuspensionAire adjustable bucket seats w/flip-up bolsters
Enclosed head compartment	Tilt steering wheel
Hour meter	Transom & dockside boarding
Padded sunlounge	Walk-thru curved windshield

Optional Features

Bow table	Pull-up cleats
Extended swim platform	Porta-pottie
High altitude propeller	

Optional Canvas

Bow cover	Canvas Package for Bimini top:
Cockpit cover	side curtains, aft curtain & clear connector

Color Choices

White/Black	White/Red
White/Blue	White/Yellow

Engine Choices

5.0L MerCruiser (220 hp)	5.0 GL Volvo Penta (220 hp)
5.0L MPI MerCruiser (260 hp)	5.0 GXi Volvo Penta (270 hp)
5.7L Alpha MerCruiser (250 hp)	5.7 Gi Volvo Penta (280 hp)
5.7L Bravo III MerCruiser (250 hp)	5.7 Gi DP Volvo Penta (280 hp)
350 Mag MPI Alpha MerCruiser (300 hp)	
350 Mag MPI Bravo III MerCruiser (300 hp)	

Performance

Engine: 5.0 GL Volvo Penta, Prop: 19 pitch

RPM	MPH	GPH	RANGE*
2000	9	4.0	97
3000	27	7.0	166
4000	38	11.7	139
WOT	49-51	—	—

Time to plane: 2.3 seconds

Acceleration 0-20 MPH: 4.5 seconds

Engine: 5.0 GXi Volvo Penta, Prop: 19 pitch

RPM	MPH	GPH	RANGE*
2000	9	4.0	113
3000	26	7.2	182
4000	39	12.3	160
WOT	49-51	—	—

Time to plane: 3.6 seconds

Acceleration 0-20 MPH: N/A**

Engine: 5.7 Gi Volvo Penta, Prop: 17 pitch

RPM	MPH	GPH	RANGE*
2000	9	4.7	97
3000	28	8.2	172
4000	40	13.5	149
WOT	47-49	—	—

Time to plane: 3.1 seconds

Acceleration 0-20 MPH: 4.3 seconds

* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

** Not available.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

Specifications

Length 22' 6" (6.86 m.)
Beam 102" (2.59 m.)
Depth 60" (1.52 m.)
Maximum Depth 69" (1.75 m.)
Cockpit Depth 31" (.79 m.)
Approx. Wt. 3980 lbs. (1814 kg.)
 w/5.7 Gi Volvo Penta

Transom Deadrise 15°
Transom Width 94" (2.39 m.)
LOA on Trailer 30' 6" (9.30 m.)
Fuel Capacity 73 gal. (276 L.)
Maximum Load 1950 lbs. (885 kg.)
Max. Persons 13 or 1950 lbs. (885 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 18" (.46 m.)
B. Drive Unit Down 32" (.81 m.)

Standard Features

AM/FM/CD/Sirius satellite stereo
 w/4 chrome speaker covers
 Automatic bilge pump
 Bow anchor locker
 Bow swim platform w/concealed ladder
 Carry-on cooler
 Cockpit courtesy lights
 Cockpit/bow table
 Color-coordinated Sunbrella Bimini top w/boot
 Concealed telescopic 3-step boarding ladders, fore & aft
 Depth sounder
 Head compartment & sink w/Alpha stone countertop
 Hour meter
 Ski locker

Ski tow ring
 Skid-resistant fiberglass floor
 Snap-in carpet
 Stainless steel bow & stern eyes
 Stainless steel drink holders
 Stainless steel grab handles
 Stainless steel rubrail
 Stainless steel thru-hull fittings
 Stern extended swim platform w/concealed ladder
 SuspensionAire adjustable bucket seats w/flip-up bolster
 Tilt steering wheel
 Transom & dockside boarding
 Transom jump seat
 Wraparound bow seating w/storage

Optional Features

Bow filler cushions
 Compass
 Docking lights
 Freshwater transom shower

High altitude propeller
 Portable head w/pump-out
 Porta-pottie
 Pull-up cleats

Optional Canvas

Bow/cockpit cover

Color Choices

White/Black
 White/Blue
 White/Red
 White/Yellow

Engine Choices

5.0L MerCruiser (220 hp)
 5.0L MPI MerCruiser (260 hp)
 5.7L Alpha MerCruiser (250 hp)
 5.7L Bravo III MerCruiser (250 hp)
 350 Mag MPI Alpha MerCruiser (300 hp)
 350 Mag MPI Bravo I MerCruiser (300 hp)
 350 Mag MPI Bravo III MerCruiser (300 hp)

5.0 GL Volvo Penta (220 hp)
 5.0 GXi Volvo Penta (270 hp)
 5.7 Gi Volvo Penta (280 hp)
 5.7 Gi DP Volvo Penta (280 hp)
 5.7 GXi DP Volvo Penta (320 hp)

Performance

Engine: 5.0 GXi Volvo Penta, Prop: 19 pitch

RPM	MPH	GPH	RANGE*
2000	9	4.0	148
3000	26	7.5	228
4000	38	12.1	206
WOT	49-51	—	—

Time to plane: 4.0 seconds
 Acceleration 0-20 MPH: N/A**

Engine: 350 Magnum MPI Alpha MerCruiser, Prop: 17 pitch

RPM	MPH	GPH	RANGE*
2000	9	4.5	131
3000	25	7.0	235
4000	37	12.1	201
WOT	48-50	—	—

Time to plane: 5.0 seconds
 Acceleration 0-20 MPH: 7.5 seconds

* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

** Not available.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

Specifications

Length 20' 2" (6.15 m.)
Beam 9 1/4" (2.39 m.)
Depth 50" (1.27 m.)
Maximum Depth 71" (1.80 m.)
Cockpit Depth 35" (.89 m.)
Approx. Wt. 2832 lbs. (1285 kg.)
 w/5.0 GL Volvo Penta

Transom Deadrise 21°
Transom Width 90" (2.29 m.)
LOA on Trailer 24' 8" (7.52 m.)
Fuel Capacity 45 gal. (170 L.)
Maximum Load 1450 lbs. (658 kg.)
Max. Persons 8 or 1150 lbs. (522 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 18 1/2" (.47 m.)
 B. Drive Unit Down 33" (.84 m.)

Standard Features

Adjustable deluxe bucket seats	Helm storage locker
AM/FM/CD/stereo w/2 speakers	Integrated swim platform
Automatic bilge pump	Padded sunlounge
Bow access step	Ski tow ring
Bow anchor locker	Stainless steel bow & stern eyes
Cabin courtesy lights	Stainless steel deck rails
Color-coordinated Sunbrella soft top w/boot	Teak flooring
Deck hatch with screen	Telescopic 3-step boarding ladder
Floor storage area	Upholstered V-berth
	Walk-thru curved full glass windshield

Optional Features

Convenience Package: hour meter & depth sounder	SL Seating: twin SuspensionAire adjustable bucket seats, aft bench seat, sunlounge
Extended swim platform	XL Package: tilt steering wheel, convenience package, chrome speaker covers, stainless steel drink holders, stainless steel rubrail, stainless steel grab handles, flip-up bucket helm seat
Flip-up bucket seats (1 or 2)	
Galley Package w/standard interior	
High altitude propeller	
Porta-pottie	
Sirius satellite radio	
Tilt steering wheel	

Optional Canvas

Camper Canvas Package: Canvas Package less stern curtain, plus aft camper top, aft camper side curtains, aft camper stern curtain	Canvas Package: side curtains, stern curtain Cockpit cover Mooring cover
---	--

(All canvas choices except mooring cover are color-coordinated Sunbrella fabric)

Color Choices

Blue Gelcoat w/Blue & Yellow Graphics

Engine Choices

4.3L MerCruiser (190 hp)	4.3 GL Volvo Penta (190 hp)
4.3L MPI MerCruiser (220 hp)	4.3 GXi Volvo Penta (225 hp)
4.3L MPI Bravo III MerCruiser (220 hp)	4.3 GXi DP Volvo Penta (225 hp)
5.0L MerCruiser (220 hp)	5.0 GL Volvo Penta (220 hp)
5.0L MPI MerCruiser (260 hp)	5.0 GXi Volvo Penta (270 hp)

Performance

Engine: 4.3 GL Volvo Penta, Prop: 21 pitch

RPM	MPH	GPH	RANGE*
2000	15	4.0	152
3000	25	5.3	191
4000	35	9.0	158
WOT	43-45	—	—

Time to plane: 3.6 seconds
 Acceleration 0-20 MPH: N/A**

Engine: 5.0 GL Volvo Penta, Prop: 21 pitch

RPM	MPH	GPH	RANGE*
2000	10	N/A**	N/A**
3000	32	N/A**	N/A**
4000	45	N/A**	N/A**
WOT	49-51	—	—

Time to plane: 2.9 seconds
 Acceleration 0-20 MPH: 3.6 seconds

Engine: 5.0L MerCruiser, Prop: 21 pitch

RPM	MPH	GPH	RANGE*
2000	9	N/A**	N/A**
3000	30	N/A**	N/A**
4000	43	N/A**	N/A**
WOT	48-50	—	—

Time to plane: N/A**
 Acceleration 0-20 MPH: 6.3 seconds

* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

** Not available.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet. Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.



Specifications

Length 24' (7.31 m.)
Beam 102" (2.59 m.)
Depth 80½" (2.13 m.)
Maximum Depth 91" (2.31 m.)
Cockpit Depth 36" (.91 m.)
Approx. Wt. 4437 lbs. (2013 kg.)
 w/5.0 GL Volvo Penta

Transom Deadrise 20°
Transom Width 97" (2.46 m.)
LOA on Trailer 26'10" (8.18 m.)
Fuel Capacity 35 gal. (212 L.)
Maximum Load 2000 lbs. (907 kg.)
Max. Persons 10 or 1475 lbs. (669 kg.)
NMMA Certified

Draft: A. Drive Unit Up 17" (.43 m.)
 B. Drive Unit Down 35" (.89 m.)

Standard Features

Aft cabin
 AM/FM/CD w/4 speakers
 Automatic bilge pump
 Cabin courtesy lights
 Color-coordinated Sunbrella Bimini top w/boot
 Deck hatch w/screen
 Dinette/V-berth
 Dual battery switch
 Head compartment w/fiberglass shower, sink, porta-pottie
 Integrated swim platform w/walk-thru transom gate

L-shaped cockpit seating w/double-wide fold-down sunlounge
 Ski tow ring
 Skid-resistant fiberglass floor
 Stainless steel deck rails
 SuspensionAire adjustable bucket helm seat w/flip-up bolster
 Telescopic 3-step boarding ladder
 Tilt steering wheel
 Vented cabin windows (4)
 Water tank (18 gallons)

Optional Features

China head, manual pump-out
 China head, electric pump-out
 Convenience Package: hour meter & depth sounder
 Dash-mounted stereo remote
 Dockside AC/reverse heat
 Electric anchor windlass
 Galley package: microwave, refrigerator, alcohol/elec. stove, hot water heater, 110V dockside power, battery charger
 High altitude propeller

Hydraulic trim tabs
 Remote control spotlight/compass
 Sirius satellite radio
 Snap-in carpet
 Starboard windshield wiper
 Transom shower
 XL Package: stainless steel rubrail, stainless steel drink holders, convenience package, snap-in carpet, chrome speaker covers & stereo remote for dash

Optional Canvas

Camper Canvas Package: canvas package less stern curtain, plus aft camper top, aft camper side curtains, aft camper stern curtain
 Canvas Package for Bimini top: side curtains, aft curtain, clear connector
 Cockpit cover

(All canvas choices except mooring cover are color-coordinated Sunbrella fabric)

Color Choices

Blue Gelcoat w/Blue & Yellow Graphics

Engine Choices

5.0L MerCruiser (220 hp)	5.0 GL Volvo Penta (220 hp)
5.0L MPI MerCruiser (260 hp)	5.0 GXi Volvo Penta (270 hp)
5.7L MerCruiser (250 hp)	5.0 GXi DP Volvo Penta (270 hp)
5.7L Bravo III MerCruiser (250 hp)	5.0 OSi DP Volvo Penta (270 hp)
350 Mag MPI Bravo I MerCruiser (300 hp)	5.7 Gi Volvo Penta (280 hp)
350 Mag MPI Bravo III MerCruiser (300 hp)	5.7 Gi DP Volvo Penta (280 hp)
MX 6.2 MPI Bravo I MerCruiser (320 hp)	5.7 OSi DP Volvo Penta (280 hp)
MX 6.2 MPI Bravo III MerCruiser (320 hp)	5.7 GXi Volvo Penta (320 hp)
	5.7 GXi DP Volvo Penta (320 hp)
	5.7 OSXi DP (FWC) Volvo Penta (320 hp)

Performance

Engine: 5.0 GL Volvo Penta, Prop: 17 pitch

RPM	MPH	GPH	RANGE*
2000	9	N/A**	N/A**
3000	23	N/A**	N/A**
4000	35	N/A**	N/A**
WOT	41-43	—	—

Time to plane: 4.0 seconds
 Acceleration 0-20 MPH: 6.8 seconds

Engine: 5.0 GXi DP Volvo Penta, Props: F3

RPM	MPH	GPH	RANGE*
2000	9	4.3	106
3000	22	7.4	150
4000	33	12.1	138
WOT	43-45	—	—

Time to plane: 5.3 seconds
 Acceleration 0-20 MPH: 7.5 seconds

* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

** Not available.

Performance data is measured with two passengers, ¾ to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

GS 219

Specifications

Length 21' 6" (6.55 m.)
 Beam 102" (2.59 m.)
 Depth 62" (1.57 m.)
 Maximum Depth 72" (1.83 m.)
 Cockpit Depth 34" (.86 m.)
 Approx. Wt. 3580 lbs. (1624 kg.)
 w/5.0 GXi Volvo Penta

Transom Deadrise 21°
 Transom Width 96" (2.44 m.)
 LOA on Trailer 26' 4" (8.03 m.)
 Fuel Capacity 56 gal. (212 L.)
 Maximum Load 1500 lbs. (680 kg.)
 Max. Persons 8 or 1150 lbs. (522 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 18" (.46 m.)
 B. Drive Unit Down 36" (.91 m.)

Standard Features

AM/FM/CD/Sirius satellite stereo
 w/4 chrome speaker covers
 Automatic bilge pump
 Battery switch
 Bow anchor locker
 Cabin courtesy lights
 Carry-on cooler
 Color-coordinated Sunbrella Bimini
 top w/boot
 Dash-mounted stereo remote
 Deck hatch with screen
 Depth sounder
 Fold-down sleeper seat
 Hour meter
 Integrated swim platform

Padded sunlounge
 Porta-pottie
 Power plug (12V)
 Ski tow ring
 Skid-resistant fiberglass floor
 Snap-in carpet
 Stainless steel bow & stern eyes
 Stainless steel bow rails
 Stainless steel rubrail
 SuspensionAire adjustable bucket
 helm seat w/flip-up bolster
 Telescopic 3-step boarding ladder
 Tilt steering wheel
 Upholstered V-berth
 Walk-thru curved full glass windshield

Optional Features

Compass
 Galley Package: butane stove, sink,
 water system
 High altitude propeller
 Remote control spotlight

SL Seating: twin SuspensionAire
 adjustable bucket seats w/flip-up
 bolsters, aft bench seat/sunlounge
 w/walk-thru transom gate
 (Galley Package not available in
 this seating option)

Optional Canvas

Camper Canvas Package: Canvas
 Package less stern curtain, plus aft
 camper top, aft camper side
 curtains, aft camper stern curtain

Canvas Package for Bimini top: side
 curtains, aft curtain & clear connector
 Cockpit cover
 Mooring cover

(All canvas choices except mooring cover are color-coordinated Sunbrella fabric)

Color Choices

White w/Black Gelcoat & Graphics Package
 White w/Blue Gelcoat & Graphics Package
 White w/Sand Gelcoat & Graphics Package

Engine Choices

4.3L MerCruiser (190 hp)
 4.3L MPI MerCruiser (220 hp)
 5.0L MerCruiser (220 hp)
 5.0L MPI MerCruiser (260 hp)
 5.7L Alpha MerCruiser (250 hp)
 5.7L Bravo III MerCruiser (250 hp)
 350 Mag MPI Alpha MerCruiser (300 hp)
 350 Mag MPI Bravo I MerCruiser (300 hp)
 4.3 GL Volvo Penta (190 hp)
 4.3 GXi Volvo Penta (225 hp)
 5.0 GL Volvo Penta (220 hp)
 5.0 GXi Volvo Penta (270 hp)
 5.7 Gi Volvo Penta (280 hp)
 5.7 Gi DP Volvo Penta (280 hp)

Performance

Engine: 5.0 GXi Volvo Penta, Prop: 19 pitch

RPM	MPH	GPH	RANGE*
2000	9	4.2	108
3000	26	7.2	182
4000	38	12.0	160
WOT	49-51	—	—

Time to plane: 4.1 seconds
 Acceleration 0-20 MPH: 6.4 seconds

Engine: 5.7 Gi Volvo Penta, Prop: 19 pitch

RPM	MPH	GPH	RANGE*
2000	9	4.7	97
3000	29	7.7	190
4000	41	14.2	146
WOT	51-53	—	—

Time to plane: 3.6 seconds
 Acceleration 0-20 MPH: N/A**

* Range: Mileage range calculated on designated RPM and MPH figures shown above,
 and based on 90 percent of boat's fuel capacity.

** Not available.

Performance data is measured with two passengers,
 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load,
 weather/water conditions, and optional equipment, such as
 wakeboard tower, extended swim platform and generator.

Specifications

Length 24' 10" (7.57 m.)
Beam 102" (2.59 m.)
Depth 84" (2.13 m.)
Maximum Depth 91¼" (2.32 m.)
 w/o arch
Cockpit Depth 36" (.91 m.)
Approx. Wt. 5525 lbs. (2506 kg.)
 w/5.7 Gi Volvo Penta

Transom Deadrise 20°
Transom Width 98" (2.49 m.)
LOA on Trailer N/A
Fuel Capacity 56 gal. (212 L.)
Maximum Load 2240 lbs. (1016 kg.)
Max. Persons 10 or 2240 lbs. (1016 kg.)
NMMA Certified

Draft: A. Drive Unit Up 22" (.56 m.)
B. Drive Unit Down 36" (.91 m.)

Standard Features

Aft cabin
 AM/FM/CD/Sirius satellite stereo
 w/4 chrome speaker covers
 Anchor roller
 Automatic bilge pump
 Cabin courtesy lights
 Cabin throw pillows (3)
 Carry-on cooler
 China head, manual pump-out
 Cockpit refreshment center w/sink
 Color-coordinated Sunbrella Bimini
 top & w/boot
 Compass
 Deck hatch with screen
 Depth sounder
 Dinette/V-berth
 Dockside power (110V)
 Dual battery switch
 Galley with microwave, refrigerator,
 alcohol/electric stove, sink

Head compartment w/fiberglass
 shower, sink, porta-pottie
 High/low dual helm seat
 Hot water system
 Hour meter
 Hydraulic trim tabs
 Integrated swim platform w/walk-thru
 transom gate
 Portside chaise lounge seat
 Remote control spotlight
 Removable stern bench seat
 Ski tow ring
 Skid-resistant fiberglass floor
 Snap-in carpet
 Stainless steel rubrail
 Stainless steel deck rails
 Telescopic 3-step boarding ladder
 Tilt steering wheel
 Transom shower
 Vented cabin windows (3)
 Water tank (18 gallons)

Optional Features

China head, electric pump-out
 Dash mounted stereo remote
 Dockside air conditioner/reverse heat
 Electric anchor windlass
 Flat screen TV w/DVD player
 Grey water system

High altitude propeller
 Oil drip pan
 Radar arch
 Starboard windshield wiper
 Stern filler cushion & table

Optional Canvas

Camper Canvas Package: Canvas
 Package less stern curtain, plus aft
 camper top, aft camper side
 curtains, aft camper stern curtain

Canvas Package for Bimini top: side
 curtains, aft curtain, clear connector
 Cockpit cover

(All canvas choices except mooring cover are color-coordinated Sunbrella fabric)

Color Choices

White w/Black Gelcoat & Graphics Package
 White w/Blue Gelcoat & Graphics Package
 White w/Sand Gelcoat & Graphics Package

Engine Choices

5.0L MerCruiser (220 hp)
 5.0L MPI MerCruiser (260 hp)
 5.7L Alpha MerCruiser (250 hp)
 5.7L Bravo III MerCruiser (250 hp)
 350 Mag MPI Bravo I MerCruiser (300 hp)
 350 Mag MPI Bravo III MerCruiser (300 hp)
 MX 6.2 MPI Bravo I MerCruiser (320 hp)
 MX 6.2 MPI Bravo III MerCruiser (320 hp)

5.0 GL Volvo Penta (220 hp)
 5.0 GL DP Volvo Penta (220 hp)
 5.0 GXi Volvo Penta (270 hp)
 5.0 GXi DP Volvo Penta (270 hp)
 5.0 OSi DP Volvo Penta (270 hp)
 5.7 Gi Volvo Penta (280 hp)
 5.7 Gi DP Volvo Penta (280 hp)
 5.7 OSi DP Volvo Penta (280 hp)
 .7 GXi Volvo Penta (320 hp)
 5.7 GXi DP Volvo Penta (320 hp)
 5.7 OSXi DP (FWC) Volvo Penta (320 hp)

Performance

Engine: 5.0 GXi Volvo Penta, Prop: 17 pitch

RPM	MPH	GPH	RANGE*
2000	8	3.7	109
3000	20	7.4	136
4000	35	13.0	135
WOT	43-45	—	—

Time to plane: 5.2 seconds
 Acceleration 0-20 MPH: 8.6 seconds

Engine: 350 Magnum MPI Bravo III MerCruiser, Prop: 22 pitch

RPM	MPH	GPH	RANGE*
2000	9	4.3	106
3000	22	7.6	146
4000	33	12.0	139
WOT	46-48	—	—

Time to plane: 6.5 seconds
 Acceleration 0-20 MPH: 5.3 seconds

* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Performance data is measured with two passengers, ¾ to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

Specifications

Length 26' 11" (8.20 m.)
Beam 102" (2.59 m.)
Depth 86" (2.18 m.)
Maximum Depth 92" (2.34 m.)
Cockpit Depth 36" (.91 m.)
Approx. Wt. 5830 lbs. (2645 kg.)
 w/5.7 Gi Volvo Penta
Transom Deadrise 20°

Transom Width 97" (2.46 m.)
LOA on Trailer 30' (9.14 m.)
Fuel Capacity 72 gal. (273 L.)
Bridge Clearance 79" (2.01 m.)
Bridge Clearance w/Arch
 106" (2.69 m.)
 NMMA Certified

Draft: A. Drive Unit Up 19" (.49 m.)
B. Drive Unit Down 40" (1.02 m.)

Standard Features

Aft cabin
 AM/FM/CD/Sirius satellite stereo
 w/4 chrome speaker covers
 Anchor roller
 Automatic bilge pump
 Battery charger
 Cabin courtesy lights
 Cabin throw pillows (3)
 Cockpit refreshment center
 w/sink & ice box
 Color-coordinated Sunbrella Bimini
 top w/boot
 Compass
 Deck hatch w/screen
 Depth sounder
 Dinette/V-berth
 Dockside power (110V)
 Dual battery switch
 Dual helm seat w/flip-up bolster
 Galley with microwave, refrigerator,
 alcohol/electric stove, sink
 Head compartment with fiberglass
 shower, sink, manual china head
 Hot water system
 Hour meter
 Hydraulic trim tabs
 Integrated swim platform w/walk-thru
 transom gate
 Remote control spotlight
 Ski tow ring
 Skid-resistant fiberglass floor
 Snap-in carpet
 Stainless steel bow rail
 Stainless steel rubrail
 Telescopic 3-step boarding ladder
 Tilt steering wheel
 Transom shower
 U-shaped cockpit seating
 Vented cabin windows (4)
 Water tank (18 gallons)

Optional Features

China head, electric pump-out
 Dash-mounted stereo remote
 Dockside air conditioner/reverse heat
 Electric anchor windlass
 Flat screen TV w/DVD player
 Fore deck sun pad
 Grey water system
 High altitude propeller
 Radar arch
 Starboard windshield wiper

Optional Canvas

Canvas Package for Bimini top: side
 curtains, aft curtain, clear connector
 Cockpit cover

Color Choices

White w/Black Gelcoat & Graphics Package
 White w/Blue Gelcoat & Graphics Package
 White w/Sand Gelcoat & Graphics Package

Engine Choices

5.7L Bravo III MerCruiser (250 hp)
 350 Mag MPI Bravo I MerCruiser (300 hp)
 350 Mag MPI Bravo III MerCruiser (300 hp)
 MX 6.2 MPI Bravo I MerCruiser (320 hp)
 MX 6.2 MPI Bravo III MerCruiser (320 hp)
 5.0 GXi Volvo Penta (270 hp)
 5.0 GXi DP Volvo Penta (270 hp)
 5.0 OSi DP Volvo Penta (270 hp)
 5.7 Gi Volvo Penta (280 hp)
 5.7 Gi DP Volvo Penta (280 hp)
 5.7 OSi DP Volvo Penta (280 hp)
 5.7 GXi Volvo Penta (320 hp)
 5.7 GXi DP Volvo Penta (320 hp)
 5.7 OSXi DP (FWC) Volvo Penta (320 hp)

Performance

Engine: 5.0 GXi DP Volvo Penta, Props: F3

RPM	MPH	GPH	RANGE*
2000	9	4.2	139
3000	22	7.6	188
4000	33	12.8	167
WOT	42-44	—	—

Time to plane: 4.8 seconds
 Acceleration 0-20 MPH: 7.3 seconds

Engine: 5.7 Gi DP Volvo Penta, Props: F3

RPM	MPH	GPH	RANGE*
2000	9	4.4	133
3000	20	8.8	147
4000	32	13.1	158
WOT	42-44	—	—

Time to plane: 4.0 seconds
 Acceleration 0-20 MPH: 6.0 seconds

Engine: MX 6.2 MPI Bravo III MerCruiser, Props: 22 pitch

RPM	MPH	GPH	RANGE*
2000	9	4.6	127
3000	20	9.3	139
4000	33	12.8	167
WOT	43-45	—	—

Time to plane: 6.4 seconds
 Acceleration 0-20 MPH: 5.5 seconds

* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet. Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

Specifications

Length 27' 5" (8.36 m.)
Beam 102" (2.59 m.)
Depth 89" (2.26 m.)
Maximum Depth 97" (2.46 m.)
Cockpit Depth 36" (.91 m.)
Approx. Wt. 6225 lbs. (2823 kg.)
 w/5.0 GXi Volvo Penta
Transom Deadrise 20°

Transom Width 97" (2.46 m.)
LOA on Trailer 30' 6" (9.30 m.)
Fuel Capacity 72 gal. (273 L.)
Bridge Clearance 84" (2.13 m.)
Bridge Clearance w/Arch
 106" (2.69 m.)
 NMMA Certified

Draft: A. Drive Unit Up 19" (.49 m.)
B. Drive Unit Down 40" (1.02 m.)

Standard Features

Aft cabin
 AM/FM/CD/Sirius satellite stereo
 w/4 chrome speaker covers
 Automatic bilge pump
 Battery charger
 Bow pulpit w/roller & rope locker
 Cabin courtesy lights
 Cabin throw pillows (3)
 Cockpit refreshment center
 w/sink & ice box
 Color-coordinated Sunbrella
 Bimini top w/boot
 Compass
 Deck hatch w/screen
 Depth sounder
 Dinette/V-berth
 Dockside power (110V)
 Dual battery switch
 Galley with microwave, refrigerator,
 alcohol/electric stove, sink
 Head compartment with fiberglass
 shower, sink, manual china head

High/low dual helm seat
 Hot water system
 Hour meter
 Hydraulic trim tabs
 Integrated swim platform w/walk-
 thru transom gate
 Portside chaise lounge seat
 Remote control spotlight
 Removable stern bench seat
 Ski tow ring
 Skid-resistant fiberglass floor
 Snap-in carpet
 Stainless steel deck rails
 Stainless steel grab handles
 Stainless steel rubrail
 Starboard windshield wiper
 Telescopic 3-step boarding ladder
 Tilt steering wheel
 Transom shower
 Vented cabin windows (2)
 Water tank (18 gallons)

Optional Features

Additional vented cabin windows (2)
 China head, electric pump-out
 Dash-mounted stereo remote
 Dockside air conditioner/reverse heat
 Electric anchor windlass
 Extended swim platform
 Flat screen TV w/DVD player

Grey water system
 High altitude propeller
 Radar arch
 Stainless steel storage rack for
 docking fenders
 Stern filler cushion & table
 Westerbeke 5KW generator

Optional Canvas

Camper Canvas Package: Canvas
 Package less stern curtain, plus aft
 camper top, aft camper side
 curtains, aft camper stern curtain

Canvas Package for Bimini top: side
 curtains, aft curtain, clear connector
 Cockpit cover

Color Choices

White w/Black Gelcoat & Graphics Package
 White w/Blue Gelcoat & Graphics Package
 White w/Sand Gelcoat & Graphics Package

Engine Choices

5.7L Alpha MerCruiser (250 hp)
 5.7L Bravo III MerCruiser (250 hp)
 350 Mag MPI Bravo I MerCruiser (300 hp)
 350 Mag MPI Bravo III MerCruiser (300 hp)
 MX 6.2 MPI Bravo I MerCruiser (320 hp)
 MX 6.2 MPI Bravo III MerCruiser (320 hp)

5.0 GXi Volvo Penta (270 hp)
 5.0 GXi DP Volvo Penta (270 hp)
 5.0 OSi DP Volvo Penta (270 hp)
 5.7 Gi Volvo Penta (280 hp)
 5.7 Gi DP Volvo Penta (280 hp)
 5.7 OSi DP Volvo Penta (280 hp)
 5.7 GXi Volvo Penta (320 hp)
 5.7 GXi DP Volvo Penta (320 hp)
 5.7 OSXi DP (FWC) Volvo Penta (320 hp)

Performance

Engine: 5.0 OSXi DP Volvo Penta, Props: F3

RPM	MPH	GPH	RANGE*
2000	9	4.1	142
3000	20	9.0	144
4000	32	13.5	154
WOT	42.44	—	—

Time to plane: 4.1 seconds
 Acceleration 0-20 MPH: 6.1 seconds

Engine: 5.0 GXi DP Volvo Penta, Props: F3

RPM	MPH	GPH	RANGE*
2000	9	3.8	154
3000	20	8.3	156
4000	32	12.4	167
WOT	42.44	—	—

Time to plane: 3.4 seconds
 Acceleration 0-20 MPH: 5.4 seconds

Engine: 5.7 OSXi DP (FWC) Volvo Penta, Props: F3

RPM	MPH	GPH	RANGE*
2000	9	4.1	142
3000	19	9.3	132
4000	32	13.8	150
WOT	41-43	—	—

Time to plane: 4.3 seconds
 Acceleration 0-20 MPH: 6.7 seconds

* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet. Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

MerCruiser Sterndrive Engine Information

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

3.0L MERCRUISER

135 hp/101 kw.
4
181
9.3:1
4400-4800
2.0:1
Power
Power
29"
26"
21" (above crankshaft at CL)
635 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

4.3L MERCRUISER

190 hp/142 kw.
6
262
9.4:1
4400-4800
1.81:1
Power
Power
28"
30"
21" (above crankshaft at CL)
848 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

4.3L MPI MERCRUISER

220 hp/164 kw.
6
262
9.4:1
4400-4800
1.62:1
Power
Power
28"
30"
22" (above crankshaft at CL)
865 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

4.3L MPI BRAVO III MERCRUISER

220 hp/164 kw.
6
262
9.4:1
4400-4800
2.2:1
Power
Power
28"
30"
22" (above crankshaft at CL)
921 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.0L MERCRUISER

220 hp/164 kw.
8
305
9.4:1
4400-4800
1.62:1
Power
Power
32"
30"
22" (above crankshaft at CL)
946 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.0L MPI MERCRUISER

260 hp/194 kw.
8
305
9.4:1
4600-5000
1.62:1
Power
Power
32"
30"
22" (above crankshaft CL)
952 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.0L MPI BRAVO III MERCRUISER

260 hp/164 kw.
8
305
9.4:1
4600-5000
2.20:1
Power
Power
32"
30"
22" (above crankshaft at CL)
1019 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.7L MERCRUISER

250 hp/186 kw.
8
350
9.4:1
4400-4800
1.62:1
Power
Power
32"
30"
22" (above crankshaft at CL)
946 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.7L BRAVO III MERCURISER

250 hp/186 kw.
8
350
9.4:1
4400-4800
2.2:1
Power
Power
32"
30"
22" (above crankshaft at CL)
1013 lbs. (pkg. weight)

350 MAGNUM MPI ALPHA MERCURISER

300 hp/224 kw.
8
350
9.4:1
4800-5200
1.47:1
Power
Power
32"
30"
22" (above crankshaft at CL)
946 lbs. (pkg. weight)

350 MAGNUM MPI BRAVO I MERCURISER

300 hp/224 kw.
8
350
9.4:1
4800-5200
1.50 to 1.65:1
Power
Power
32"
30"
22" (above crankshaft at CL)
987 lbs. (pkg. weight)

350 MAGNUM MPI BRAVO III MERCURISER

300 hp/224 kw.
8
350
9.4:1
4800-5200
2.00 to 2.20:1
Power
Power
32"
30"
22" (above crankshaft at CL)
1013 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MX 6.2 MPI BRAVO I MERCURISER

320 hp/239 kw.
8
377
9.0:1
4800-5200
1.50 to 1.65:1
Power
Power
32"
30"
22" (above crankshaft at CL)
993 lbs. (pkg. weight)

MX 6.2 MPI BRAVO III MERCURISER

320 hp/239 kw.
8
377
9.0:1
4800-5200
2.00 to 2.20:1
Power
Power
32"
30"
22" (above crankshaft at CL)
1019 lbs. (pkg. weight)

496 MAGNUM MPI BRAVO I MERCURISER

375 hp/280 kw.
8
496
9.1:1
4400-4800
1.5:1
Power
Power
35"
33"
24" (above crankshaft at CL)
1199 lbs. (pkg. weight)

496 MAGNUM MPI BRAVO III MERCURISER

375 hp/280 kw.
8
496
9.1:1
4400-4800
2.00:1
Power
Power
35"
33"
24" (above crankshaft at CL)
1224 lbs. (pkg. weight)

496 MAGNUM HO BRAVO III MERCURISER

425 hp/317 kw.
8
496
9.1:1
4600-5000
2.00:1
Power
Power
35"
33"
24" (above crankshaft at CL)
1224 lbs. (pkg. weight)

Volvo Penta Sterndrive Engine Information

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

3.0 GL SX VOLVO PENTA

135 hp/100 kw.
4
181
9.2:1
4600
1.97:1
Power
Power
32½"
26"
21" (above crankshaft at CL)
709 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

4.3 GL SX VOLVO PENTA

190 hp/141 kw.
6
262
9.4:1
4600
1.79:1
Power
Power
32½"
31"
20½" (above crankshaft at CL)
876 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

4.3 GXi SX VOLVO PENTA

225 hp/168 kw.
6
262
9.4:1
4800
1.60 to 1.66:1
Power
Power
32½"
31"
22" (above crankshaft at CL)
896 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

4.3 GXi DP VOLVO PENTA

225 hp/167 kw.
6
262
9.4:1
4800
1.95:1
Power
Power
32½"
31"
21" (above crankshaft at CL)
916 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.0 GL SX VOLVO PENTA

220 hp/164 kw.
8
305
9.4:1
4800
1.60:1
Power
Power
36½"
28½"
22" (above crankshaft at CL)
975 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.0 GL DP VOLVO PENTA

220 hp/164 kw.
8
305
9.4:1
4800
1.78:1 to 1.94:1
Power
Power
37"
28½"
22" (above crankshaft at CL)
962 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.0 GXi SX VOLVO PENTA

270 hp/201 kw.
8
305
9.4:1
5000
1.60:1
Power
Power
37"
28½"
22" (above crankshaft at CL)
1020 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.0 GXi DP VOLVO PENTA

270 hp/201 kw.
8
305
9.4:1
5000
1.95:1
Power
Power
37"
28½"
22" (above crankshaft at CL)
1040 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.0 OSi DP VOLVO PENTA

270 hp/201 kw.
8
305
9.4:1
5000
2.32:1
Power
Power
37"
28 1/4"
22" (above crankshaft at CL)
995 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.7 Gi SX VOLVO PENTA

280 hp/209 kw.
8
350
9.4:1
5000
1.51:1
Power
Power
37"
28 1/4"
22" (above crankshaft at CL)
1020 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.7 Gi DP VOLVO PENTA

280 hp/209 kw.
8
350
9.4:1
5000
1.95:1
Power
Power
37"
28 1/4"
22" (above crankshaft at CL)
1040 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.7 OSi DP VOLVO PENTA

280 hp/209 kw.
8
350
9.4:1
5000
1.78:1
Power
Power
37"
28 1/4"
22" (above crankshaft at CL)
1000 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.7 GXi SX VOLVO PENTA

320 hp/239 kw.
8
350
9.4:1
5200
1.51:1
Power
Power
37"
28 1/4"
22" (above crankshaft at CL)
1011 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.7 GXi DP VOLVO PENTA

320 hp/239 kw.
8
350
9.4:1
5200
1.95:1
Power
Power
37"
28 1/4"
22" (above crankshaft at CL)
1040 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.7 OSXi DP VOLVO PENTA

320 hp/239 kw.
8
350
9.4:1
5200
1.78:1
Power
Power
37"
28 1/4"
22" (above crankshaft at CL)
1015 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

8.1 Gi DP VOLVO PENTA

375 hp/280 kw.
8
496
9.1:1
4600
1.68:1
Power
Power
41"
33"
21.4" (above crankshaft at CL)
1258 lbs. (pkg. weight)