


2011

PRODUCT  
SPECIFICATIONS  
MANUAL

GLASTRON

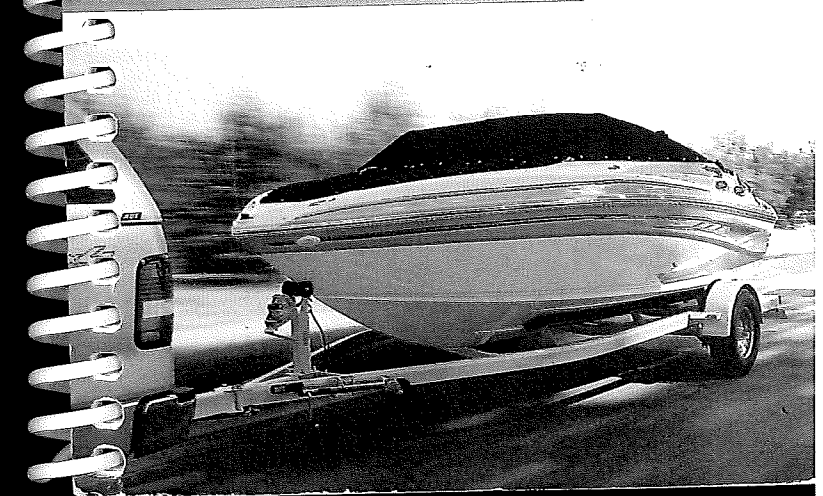

## Table of Contents

Model Designator Key .....	2
2011 Model Directory .....	3
Over 50 Years of Leadership .....	4-5
Glastron Pricing: The Real Deal™ .....	6
Glastron Performance .....	7
SSV® Hull Design .....	8-9
Glastron Construction .....	10-11
Customer Satisfaction .....	12
Glastron's Unmatched Warranty .....	13
Component Warranty Summary .....	14-17
Features & Benefits Summary .....	18-19
Canvas Choices .....	20
Seating Choices .....	21
EZ Loader® Trailers .....	22-23
Financing Guide .....	24
Definitions of Measurements .....	25
Model Specifications .....	26-69
Sterndrive Engine Specifications .....	70-78

## Model Designator Key

- Letters in model name designate series
- First two numbers in model name designate boat length
- Third number in model name designates boat type:

**0 = outboard**

**5 = sterndrive**

**9 = cabin model**

### Examples:

GT 180 is an 18-foot outboard bowrider

DX 235 is a 23-foot sterndrive deck boat

GS 259 is a 25-foot cabin model

## Model Directory

### SSV Bowriders

SSV 170 .....	26
SSV 175 .....	28

### MX Bowrider

MX 180 .....	30
MX 185 .....	32

### GT Bowriders

GT 180 .....	34
GT 185 .....	36
GT 205 .....	38
GT 225 .....	40

### GT Ski & Fish

GT 185 Ski & Fish .....	42
GT 205 Ski & Fish .....	44

### GLS Bowriders

GLS 195 .....	46
GLS 215 .....	48
GLS 235 .....	50
GLS 255 .....	52

### Deck Boats

DS 205 .....	54
DS 215 .....	56
DX 215 .....	58
DX 235 .....	60

### GS Cuddy Cabin Models

GS 209 .....	62
--------------	----

### GS Sport Cruisers

GS 249 .....	64
GS 259 .....	66
GS 289 .....	68

## Over 50 Years of Leadership

- Glastron has been making boats for **54 years**—a milestone few boat companies have achieved. During that time, they have built **nearly half a million fiberglass runabouts**.



- More than any other manufacturer, Glastron has a **legacy of unprecedented product innovations and technological breakthroughs**. Among them:


- The deep-vee hull
- The tri-hull
- Two-tone graphics
- Sterndrive-powered boats
- The SSV® hull
- Fiberglass stringer systems




- More than a few **well-known people over the years have owned Glastron boats**, from President Lyndon Johnson...to England's Royal Family...to Elvis Presley. Glastron boats also appeared in **numerous movies and television shows**.

Glastron was James Bond's boat of choice in *Live and Let Die* and *Moonraker*.

The most famous Glastron ever? The Batboat!

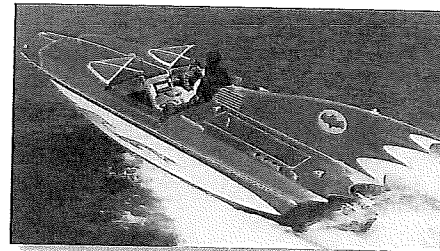

- The **Glastron "sweep spear" is the most well-known icon in boating**. It's the marine industry's equivalent to the Nike "swoosh."



- Throughout the company's 54 years, its focus has been on designing and building boats that provide a great overall family boating experience. The company has always managed to stay ahead of other companies in building boats that possess three distinct Glastron qualities:
  - **Advanced technology**
  - **Highly functional, family-friendly designs**
  - **Outstanding performance**


## "The Real Deal" Pricing

*the Real Deal*

- Other boat companies sometimes cite "Manufacturer's Suggested Retail Prices" which are often inflated to give the buyer the impression that he/she is buying at a discount. Glastron does not quote MSRP's.
- Glastron and its dealers have a straightforward approach to pricing that eliminates the guesswork by offering each model at a no-haggle selling price. In short, they're "The Real Deal".
- "The Real Deal" prices are the everyday prices that buyers can expect to pay for a new boat when they visit their Glastron dealer.
- "The Real Deal" prices are prominently featured on Glastron's U.S. and Canadian websites, along with "The Real Deal" prices for all available options. Customers are encouraged to visit [www.glastron.com](http://www.glastron.com) to get the full story on Glastron Boats, then build and price the Glastron boat that meets their exact needs.

## Glastron Performance

- Glastron's **penchant for performance** is known throughout the industry.

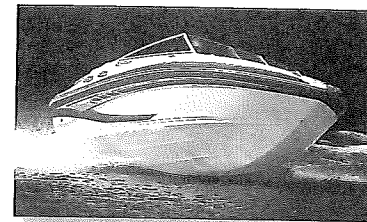


- Every Glastron model delivers performance attributes that every family boater can appreciate (and every Glastron owner knows):
  - **Very quick planing times**
  - **Minimal bowrise**
  - **Impressive top speeds**
  - **Low minimum planing speeds** (particularly important for tubing, kneeboarding and wakeboarding)
  - **Agile handling**
  - **Excellent fuel economy**
- **Glastron provides performance data on every model.** Found on pages 26-69 of this manual, it includes authenticated speed, acceleration and, in many cases, fuel economy figures for popular engine choices.
- To see how Glastron boats stack up against other brands in third-party performance comparisons, be sure to also visit [www.BoatTest.com](http://www.BoatTest.com).


 **BOATTEST.COM**<sup>®</sup>

## SSV<sup>®</sup> Hull Design

- The legendary **SSV** (Super Stable Vee) **hull design** is the biggest reason Glastron boats perform so well. It's quick to plane (with minimal bowrise), stable at high speeds and tracks tight in the turns.
- The SSV hull's light weight and hydrodynamic efficiency results in another big advantage: **excellent fuel economy.**

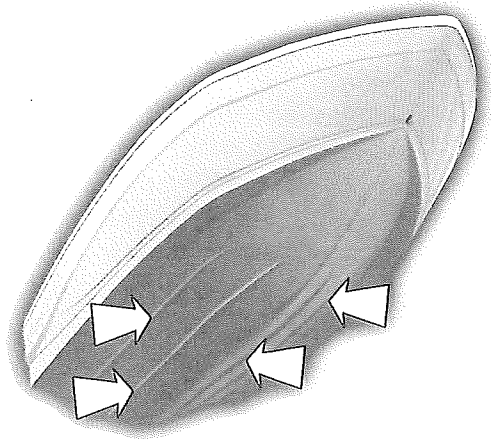



- The SSV hull features **tuned strakes** molded longitudinally into the hull. They form a series of horizontal planing surfaces that create lift by deflecting spray down and away from the hull—a key reason why Glastron boats get on plane so quickly.




- Under power, the SSV hull's **wide reverse chines create a "bank" of water for added lift and precise, stable**

**turning.** Boats without them have a flatter running surface that results in a more jarring ride and a tendency to slide in turns.

- On most boat hulls, the chines diminish in the forward half of the hull. In comparison, the SSV hull's wide chines extend far forward. These **extended chines reduce rocking from side-to-side and front-to-back** by acting as sponsons when the boat is at rest.



With diminishing chines




With extended chines


- **Glastron's SSV hull is patented;** only Glastron has it. So no matter what other manufacturers may tell you, they don't have an SSV hull.

## Double Truss Hull Construction (DTHC)


- All bowrider models 22 feet in length or less are built with our DTHC method. Our **Double Truss Hull Construction (DTHC)** is the combination of our Super Stable Vee hull bonded together with our one-piece composite fiberglass stringer system.
- Our one-piece composite fiberglass stringer system in runabout models 22 feet or less in length, provides unparalleled strength and rigidity which helps eliminate deck and hull twisting. It runs from bow to stern and is engineered to fit snugly and evenly where the stringer system and hull edges meet. It is fully finished and gelcoated so the lower storage compartments are smooth, easy to wipe clean, with no absorption of mildew or odors.

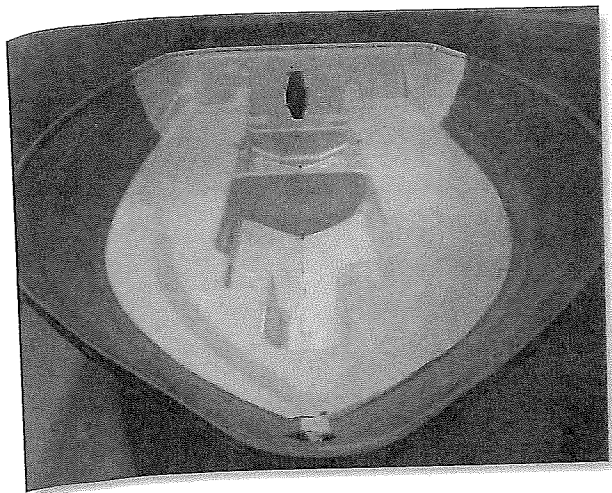

- High performance adhesive—Our stringer system is bonded to the hull using a high performance adhesive that is stronger than fiberglass and often used on yachts and high performance racing boats, due to its strength and durability.

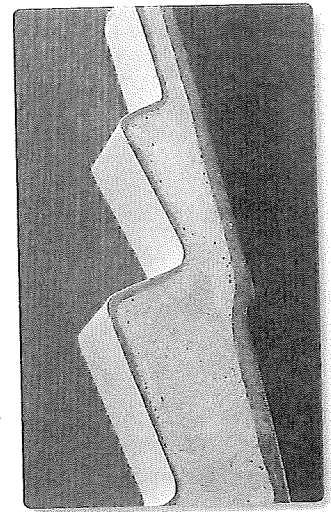

- Flotation foam—We inject high density 2 pound per square foot closed cell flotation foam throughout the cavity between the hull and stringer system. This strengthens the hull and acts as a shock insulator for a quieter, less jarring ride. It is distributed evenly and generously from the very front to the very back of the hull providing superior upright and level flotation.



- Multi-axial fiberglass fabric—Our hulls are constructed using multi-axial fiberglass—a material used in high performance racing boats vs. some manufacturers who use conventional woven roving fiberglass.

## Customer Satisfaction

- Glastron has always been known for its ability to anticipate the needs and wants of family boaters. As a result, **our boats possess the essential elements for a great boating experience:**
  - Attractive styling
  - Highly functional, family-friendly design
  - Impressive performance
  - Lots of built-in safety features
- Over the course of 54 years, **we've built a loyal following among Glastron owners.** They know us for quality products and outstanding customer support.
- **Glastron enjoys one of the industry's highest occurrences of repeat buyers.** Three out of four Glastron owners (we survey every new owner) indicate they're likely to buy another Glastron boat.
- Since the program was established by the National Marine Manufacturers Association (NMMA), Glastron has received the industry's **Excellence in Customer Satisfaction Award** regularly.



## Glastron's Unmatched Warranty

Manufacturers of quality products tend to stand behind them, so the best way to judge the quality of a boat is to look at how well it's backed. When you compare Glastron to other boat builders, you'll see that Glastron's warranty is among the best in the marine industry.



- **Structural Component Lifetime Limited Warranty:**

For as long as you own the boat. A structural defect shall be defined as defect that causes the hull or deck to be unsafe or unfit for use under normal operating conditions.\*



- **Osmotic Hull Blister Limited Warranty:** Five (5) year coverage against hull blistering\*



- **Exterior Cosmetic Gel Coat Limited Warranty:** One (1) year coverage for cracking, crazing, discoloring and fading.\*



- **Non-Structural Parts and Components Limited Warranty:** One (1) year coverage for defects in non-structural parts and components.\*

\*Propulsion warranties vary by manufacturer.



## 2011 Glastron Boats Limited Warranty (North America)

Glastron, LLC ("Glastron") warrants to you, the first North American retail owner, that it will repair or replace certain defects in materials or workmanship it finds to its satisfaction to occur within the applicable Warranty Periods and subject to the terms, conditions and exclusions ("This Warranty Does Not Cover") set forth below. This warranty gives you specific legal rights; you may also have other rights which vary from state to state. There are no warranties that extend beyond the description on the face hereof.

Under the laws of certain states, there may be no implied warranties from Glastron applicable to your boat, and all implied warranties (INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE) are disclaimed and excluded where they do not arise under applicable state law. Any IMPLIED WARRANTIES arising under applicable state law are LIMITED TO THE DURATION OF THE APPLICABLE SECTION OF THIS WRITTEN WARRANTY ON ALL WARRANTED PARTS AND COMPONENTS. ALL IMPLIED WARRANTIES, IF ANY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED AND EXCLUDED AFTER THESE PERIODS. NOTE: SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

**Express Limited Warranty Coverage:** Exterior Cosmetic Gel Coat Limited Warranty: One (1) year coverage for cracking, crazing, discoloring and fading except that Glastron shall have no liability or responsibility to correct or repair any damage if the original gel surface has been altered in any way, including repair, application of any coating other than marine anti-fouling bottom paint, improper surface preparation for paint, or improper or excessive sanding or sandblasting.

**Non-Structural Parts and Components Limited Warranty:** One (1) year coverage for defects in non-structural parts and components.

**Osmotic Hull Blister Limited Warranty:** Five (5) year coverage against hull blistering caused by osmosis subject to the following proration schedule. The warranty provided in this section is applicable only to the original retail owner and is VOID if the original factory gel coat surface has been altered by improper or excessive sanding, scraping, sandblasting or accident repair. A marine barrier coating with proper surface preparation is required if the boat is bottom painted or if the boat is left in fresh or salt water for more than 60 days in any 90 day period. In the event of osmotic blistering, Glastron, will at its option repair any hull damage and apply a marine barrier coating to the affected surface area(s). For the purpose of determining coverage, osmotic blisters are defined as those blisters larger than 1/8" diameter and with a depth of 1/16" or greater, which occur on the hull below the waterline. Repairs will be made (at Glastron's discretion) by the selling dealer, a designated repair facility or the Glastron factory.

The following prorated schedule shall apply in any case of osmotic hull blister warranty coverage for labor and materials only. All repairs for osmotic blistering must be pre-approved by Glastron prior to the commencement of any work. Glastron must also pre-approve the method and cost of the repairs, subject to the following proration schedule:

- Less than two (2) years from date of delivery: 100%
- Two (2) to three (3) years from date of delivery: 75%
- Three (3) to four (4) years from date of delivery: 50%
- Four (4) to five (5) years from date of delivery: 25%

**Osmotic hull blister warranty** coverage shall be limited to one repair not to exceed \$150 per foot of boat length prior to prorating.

**Structural Component Lifetime Limited Warranty:** For as long as you own the boat. A structural defect shall be defined as defect that causes the hull or deck to be unsafe or unfit for use under normal operating conditions. For the purpose of this coverage, the hull is defined as the single fiberglass molded shell and integral fiberglass structural components including stringers, transom and related structural components which are below the hull flange. The deck is defined as the single fiberglass molded shell and integral fiberglass structural components above the hull flange. Warranty coverage applies only to warranty claims first arising and reported to Glastron or your dealer within the applicable warranty period. All Warranty Periods run from the date of delivery to the first retail customer, except:

For boats sold at retail more than twelve (12) months after the date of delivery to the dealer, the selling dealer will be required to submit a condition report with photos at time of delivery. After receiving that report and photos, Glastron will determine and report what warranty coverage for exterior cosmetic gel coat remains effective, if any. The balance of the remaining warranty coverage will be in effect, but calculation of the remaining warranty period will run from the date of delivery of the boat to the dealer, not from the date the boat was sold at retail. The one year trailer limited warranty will have expired.

For boats sold at retail more than thirty-six (36) months after the date of delivery to the dealer, only the structural component lifetime limited warranty will be in effect. All other warranties will have already expired.

Items which are damaged due to storage/exposure conditions will not be covered by Glastron and replacement/repair of the affected parts will be the responsibility of the dealer.

**This Limited Warranty Does Not Cover:** A new boat purchased from any party other than an authorized Glastron dealer.

A boat, including its components that have been altered or modified so as to adversely affect its operation, performance or durability.

Engines, outdrives, controls, propellers, batteries, appliances and other equipment or accessories that are warranted by manufacturers other than Glastron. Any matter involving the power train is the responsibility of the engine manufacturer or its authorized representative, and all such claims should be submitted in accordance with the applicable warranty terms and requirements.

**Note:** it is the owner's responsibility to complete any warranty registration procedure that may be applicable to these components.

Window glass, mirrors, varnishes, paints, fabrics, chromium, stainless steel and other metal finishes.

The cost of removal or re-instatement of parts or disassembly of units to repair or replace components covered by this warranty.

Any boat that has been misused, used in a negligent manner, used for racing, used for rental, charter, Military or other commercial purposes, used without normal maintenance, improper lifting or trailering, operated contrary to any instruction furnished by Glastron, or operated in violation of any Federal, State, Coast Guard or other governmental agency laws, rules or regulations.

Any representation relating to speed, range, fuel consumption or other estimated performance characteristics.

Loss of time, inconvenience, boat payments, retail charges, travel expense, loss of use, hauling charges, towing and storage charges, loss or damage to personal property, or other remedies not specifically allowed.

Dealer preparation, cleaning, final adjustments and alignments in preparing the boat for delivery or commissioning.

Leakage around windshield, hatches or other designed openings.

Fit and adjustment of exterior canvas tops, enclosures, and weather covers.

Sacrificial deterioration of anti-fouling paint or zinc anodes.

Damage resulting from electrolysis or corrosion of any nature from any source.

Improper set up of boat on trailer or lift, modification of trailer to accommodate other manufacturer's boats.

Trailer tires and trailer paint defects caused by fading, peeling, chipping, scratching and rusting attributed to normal usage.  
Pre-Delivery Service

The Dealer, prior to delivering a new Glastron boat to the owner, is to make a complete inspection and perform all necessary pre-delivery services. Completion of the pre-delivery inspection on each Glastron product by the dealer is a requirement. The cost of the pre-delivery inspection is your responsibility.

Before delivery is made, the dealer is to complete the "Pre-Delivery Service Record" portion of the warranty by making the inspection and checking off appropriate items from the list.

After completion of the necessary work, sign the form where indicated. You must also sign the pre-delivery service record portion. No warranty coverage is applicable to your boat unless this form is completed and signed. Additional service, such as a 20 hour service check, is recommended to reduce possible future problems and build customer confidence in the dealer and Glastron product. The cost of this service is normally the customer's responsibility.

#### Obtaining Repairs Under This Limited Warranty:

Your sole and exclusive remedy is the repair or replacement, at Glastron's sole option, of parts and components covered by this warranty. **NOTE:** Glastron will complete repairs covered under this limited warranty during the first year of ownership at no charge. To be eligible for warranty coverage, you must follow the maintenance schedules set forth in the Owner's Manual. Receipts showing dates and services performed must be kept and furnished to an authorized Glastron

dealer if requested by Glastron. The Owner's Registration Card must be presented to the dealer whenever you request service.

This Glastron boat, including any alleged defective part, must be returned to the original selling dealer or an authorized Glastron dealer within the applicable warranty period to obtain warranty service. If you have moved to another location, you should call Glastron for assistance to locate the nearest Glastron dealer in your area. The following procedures will apply to your warranty claim:

A. Your dealer will contact and receive an authorization number for repairs from Glastron.

B. Upon completion of repairs, you must pay the dealer any monies due for non-covered items.

C. You assume all liability for payment of non-authorized repairs.

D. You must sign the Glastron warranty claim form if your dealer did not submit your claim via the Extranet.

If sublet warranty repairs are required for any reason, your Glastron dealer will be responsible for choosing a qualified and reputable repair facility, and your Glastron Dealer will be responsible for all work performed by the sublet repair facility. Before referring any work to a sublet repair facility, the dealer must submit a written estimate to Glastron's claims department to obtain written pre-authorization (including a claim authorization number). Glastron will not honor or pay for claims for repairs by sublet facilities unless this procedure has been followed. Glastron will not authorize or pay for sublet repairs initiated because of a lack of dealer service facilities.

The Glastron dealer will carry out the warranty procedures on the owner's behalf. All warranty work will be performed at an authorized dealer, at the Glastron factory, or at another repair facility that Glastron selects. The owner is responsible for the expense associated with transporting the boat to and from the repair facility. This warranty does not include incidental or consequential damages, which are specifically DISCLAIMED and EXCLUDED. Note: SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. Any action or complaint for breach of warranty shall be barred unless it is commenced within one year from the date the alleged breach first occurred, regardless of the time remaining in the Warranty Period.

**Other Information:** Coverage remaining under the limited Warranty Periods may be transferred to a second retail purchaser for a \$150 to \$300 transfer fee payable to Glastron. Any Lifetime Structural Limited Warranty that is transferred is limited to ten (10) years from the original date of retail sale on all transferred boats. The transfer must occur within five (5) years of the original date of retail sale. The transfer fee must be paid within fifteen (15) days of purchase of the used boat. Proof of purchase date of the used boat is required. The warranty may only be transferred once. To transfer this limited warranty send the original owner's plastic registration card, if available, along with a copy of the bill of sale and a check made payable to "Glastron, LLC". The fee to transfer the limited warranty is One Hundred and Fifty Dollars (\$150) for boats less than twenty feet in length or Three Hundred Dollars (\$300) for boats over twenty feet in length. Glastron reserves the right to reject warranty transfer requests for boats that have been damaged, neglected, or otherwise previously excluded from warranty coverage.

This document contains the entire warranty given by Glastron. Neither your dealer nor anyone else is authorized to modify or change the terms of this limited warranty, and questions concerning the scope of this limited warranty should be addressed directly to Glastron. Your Glastron dealer is an independent business, and is not Glastron's agent. Glastron reserves the right to change or improve the design, manufacture or specifications of Glastron boats, without obligation to modify any boat previously manufactured.

## Features & Benefits Summary

### FEATURES:

### BENEFITS:


- | FEATURES:   | BENEFITS:  |
|---|--|
| 1. 50+ year brand legacy  | Glastron was the first company to produce fiberglass boats on a large scale; no other manufacturer has as many product innovations and technological breakthroughs |
| 2. Performance  | With a Glastron boat, performance is designed in from the start  |
| 3. Patented SSV® hull design  | Quick planing; superior handling; enhanced fuel economy  |
| 4. Double Truss Hull Construction (DTHC) 17, 18, 19, 20, 21 and 22-foot bowriders and Ski & Fish models | One-piece composite fiberglass stringer system provides unparalleled strength and rigidity, helping eliminate hull twisting  |
| 5. Unitized deck/floor construction on most runabout models   | Clean, seamless appearance; greater structural integrity; smooth, quiet, responsive ride   |
| 6. Fully finished hull & stringer system on most runabout models  | Gelcoated compartments are easy to wipe clean with no absorption of mildew or odors  |
| 7. Key structural areas are reinforced with multi-axial knitted fiberglass                              | Double strength in these important areas   |
| 8. Aircraft locknuts on bolts   | Strength; long-term durability   |
| 9. One-piece, lock looped marine-grade carpet   | Better appearance; no seams  |
| 10. Smoother Surface Barrier Coat (SSBC)  | Helps prolong life of the hull   |

### FEATURES:


### BENEFITS:

- |  |  |
|--|--|
| 11. Marine-grade vinyl; marine-grade stitching                                 | UV protected   |
| 12. Ski locker drain in subfloor   | Lets water drain into bilge, keeping locker dry                  |
| 13. Tilt steering wheel standard on most models                                | More comfortable steering position                               |
| 14. Individual Faria® analog gauges  | Easy-to-read; lifetime warranty                                  |
| 15. Gas fill is located on side of boat (never over swim platform)             | Eliminates risk of fuel spilling onto swim platform              |
| 16. Low, built-in swim platform with stainless steel boarding ladder           | Ease of boarding   |
| 17. Boarding ladder on runabouts is located on starboard side of swim platform | Allows driver to see skier at all times when circling for pickup |
| 18. Each model is carefully designed for the proper weight-to-horsepower ratio | Better planing time; better fuel economy; better top speed       |
| 19. Choice of MerCruiser® or Volvo Penta® sterndrive power                     | Customer can select preferred brand                              |
| 20. Choice of Mercury®, Yamaha® or Evinrude® outboard power                    | Customer can select preferred brand                              |


## Canvas Choices



Soft Top




Bimini Top



Canvas Package



Camper Canvas Package



Bow Cover




Cockpit Cover


Mooring Cover

- SSV bowriders feature black canvas
- MX Bowriders feature color-matched canvas (black, royal blue, red)
- GT bowriders and GT Ski & Fish models feature color-matched canvas (black, royal blue, red)
- GLS, DS and DX models feature color-matched canvas (black, royal blue, red)
- GS models feature color-matched canvas (black, navy blue, pewter, crimson red)
- All mooring covers feature gray canvas with waterproof inner liner


## Bowrider Seating

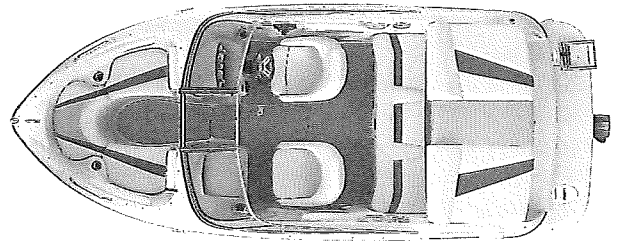

Sport Seating (SL)

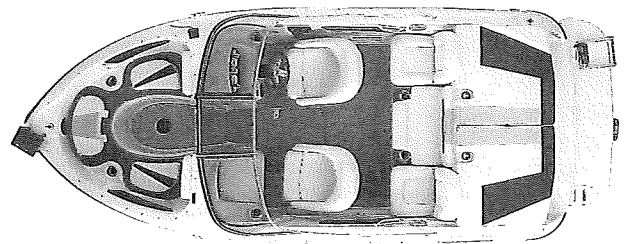

Ski & Fish Seating

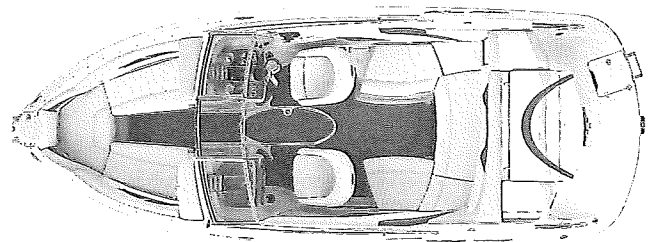

U-Shaped Seating

- Sport Seating (SL) is standard on all bowrider models from 17 through 21 feet
- Ski & Fish Seating is featured on GT Ski & Fish models
- U-Shaped Seating is standard on GT 225, GLS 235 and GLS 255

## EZ Loader Custom Boat Trailers

Glastron Boat Model	Trailer Model	Axle(s)
SSV 170	GM 2100S	Single w/o Brakes
SSV 175	GM 2450S	Single w/o Brakes
MX 180	MX 3000S	Single w/Brakes
MX 185	MX 3000S	Single w/Brakes
GT 180	GM 3000S	Single w/Brakes
GT 185	GM 3000S	Single w/Brakes
GT 205	GM 3500S	Single w/Brakes
GT 225	GM 4000T	Tandem w/Brakes One Axle
GT 185 SF	GM 3500S	Single w/Brakes
GT 205 SF	GM 3500S	Single w/Brakes
GLS 195	GM 3500S	Single w/Brakes
GLS 215	GM 4000T	Tandem w/Brakes One Axle
GLS 235	GM 5200T	Tandem w/Brakes One Axle
GLS 255	GM 5800T	Tandem w/Brakes One Axle
DS 205	GM 4000T	Tandem w/Brakes One Axle
DS 215	GM 5200T	Tandem w/Brakes One Axle
DX 215	GM 5200T	Tandem w/Brakes One Axle
DX 235	GM 5800T	Tandem w/Brakes One Axle
GS 209	GM 4000T	Tandem w/Brakes One Axle
GS 249 (Non-Package)	GM 5800T	Tandem w/Brakes One Axle
GS 259 (Non-Package)	GM 7500T	Tandem w/Brakes One Axle
GS 289 (Non-Package)	GM 7500T	Tandem w/Brakes One Axle

### 2011 Standard MX/SSV Model Features:

Black, Blue or Red Paint, Hydraulic Drum Brakes, Carlisle Bias Tires, Ultra Silver Painted Wheels, Swing Tongue

### 2011 Standard Features on All Other Models:

Choice of Matching Color, Double Stripe, Hydraulic Disc Brakes, Carlisle Bias Tires, Angle Wrap Front/Full Rear Step, Chrome Wheels, Aluminum Tread Plate on Steps, Swing Tongue, Rear Tie Downs

## EZ Loader Standard Galvanized Bunk Trailers

Glastron Boat Model	Trailer Model
SSV 170	EZL90B 15-16 2100DIX
SSV 175	EZL96B 15-18 2450DIX
MX 180	EZL96B 15-18 3100DIX
MX 185	EZL96B 15-18 3100DIX
GT 180	EZL96B 15-18 3100DIX
GT 185	EZL96B 15-18 3100DIX
GT 205	TEZL96B 17-20 4000DIX
GT 225	TEZL96B 17-20 4000DIX
GT 185 SF	EZL96B 15-18 3100DIX
GT 205 SF	TEZL96B 17-20 4000DIX
GLS 195	TEZL96B 17-20 4000DIX
GLS 215	TEZL96B 17-20 4000DIX
GLS 235	TEZL96B 19-22 4700DIX
GLS 255	TEZB 23-25/27 5800DIX
DS 205	TEZL96B 17-20 4000DIX
DS 215	TEZB 19-22 5200DIX
DX 215	TEZB 19-22 5200DIX
DX 235	TEZL96B 17-20 4000DIX
GS 209	TEZB 19-22 5200DIX
GS 249 (Non-Package)	TEZL96B 17-20 4000DIX
GS 259 (Non-Package)	TEZB 23-25 5800DIX
GS 289 (Non-Package)	TEZB 25-27 7500DIX
	TEZB 25-27 8500DIX

## Monthly Payments

Length of Loan	Interest Rate	Payment Per \$1000
3 years	6.00%	30.42
	6.50%	30.65
	7.00%	30.88
	7.50%	31.11
	8.00%	31.34
	8.50%	31.57
5 years	9.00%	31.80
	6.00%	19.33
	6.50%	19.57
	7.00%	19.80
	7.50%	20.04
	8.00%	20.28
7 years	8.50%	20.52
	9.00%	20.76
	6.00%	14.61
	6.50%	14.85
	7.00%	15.09
	7.50%	15.34
8 years	8.00%	15.59
	8.50%	15.84
	9.00%	16.09
	6.00%	13.14
	6.50%	13.39
	7.00%	13.63
10 years	7.50%	13.88
	8.00%	14.14
	8.50%	14.39
	9.00%	14.65
	6.00%	11.10
	6.50%	11.35
12 years	7.00%	11.61
	7.50%	11.87
	8.00%	12.13
	8.50%	12.40
	9.00%	12.67
	6.00%	9.76
15 years	6.50%	10.02
	7.00%	10.28
	7.50%	10.55
	8.00%	10.82
	8.50%	11.10
	9.00%	11.38
	6.00%	8.44
	6.50%	8.71
	7.00%	8.99
	7.50%	9.27
	8.00%	9.56
	8.50%	9.85
	9.00%	10.14

## Definitions of Measurements

- Length Overall (LOA)** — Distance along the centerline from the tip of the bow to the aft-most part of the hull.
- Maximum Beam** — Maximum width of the boat.
- Transom Width** — Maximum width of the boat at the transom.
- Depth** — Vertical distance from the lowest point of the keel to the highest point of the boat, excluding windshields, lights and other removable components.
- Transom Deadrise** — Angle of the hull at the transom, as measured in degrees, relative to the water.
- Maximum Depth** — Vertical distance from the lowest point of the keel to the highest point of the boat, including windshields.
- Cockpit Depth** — Vertical distance from the boat floor to the top of gunwale as measured at the driver's seat.
- Length Overall on Trailer** — Distance measured along the boat centerline, from forward-most point of trailer to aft-most point of motor/outdrive.
- Boat Height on Trailer** — Vertical distance from the ground to the highest point of boat, including the windshield.
- Draft (drive unit up)** — Total number of inches of boat and/or motor and drive unit below the waterline. Measured unloaded, with the motor/drive unit in the full up position.
- Draft (drive unit down)** — Total number of inches of boat and/or motor and drive unit below the waterline. Measured unloaded, with the motor/drive unit in the full down position.

**Specifications**  
 Length 18' 11" (5.76 m.)  
 Beam 30" (76.2 cm.)  
 Depth 15" (38.1 cm.)  
 Max. Weight 1200 lbs (544 kg.)  
 Max. Draft 28 1/2" (72.6 cm.)  
**Standard Features**  
 A. Drive Unit Up 15 1/2" (39.4 cm.)  
 B. Drive Unit Down 28 1/2" (72.6 cm.)

**Transom Width** 86" (2.18 m.)  
**Transom Deadrise** 21°  
**LOA on Trailer** 21' 6" (6.55 m.)  
**Fuel Capacity** 23 gallons (87 L.)  
**Maximum Load** 1750 lbs (794 kg.)  
**Max. Persons** 7 or 1100 lbs. (499 kg.)

## Standard Features

Molded swim platform  
 Passenger grab handles  
 Single cable steering  
 Ski locker  
 SL seating: 2 bucket seats/aft bench seat  
 Stainless steel boarding ladder  
 Stainless steel bow & stern eyes  
 Stern storage under aft bench seat

## Optional Features

Mooring cover  
 Ski tow pylon  
 Snap-in carpet

## Color Choices

White w/Laser Red Gelcoat & Silver/  
 Chrome Graphics

## Engine Choices

Evinrude 75 DSLSE Included  
 Evinrude 90 DSLSE  
 Evinrude 115 DSLSE  
 Mercury 90 ELPTO Optimax  
 Mercury 115 ELPTO Optimax  
 Yamaha F 90 TLR  
 Yamaha F 115 TLR

## Performance

**Engine: Evinrude 75 E-Tec, Prop: 15 pitch**

rpm	mph	gph	range*
2000	7	—	—
3000	18	—	—
4000	25	—	—
5000	31	—	—
WOT	33-35	—	—

Time to plane: 2.9 seconds

Acceleration 0-20 MPH: 4.0 seconds

**Engine: Evinrude 90 E-Tec, Prop: 15 pitch**

rpm	mph	gph	range*
2000	7	1.4	111
3000	17	2.7	131
4000	26	4.8	112
5000	33	7.3	96
WOT	34-36	7.9	92

Time to plane: 2.5 seconds

Acceleration 0-20 MPH: N/A\*

- \* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.
- \*\* Not available.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

## Specifications

<b>Length</b> 17' 1" (5.21 m.)	<b>Transom Deadrise</b> 21°
<b>Beam</b> 88" (2.24 m.)	<b>LOA on Trailer</b> 21' 10" (6.65 m.)
<b>Depth</b> 44" (1.12 m.)	<b>Fuel Capacity</b> 23 gallons (87 L.)
<b>Approx Weight</b> 2040 lbs (925 kg.)	<b>Maximum Load</b> 1100 lbs (499 kg.)
<b>Cockpit Depth</b> 28 1/2" (.72 m.)	<b>Max. Persons</b> 7 or 1100 lbs. (499 kg.)
<b>Transom Width</b> 86" (2.18 m.)	
<b>Draft:</b> <b>A. Drive Unit Up</b> 16" (.41 m.)	
<b>B. Drive Unit Down</b> 31" (.79 m.)	

## Standard Features

AM/FM stereo w/2 speakers w/MP3 adapter & glove box door	Merc/Volvo prop
Bilge pump & blower	Molded swim platform
Bow seats w/molded storage & seat latches	Passenger grab handles
Bucket seats/aft bench/sunlounge	Rear bench seating w/concealed storage
Cleats	Ski locker
Electric horn	Ski tow ring
Fiberglass floor	SL Seating: 2 bucket seats/aft bench seat/sunlounge
Forward bow cushion	Stainless steel boarding ladder
Forward pull-up bow cleat	Stainless steel bow & stern eyes
Full glass windshield	Stern storage under aft bench seat
Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter & engine temperature gauges; plus switches for bilge pump, blower, horn & lights	

## Optional Features

Black Bimini top & boot	Mooring cover
Black bow cover	Snap-in carpet
Black cockpit cover	

## Color Choices

White w/Royal Blue Gelcoat & Silver/Chrome Graphics	White w/Laser Red Gelcoat & Silver/Chrome Graphics
---	--

## Engine Choices

3.0L MerCruiser (WPS) (135 hp)  
3.0L MPI EC MerCruiser (WPS) (135 hp)

## Performance

Engine: 3.0L MerCruiser (WPS)(135), Prop: 19 pitch

rpm	mph	gph	range*
2000	8	—	—
3000	22	—	—
4000	33	—	—
WOT	39-41	—	—

Time to plane: 2.8 seconds

Acceleration 0-20 MPH: 3.9 seconds

\* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.



## Specifications

**Length** 17' 1" (5.21 m.)  
**Beam** 88" (2.24 m.)  
**Depth** 43" (1.12 m.)  
**Maximum Depth** 57" (1.45 m.)  
**Cockpit Depth** 28 1/2" (.72 m.)  
**Approx. Wt.** 1800 lbs. (1035 kg.)  
 w/3.0 GL Volvo Penta  
**Draft:** A. Drive Unit Up 16" (.41 m.)  
 B. Drive Unit Down 31" (.79 m.)

**Transom Width** 86" (2.18 m.)  
**Transom Deadrise** 21°  
**LOA on Trailer** 21' 6" (6.65 m.)  
**Fuel Capacity** 23 gal. (87 L.)  
**Maximum Load** 1800 lbs. (499 kg.)  
**Max. Persons** 8 or 1000 lbs. (454 kg.)  
**NMMA Certified**

## Standard Features

**AM/FM stereo** w/2 speakers w/MP3 adaptor & glove box w/stainless steel hinges & latch  
**Bilge pump & blower**  
**Bow seats** w/molded storage & seat latch Cleats  
**Drink cup holders**  
**Electric horn**  
**Fiberglass floor** w/built-in footrests & floor drains  
**Hinged ski locker lid**  
 Instrument panel includes: speedometer, tachometer & fuel gauges; plus switches for bilge pump, navigation/anchor lights, horn & accessories  
 Merc/Volvo prop  
 Molded swim platform  
 Navigational lighting  
 Ski locker mat  
 SL Seating: 2 bucket seats/aft bench seat/sunlounge  
 Stainless steel boarding ladder  
 Stainless steel bow & stern eyes  
 Walk-thru curved windshield w/o full glass side wings

## Optional Features

3-step boarding ladder  
 Color coordinated bow cover  
 Color coordinated Canvas Package: bow cover, walk-thru curtain, side curtains & stern curtains  
 Color-coordinated Bimini Top & Boot  
 Color-coordinated cockpit cover  
 Color-coordinated soft top & boot  
 Convenience Package: hour meter, depth sounder  
 Flip-up bucket seat (1)  
 Flip-up bucket seats (2)  
 Full side glass wings  
 Mooring cover  
 Ski tow pylon  
 Snap-in carpet  
 Tilt steering  
 XL Package: snap-in carpet, full side glass, convenience package, flip-up bucket seat (1), fwd bow cushion, ski tow pylon, fwd bow pull-up cleat, SS rubrail insert/horn grill, tilt steering

## Color Choices

White w/Jet Black Gelcoat & Silver/Chrome Graphics  
 White w/Laser Red Gelcoat & Silver/Chrome Graphics  
 White w/Royal Blue Gelcoat & Silver/Chrome Graphics

## Engine Choices

Evinrude 90 DSLSE  
 Evinrude 115 DSLSE  
 Evinrude 150 DSLSE  
 Yamaha F90 TLR  
 Yamaha F115 TLR  
 Yamaha F150 TLR  
 Mercury 90 ELPT Optimax  
 Mercury 115 ELPT Optimax  
 Mercury 135 ELPT Optimax  
 Mercury 150 ELPT Optimax

## Performance

### Engine: Evinrude E-TEC 115 FastStrike: 19 pitch

rpm	mph	gph	range*
2500	15	2.9	107
3200	25	4.2	123
4200	35	6.3	115
WOT	43-45	—	—

Time to plane: 3.5 seconds

Acceleration 0-20 MPH: N/A\*\*

### Engine: Evinrude E-TEC 150 FastStrike: 19 pitch

rpm	mph	gph	range*
2400	15	3.7	84
3200	30	5.0	124
4200	40	7.5	110
WOT	49-52	—	—

Time to plane: 3.2 seconds

Acceleration 0-20 MPH: N/A\*\*

\* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

\*\* Not available.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

## Specifications

**Length** 18' 5" (5.21 m.)  
**Beam** 88" (2.24 m.)  
**Depth** 44" (1.12 m.)  
**Maximum Depth** 57" (1.45 m.)  
**Cockpit Depth** 28 1/2" (.72 m.)  
**Approx. Wt.** 2280 lbs. (1035 kg.)  
 w/3.0 GL Volvo Penta

**Transom Width** 86" (2.18 m.)  
**Transom Deadrise** 21°  
**LOA on Trailer** 21' 10" (6.65 m.)  
**Fuel Capacity** 23 gal. (87 L.)  
**Maximum Load** 1100 lbs. (499 kg.)  
**Max. Persons** 7 or 1000 lbs. (454 kg.)  
**NMMA Certified**

**Draft:** A. Drive Unit Up 16" (.41 m.)  
 B. Drive Unit Down 31" (.79 m.)

## Standard Features

**AM/FM stereo w/2 speakers w/MP3**  
 adaptor & glove box door w/stainless steel hinges & latch  
**Bilge pump & blower**  
**Bow seats w/molded storage & seat latch**  
**Cleats**  
**Drink cup holders**  
**Electric horn**  
**Extended swim platform w/3-step ladder**  
**Fiberglass floor w/built-in footrests & floor drains**  
**Hinged ski locker lid**

Instrument panel includes: speedometer, tachometer & fuel gauges; plus switches for bilge pump, navigation/anchor lights, horn & accessories  
 Merc/Volvo prop  
 Navigational lighting  
 Ski locker mat  
 Ski tow ring  
 SL Seating: 2 bucket seats/aft bench seat/sunlounge  
 Stainless steel boarding ladder  
 Stainless steel bow & stern eyes  
 Walk-thru curved windshield w/o full glass side wings

## Optional Features

**Color-coordinated Bimini top & boot**  
**Color-coordinated bow cover**  
**Color-coordinated Canvas Package:**  
 bow cover, walk-thru curtain, side curtains & stern curtain  
**Color-coordinated cockpit cover**  
**Color-coordinated soft top & boot**  
**Convenience package:** hour meter, depth sounder  
**Flip-up bucket seat (1)**

Flip-up bucket seats (2)  
 Full side glass wings  
 Mooring cover  
 Snap-in carpet  
 Tilt steering  
 XL Pkg: snap-in carpet, full side glass, convenience package, flip-up bucket seat, fwd bow cushion, fwd pull-up cleat, SS rubrail insert/horn grill, tilt steering

## Color Choices

White w/Jet Black Gelcoat & Silver/Chrome Graphics  
 White w/Laser Red Gelcoat & Silver/Chrome Graphics  
 White w/Royal Blue Gelcoat & Silver/Chrome Graphics

## Engine Choices

3.0L MerCruiser (135 hp)  
 3.0L MPI EC MerCruiser (WPS) (135 hp)  
 4.3L MerCruiser (190 hp)

4.3L MPI EC MerCruiser (220 hp)  
 4.3 GL Volvo Penta (190 hp)

## Performance

Engine: 3.0L MerCruiser, Prop: 21 pitch

rpm	mph	gph	range*
2000	8	2.1	99
3000	25	3.2	129
4000	37	7.6	95
WOT	41-43	—	—

Time to plane: 4.2 seconds  
 Acceleration 0-20 MPH: 7.4 seconds

Engine: 4.3 GL Volvo Penta, Prop: 23 pitch

rpm	mph	gph	range*
2000	8	—	—
3000	32	—	—
4000	44	—	—
WOT	48-50	—	—

Time to plane: 3.2 seconds  
 Acceleration 0-20 MPH: 6.1 seconds

Engine: 4.3L MerCruiser, Prop: 23 pitch

rpm	mph	gph	range*
2400	15	3.0	104
3200	35	5.0	145
4000	45	8.5	110
WOT	48-50	—	—

Time to plane: 3.5 seconds  
 Acceleration 0-20 MPH: N/A\*\*

\* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

\*\* Not available.

SAME Hull/Deck as  
GT185

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

## Specifications

**Length** 17' 1" (5.21 m.)  
**Beam** 88" (2.24 m.)  
**Depth** 43" (1.09 m.)  
**Maximum Depth** 59" (1.50 m.)  
**Cockpit Depth** 28 1/2" (.72 m.)  
**Approx. Wt.** 1500 lbs. (680 kg.)  
 w/o engine  
**Transom Width** 86" (2.18 m.)  
**Draft:** **A. Drive Unit Up** 15 1/2" (.39 m.)  
**B. Drive Unit Down** 28 1/2" (.72 m.)

**Transom Deadrise** 21°  
**LOA on Trailer** 21' 6" (6.55 m.)  
**Fuel Capacity** 23 gal. (87 L.)  
**Maximum Load** 1800 lbs. (816 kg.)  
**Max. Persons** 8 or 1150 lbs. (522 kg.)  
**Max. Horsepower** 150 (112 kw.)  
 NMMA Certified

## Standard Features

AM/FM Sirius satellite-ready stereo  
 w/2 speakers, MP3 adaptor  
 Bilge pump  
 Bow seats w/molded storage & seat latch  
 Built-in cockpit side storage  
 Cleats  
 Custom non-directional steering wheel  
 Drink cup holders  
 Dual cable steering  
 Electric horn  
 Fiberglass floor w/built-in footrests &  
 floor drains  
 Glove box w/stainless steel hinge & latch  
 Hinged ski locker lid

Instrument panel includes: speedometer,  
 tachometer & fuel gauges; plus  
 switches for bilge pump, navigation/  
 anchor lights, horn & accessories  
 Molded swim platform  
 Navigational lighting  
 Ski locker mat  
 SL seating: 2 bucket seats/aft bench seat  
 w/sunlounge  
 Stainless steel boarding ladder  
 Stainless steel bow & stern eyes  
 Synthetic passenger grab handles  
 Two-tone deck stripe & tape hull graphics  
 Walk-thru curved windshield w/o  
 full glass side wings

## Optional Features

3-step boarding ladder  
 Color-coordinated Bimini top & boot  
 Color-coordinated bow cover  
 Color-coordinated Canvas Package:  
 bow cover, walk-thru curtain, side  
 curtains & stern curtains  
 Color-coordinated cockpit cover  
 Color-coordinated soft top & boot  
 Convenience Package: automatic bilge  
 pump, hour meter, depth sounder  
 Flip-up bucket seat (1)  
 Flip-up bucket seats (2)  
 Full side glass wings

Mooring cover  
 Ski tow pylon  
 Snap-in carpet  
 Tilt steering wheel  
 XL Pkg: 3-step ladder, snap-in carpet,  
 tilt steering, Conv. pkg., full glass  
 windshield, flip-up bucket seat (1),  
 SS rubrail/drink holders, SS speaker  
 covers, SS thru-hull fittings, SS horn  
 grill, SS grab handles, pull-up fwd bow  
 cleat, ski tow pylon

(All canvas choices except mooring cover are color-coordinated fabric)

## Color Choices

White w/Jet Black Gelcoat & Silver/Chrome Graphics  
 White w/Laser Red Gelcoat & Silver/Chrome Graphics  
 White w/Royal Blue Gelcoat & Silver/Chrome Graphics  
 White w/Electric Yellow Gelcoat & Silver/Chrome Graphics

## Engine Choices

Evinrude 90 DSLSE  
 Evinrude 115 DSLSE  
 Evinrude 150 DSLSE  
 Yamaha F 90 TLR  
 Yamaha F 115 TLR  
 Yamaha F 150 TLR

Mercury 90 ELPT Optimax  
 Mercury 115 ELPT Optimax  
 Mercury 135 L Optimax  
 Mercury 150 L Optimax

## Performance

Engine: Evinrude E-TEC 115 FastStrike: 19 pitch

rpm	mph	gph	range*
2500	15	2.9	107
3200	25	4.2	123
4200	35	6.3	115
WOT	43-45	—	—

Time to plane: 3.5 seconds  
 Acceleration 0-20 MPH: N/A\*\*

Engine: Evinrude E-TEC 150 FastStrike: 19 pitch

rpm	mph	gph	range*
2400	15	3.7	84
3200	30	5.0	124
4200	40	7.5	110
WOT	49-52	—	—

Time to plane: 3.2 seconds  
 Acceleration 0-20 MPH: N/A\*\*

\* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

\*\* Not available.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

## Specifications

<b>Length</b> 18' 5" (5.61 m.)	<b>Transom Deadrise</b> 21°
<b>Beam</b> 88" (2.24 m.)	<b>Transom Width</b> 86" (2.18 m.)
<b>Depth</b> 44" (1.12 m.)	<b>LOA on Trailer</b> 21' 10" (6.65 m.)
<b>Maximum Depth</b> 59" (1.50 m.)	<b>Fuel Capacity</b> 23 gal. (87 L.)
<b>Cockpit Depth</b> 28 1/2" (.72 m.)	<b>Maximum Load</b> 1150 lbs. (522 kg.)
<b>Approx. Wt.</b> 2315 lbs. (1050 kg.)	<b>Max. Persons</b> 8 or 1150 lbs. (522 kg.)
w/3.0 GL Volvo Penta	<b>NMMA Certified</b>
<b>Draft:</b> A. Drive Unit Up 16" (.41 m.)	
B. Drive Unit Down 31" (.79 m.)	

## Standard Features

AM/FM Sirius satellite-ready stereo w/2 speakers, MP3 adaptor	Instrument panel includes: speedometer, tachometer & fuel gauges; plus switches for bilge pump, navigation/anchor lights, horn & accessories
Automatic bilge pump	Merc/Volvo prop
Bow seats w/molded storage & seat latch	Navigational lighting
Built-in cockpit side storage	Ski locker mat
Cleats	Ski tow ring
Custom non-directional wood grain steering wheel	SL seating: 2 bucket seats/aft bench seat/sunlounge
Drink cup holders	Stainless steel boarding ladder
Electric horn	Stainless steel bow & stern eyes
Extended swim platform w/3-step ladder	Synthetic passenger grab handles
Fiberglass floor w/built-in footrests & floor drains	Two-tone deck stripe & tape hull graphics
Glove box w/stainless steel hinge & latch	Walk-thru curved windshield
Hinged ski locker lid	

## Optional Features

Color-coordinated Bimini top & boot	Flip-up bucket seats (2)
Color-coordinated Bimini top for wakeboard tower	Full side glass wings
Color-coordinated bow cover	Mooring cover
Color-coordinated Canvas Package: bow cover, walk-thru curtain, side curtains & stern curtain	Roswell Wakeboard Tower (factory installed)
Color-coordinated cockpit cover	Snap-in carpet
Color-coordinated soft top & boot	Tilt steering wheel
Convenience Package: hour meter & depth sounder	XL Pkg: 3-step ladder, snap-in carpet, tilt steering, Conv. pkg., full glass windshield, flip-up bucket seat (1), SS rubrail insert, SS drink holders, SS speaker covers, SS thru-hull fittings, SS horn grill, SS grab handles, pull-up fwd bow cleat, SS intake/exhaust vents
Deck reinforcement for Roswell Tower (dealer installed)	
Flip-up bucket seat (1)	

(All canvas choices except mooring cover are color-coordinated fabric)

## Color Choices

- White w/Electric Yellow Gelcoat & Silver/Chrome Graphics
- White w/Jet Black Gelcoat & Silver/Chrome Graphics
- White w/Royal Blue Gelcoat & Silver/Chrome Graphics
- White w/Laser Red Gelcoat & Silver/Chrome Graphics

## Engine Choices

- 3.0L MerCruiser (WPS) (135 hp)
- 3.0L MPI EC MerCruiser (WPS) (135 hp)
- 4.3L MerCruiser (190 hp)
- 4.3L MPI EC MerCruiser (220 hp)
- 4.3 GL Volvo Penta (190 hp)

## Performance

### Engine: 3.0L MerCruiser, Prop: 21 pitch

rpm	mph	gph	range*
2000	8	2.1	99
3000	25	3.2	129
4000	37	7.6	95
WOT	41-43	—	—

Time to plane: 4.2 seconds

Acceleration 0-20 MPH: 7.4 seconds

### Engine: 4.3L MerCruiser, Prop: 23 pitch

rpm	mph	gph	range*
2400	15	3.0	104
3200	35	5.0	145
4000	45	8.5	110
WOT	48-50	—	—

Time to plane: 3.5 seconds

Acceleration 0-20 MPH: N/A\*\*

### Engine: 4.3 GL Volvo Penta, Prop: 23 pitch

rpm	mph	gph	range*
2000	8	—	—
3000	32	—	—
4000	44	—	—
WOT	48-50	—	—

Time to plane: 3.2 seconds

Acceleration 0-20 MPH: 6.1 seconds

\* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

\*\* Not available.

Same Hull/Deck as  
m x 185

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

## Specifications

<b>Length</b> 20' 8" (6.30 m.)	<b>Transom Deadrise</b> 21°
<b>Beam</b> 92" (2.33 m.)	<b>Transom Width</b> 88" (2.24 m.)
<b>Depth</b> 43" (1.09 m.)	<b>LOA on Trailer</b> 24' 6" (7.46 m.)
<b>Maximum Depth</b> 56" (1.42 m.)	<b>Fuel Capacity</b> 35 gal. (132 L.)
<b>Cockpit Depth</b> 29" (.74 m.)	<b>Maximum Load</b> 1275 lbs. (578 kg.)
<b>Approx. Wt.</b> 2750 lbs. (1247 kg.)	<b>Max. Persons</b> 9 or 1275 lbs. (578 kg.)
w/4.3L MerCruiser	<b>NMMA Certified</b>
<b>Draft: A. Drive Unit Up</b> 16 1/2" (.42 m.)	
<b>B. Drive Unit Down</b> 31 1/2" (.80 m.)	

## Standard Features

AM/FM Sirius satellite-ready stereo w/2 speaker covers, MP3 adaptor	Instrument panel includes: speedometer, tachometer & fuel gauges; plus switches for bilge pump, navigation/ anchor lights, horn & accessories
Automatic bilge pump	Merc/Volvo prop
Bow seats w/molded storage & seat latch	Padded sunlounge
Built-in cockpit side storage	Ski locker mat
Cleats	Ski tow ring
Custom non-directional wood grain steering wheel	SL seating: 2 bucket seats/aft bench seat w/sunlounge
Drink cup holders	Stainless steel bow & stern eyes
Electric horn	Synthetic passenger grab handles
Extended swim platform w/stainless steel 3-step boarding ladder	Two-tone deck stripe & tape hull graphics
Fiberglass floor w/built-in footrests & floor drains	Walk-thru full glass windshield w/o full side wings
Glove box w/stainless steel hinge & latch	
Hinged ski locker lid w/latch	

## Optional Features

Color-coordinated Bimini top & boot	Flip-up bucket seats (2)
Color-coordinated Bimini top for wakeboard tower	Full side glass wings
Color-coordinated bow cover	Mooring cover
Color-coordinated Canvas Package: bow cover, walk-thru curtain, side curtains & stern curtain	Roswell Wakeboard Tower (factory installed)
Color-coordinated cockpit cover	Snap-in carpet
Color-coordinated soft top & boot	Tilt steering wheel
Convenience Package: hour meter & depth sounder	XL Pkg: snap-in carpet, tilt steering, Conv. pkg., full glass windshield, flip-up bucket seat (1), SS rubrail insert, SS drink holders, SS speaker covers, SS thru-hull fittings, SS horn grill, SS grab handles, pull-up fwd bow cleat, SS intake/exhaust vents
Deck reinforcement for Roswell Tower (dealer installed)	
Flip-up bucket seat (1)	

*(All canvas choices except mooring cover are color-coordinated fabric)*

## Color Choices

White w/Laser Red Gelcoat & Silver/Chrome Graphics  
 White w/Jet Black Gelcoat & Silver/Chrome Graphics  
 White w/Royal Blue Gelcoat & Silver/Chrome Graphics  
 White w/Electric Yellow Gelcoat & Silver/Chrome Graphics

## Engine Choices

4.3L MerCruiser (190 hp)	4.3 GL Volvo Penta (190 hp)
4.3L MPI MerCruiser (220 hp)	4.3 GXi Volvo Penta (225 hp)
4.3L MPI EC MerCruiser (220 hp)	5.0 GXi Volvo Penta (270 hp)
5.0L MPI EC MerCruiser (260 hp)	5.0 GXiC Volvo Penta (270 hp)

## Performance

### Engine: 4.3L MerCruiser, Prop: 23 pitch

rpm	mph	gph	range*
2000	15	2.8	169
3000	25	3.8	207
4000	35	6.9	160
WOT	47-49	—	—

Time to plane: 3.5 seconds

Acceleration 0-20 MPH: N/A\*\*

### Engine: 5.0 GXi Volvo Penta, Prop: 21 pitch

rpm	mph	gph	range*
2000	13	3.6	114
3000	31	6.5	149
4000	45	11.0	130
WOT	55-58	—	—

Time to plane: 2.8 seconds

Acceleration 0-20 MPH: N/A\*\*

\* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

\*\* Not available.

*Performance data is measured with two passengers,  
3/4 to full tank of fuel, at altitudes of 0 to 1200 feet.*

*Actual performance will be affected by higher altitude, load,  
weather/water conditions, and optional equipment, such as  
wakeboard tower, extended swim platform and generator.*

**ET 225 BOWRIDER**

**Specifications**

- Transom Width 92" (2.34 m.)
- Transom Deadrise 21°
- LOA on Trailer 25' 4" (7.72 m.)
- Fuel Capacity 35 gal. (132 L.)
- Maximum Load 1475 lbs. (669 kg.)
- Max. Persons 10 or 1475 lbs. (669 kg.)
- NMMA Certified
- Drive Unit Up 16 1/2" (.42 m.)
- Drive Unit Down 31 1/2" (.80 m.)

**Standard Features**

- Hinged ski locker lid
- Instrument panel includes: speedometer, tachometer & fuel gauges; plus switches for bilge pump, navigation/anchor lights, horn & accessories
- Merc/Volvo prop
- Navigational lighting
- Seating: 2 bucket seats/U-shaped seating w/sunlounge & walk-thru transome
- Ski locker mat
- Ski tow ring
- Stainless steel bow & stern eyes
- Synthetic passenger grab handles
- Two-tone deck stripe & tape hull graphics
- Walk-thru curved windshield w/o full glass side wings

**Optional Features**

- Flip-up bucket seat (1)
- Flip-up bucket seats (2)
- Mooring cover
- Roswell Wakeboard Tower (factory installed)
- Snap-in carpet
- XL Pkg: snap-in carpet, tilt steering, Conv. pkg., full glass windshield, flip-up bucket seat (1), SS rubrail insert, SS drink holders, SS speaker covers, SS thru-hull fittings, SS horn grill, SS grab handles, pull-up cleats, SS intake/exhaust vents

**Color Choices**

- Gelcoat & Silver/Chrome Graphics
- Gelcoat & Silver/Chrome Graphics
- Gelcoat & Silver/Chrome Graphics
- Gelcoat & Silver/Chrome Graphics

**Engine Choices**

- 5.0L MerCruiser (260 hp)
- 5.0L MPI EC MerCruiser (260 hp)
- 350 Mag. MPI MerCruiser(300 hp)
- 350 Mag. MPI EC Alpha MerCruiser(300 hp)
- 5.0 GXi Volvo Penta (270 hp)
- 5.0 GXiC Volvo Penta (270 hp)
- 5.7 Gi Volvo Penta (300 hp)
- 5.7 GIC Volvo Penta (300 hp)

**Performance**

**Engine: 5.0 GXi Volvo Penta, Prop: 19 pitch**

rpm	mph	gph	range*
2000	9	3.7	77
3000	28	6.4	137
4000	39	11.4	109
WOT	51-53	—	—

Time to plane: 2.9 sec.  
Acceleration 0-20 MPH: 4.3 seconds

**Engine: 5.0L MPI MerCruiser, Prop: 21 pitch**

rpm	mph	gph	range*
2000	9	4.4	64
3000	29	8.4	109
4000	35	13.2	84
WOT	48-50	—	—

Time to plane: 2.9 sec.  
Acceleration 0-20 MPH: 6.8 seconds

\* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet. Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

**Standard Features**  
 • 120-watt stereo ready stereo  
 • Merc/Volvo prop  
 • Navigational lighting  
 • Rear bench seat  
 • Reversible bow seats/fishing deck  
 • Rod holder on port side  
 • Seating: 2 bucket seats/2 removable fishing seats/aft bench seat  
 • Ski locker mat  
 • Ski tow ring  
 • Stainless steel boarding ladder  
 • Stainless steel bow & stern eyes  
 • Starboard net storage box  
 • Synthetic passenger grab handles  
 • Trolling motor mount  
 • Two-tone deck stripe & tape hull graphics  
 • Walk-thru curved windshield

**Optional Features**  
 • Flip-up bucket seat (1)  
 • Flip-up bucket seats (2)  
 • Full side glass wings  
 • Mooring cover  
 • Roswell Wakeboard Tower (factory installed)  
 • Snap-in carpet  
 • Tilt steering wheel  
 • XL Pkg: snap-in carpet, tilt steering, Conv. pkg., flip-up bucket seat (1), SS rubrail insert, SS drink holders, SS speaker covers, SS thru-hull fittings, SS horn grill, SS grab handles, SS intake/exhaust vents

**Color Choices**  
 • White w/Black Gelcoat & Silver/Chrome Graphics  
 • White w/Royal Blue Gelcoat & Silver/Chrome Graphics  
 • White w/Royal Red Gelcoat & Silver/Chrome Graphics  
 • White w/Electric Yellow Gelcoat & Silver/Chrome Graphics

**Transom Deadrise** 21°  
**Transom Width** 86" (2.18 m.)  
**LOA on Trailer** 21' 10" (6.65 m.)  
**Fuel Capacity** 23 gal. (87 L.)  
**Maximum Load** 1150 lbs. (522 kg.)  
**Max. Persons** 8 or 1150 lbs. (522 kg.)  
**NMMA Certified**

**A. Drive Unit Up** 16" (41 m.)  
**B. Drive Unit Down** 31" (79 m.)

**Standard Features**

Hinged ski locker lid  
 Merc/Volvo prop  
 Navigational lighting  
 Rear bench seat  
 Reversible bow seats/fishing deck  
 Rod holder on port side  
 Seating: 2 bucket seats/2 removable fishing seats/aft bench seat  
 Ski locker mat  
 Ski tow ring  
 Stainless steel boarding ladder  
 Stainless steel bow & stern eyes  
 Starboard net storage box  
 Synthetic passenger grab handles  
 Trolling motor mount  
 Two-tone deck stripe & tape hull graphics  
 Walk-thru curved windshield

**Optional Features**

Flip-up bucket seat (1)  
 Flip-up bucket seats (2)  
 Full side glass wings  
 Mooring cover  
 Roswell Wakeboard Tower (factory installed)  
 Snap-in carpet  
 Tilt steering wheel  
 XL Pkg: snap-in carpet, tilt steering, Conv. pkg., flip-up bucket seat (1), SS rubrail insert, SS drink holders, SS speaker covers, SS thru-hull fittings, SS horn grill, SS grab handles, SS intake/exhaust vents

**Color Choices**

White w/Black Gelcoat & Silver/Chrome Graphics  
 White w/Royal Blue Gelcoat & Silver/Chrome Graphics  
 White w/Royal Red Gelcoat & Silver/Chrome Graphics  
 White w/Electric Yellow Gelcoat & Silver/Chrome Graphics

**Engine Choices**

- 3.0L MerCruiser (WPS) (135 hp)
- 3.0L MPI EC MerCruiser (WPS) (135 hp)
- 4.3L MerCruiser (190 hp)
- 4.3L MPI EC MerCruiser (220 hp)
- 4.3 GL Volvo Penta (190 hp)

**Performance**

**Engine: 3.0L MerCruiser, Prop: 21 pitch**

rpm	mph	gph	range*
2000	8	2.1	99
3000	25	3.2	129
4000	37	7.6	95
WOT	41-43	—	—

Time to plane: 4.2 seconds  
 Acceleration 0-20 MPH: 7.4 seconds

**Engine: 4.3L MerCruiser, Prop: 23 pitch**

rpm	mph	gph	range*
2400	15	3.0	104
3200	35	5.0	145
4000	45	8.5	110
WOT	48-50	—	—

Time to plane: 3.5 seconds  
 Acceleration 0-20 MPH: N/A\*\*

**Engine: 4.3 GL Volvo Penta, Prop: 23 pitch**

rpm	mph	gph	range*
2000	8	—	—
3000	32	—	—
4000	44	—	—
WOT	48-50	—	—

Time to plane: 3.2 seconds  
 Acceleration 0-20 MPH: 6.1 seconds

\* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.  
 \*\* Not available.

*SAME Hull/Deck as Mx185*

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet. Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

**Specifications**

**Transom Deadrise** 21°  
**Transom Width** 88" (2.24 m.)  
**LOA on Trailer** 24' 6" (7.46 m.)  
**Fuel Capacity** 35 gal. (132 L.)  
**Maximum Load** 1275 lbs. (578 kg.)  
**Max. Persons** 9 or 1275 lbs. (578 kg.)  
**NMMA Certified**  
**A. Drive Unit Up** 16 1/2" (.42 m.)  
**B. Drive Unit Down** 31 1/2" (.80 m.)

**Standard Features**

Instrument panel includes: speedometer, tachometer & fuel gauges; plus switches for bilge pump, navigation/anchor lights, horn & accessories  
 Merc/Volvo prop  
 Navigational lighting  
 Reversible bow seats/fishing deck  
 Seating: 2 bucket seats/2 removable fishing seats/ aft bench seat  
 Ski locker mat  
 Ski tow ring  
 Stainless steel bow & stern eyes  
 Starboard net storage  
 Swivel fishing seats for casting decks (2)  
 Synthetic passenger grab handles  
 Trolling motor mount  
 Two-tone deck stripe & tape hull graphics  
 Walk-thru curved windshield w/o full glass side wings

**Optional Features**

Flip-up bucket seat (1)  
 Flip-up bucket seats (2)  
 Full side glass wings  
 Mooring cover  
 Roswell Wakeboard Tower (factory installed)  
 Snap-in carpet  
 Tilt steering wheel  
 XL Pkg: snap-in carpet, tilt steering, Conv. pkg., flip-up bucket seat (1), SS rubrail insert, SS drink holders, SS speaker covers, SS thru-hull fittings, SS horn grill, SS grab handles, SS intake/exhaust vents

**Color Choices**

Yellow Gelcoat & Silver/Chrome Graphics  
 Blue Gelcoat & Silver/Chrome Graphics  
 Black Gelcoat & Silver/Chrome Graphics  
 Red Gelcoat & Silver/Chrome Graphics

**Engine Choices**

4.3L MerCruiser (190 hp)      4.3 GL Volvo Penta (190 hp)  
 4.3L MPI MerCruiser (220 hp)      4.3 GXi Volvo Penta (225 hp)  
 4.3L MPI EC MerCruiser (220 hp)      5.0 GXi Volvo Penta (270 hp)  
 5.0L MPI MerCruiser (260 hp)      5.0 GXiC Volvo Penta (270 hp)  
 5.0L MPI EC MerCruiser (260 hp)

**Performance**

**Engine: 4.3L MerCruiser, Prop: 23 pitch**

rpm	mph	gph	range*
2000	15	2.8	169
3000	25	3.8	207
4000	35	6.9	160
WOT	47-49	—	—

Time to plane: 3.5 seconds  
 Acceleration 0-20 MPH: N/A\*\*

**Engine: 5.0 GXi Volvo Penta, Prop: 21 pitch**

rpm	mph	gph	range*
2000	13	3.6	114
3000	31	6.5	149
4000	45	11.0	130
WOT	55-58	—	—

Time to plane: 2.8 seconds  
 Acceleration 0-20 MPH: N/A\*\*

\* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.  
 \*\* Not available.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.



## Specifications

**Length** 19' 4" (5.89 m.)  
**Beam** 94" (2.39 m.)  
**Depth** 49 1/2" (1.26 m.)  
**Maximum Depth** 62 1/2" (1.59 m.)  
**Cockpit Depth** 33 1/2" (.85 m.)  
**Approx. Wt.** 2915 lbs. (1322 kg.)  
 w/4.3 GL Volvo Penta  
**Draft:** A. Drive Unit Up 16" (.41 m.)  
 B. Drive Unit Down 29" (.74 m.)  
**Transom Deadrise** 21°  
**Transom Width** 90" (2.29 m.)  
**LOA on Trailer** 22' 4" (6.81 m.)  
**Fuel Capacity** 34 gal. (129 L.)  
**Maximum Load** 1350 lbs. (612 kg.)  
**Max. Persons** 9 or 1350 lbs. (612 kg.)  
 NMMMA Certified

## Standard Features

AM/FM Sirius satellite-ready stereo w/4 stainless steel speaker covers MP3 adaptor  
 Automatic bilge pump  
 Custom non-directional wood grain steering wheel  
 Deck reinforcement for Xtreme tower (dealer installed)  
 Full fiberglass floor w/built-in footrest & drains  
 Glove box w/stainless steel hinge & latch  
 Hinged ski locker lid w/latch  
 Instrument panel includes: 5" speedometer, 5" multi-function tachometer/fuel/trim gauge, 2" oil pressure/2" voltmeter/2" engine temperature gauges; plus switches for bilge pump, blower, navigation/anchor lights, courtesy lights, horn, depth sounder, stereo remote in dash, 12 volt outlet  
 Molded extended swim platform  
 Navigational lighting  
 Ski locker mat  
 Ski tow ring  
 Sl. Seating: Suspension/Aire adjustable bucket seats w/flip-up bolsters/ aft bench seat/sunlounge & stbd. walk-thru  
 Snap-in carpet  
 Stainless steel bow & stern eyes  
 Stainless steel control plate  
 Stainless steel courtesy lights  
 Stainless steel drink holders  
 Stainless steel passenger grab handles  
 Stainless steel pull-up cleats  
 Stainless steel rubrail insert  
 Stainless steel stern rails  
 Telescopic 3-step boarding ladder  
 Tilt steering wheel  
 Walk-thru full glass windshield w/full side wings

## Optional Features

Color-coordinated Bimini Canvas Package: bow cover, side curtains, walk-thru curtain, stern curtain & cleat connector  
 Color-coordinated Bimini top for wakeboard tower  
 Color-coordinated Bimini top & boot  
 Color-coordinated bow cover  
 Color-coordinated cockpit cover  
 Mooring cover  
 Premium Sound System: upgraded radio, 2 transom speakers, 2 radio remotes (bow & stern), amplifier, subwoofer & speaker switch  
 Stainless steel package: stainless steel stern logo plate, stainless steel bow plate & exhaust decals  
 Upgrade Package: docking lights, tilt/trim switch, hour meter, stainless steel transom shower  
 Xtreme wakeboard tower & rack

(All canvas choices except mooring cover are color-coordinated fabric)

## Color Choices

White w/Electric Yellow Gelcoat & Silver/Chrome Graphics  
 White w/Jet Black Gelcoat & Silver/Chrome Graphics  
 White w/Royal Blue Gelcoat & Silver/Chrome Graphics  
 White w/Laser Red Gelcoat & Silver/Chrome Graphics

## Engine Choices

4.3L MerCruiser (190 hp)  
 4.3L MPI MerCruiser (220 hp)  
 4.3L MPI EC MerCruiser (220 hp)  
 5.0L MPI MerCruiser (260 hp)  
 5.0L MPI EC MerCruiser (260 hp)  
 4.3 GL Volvo Penta (190 hp)  
 4.3 GXi Volvo Penta (225 hp)  
 5.0 GXi Volvo Penta (270 hp)  
 5.0 GXiC Volvo Penta (270 hp)

## Performance

Engine: 4.3 GXi Volvo Penta, Prop: 23 pitch

rpm	mph	gph	range*
2000	8	—	—
3000	29	—	—
4000	43	—	—
WOT	52-55	—	—

Time to plane: 3.2 seconds

Acceleration 0-20 MPH: 5.3 seconds

\* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

## Specifications

**Length** 21' 4" (6.50 m.)  
**Beam** 101" (2.57 m.)  
**Depth** 52" (1.32 m.)  
**Maximum Depth** 65" (1.65 m.)  
**Cockpit Depth** 36" (.91 m.)  
**Approx. Wt.** 3330 lbs. (1510 kg.)  
 w/5.0 GL Volvo Penta  
**Transom Deadrise** 21°  
**Transom Width** 97" (2.46 m.)  
**LOA on Trailer** 24' 9" (7.54 m.)  
**Fuel Capacity** 34 gal. (129 L.)  
**Maximum Load** 1475 lbs. (669 kg.)  
**Max. Persons** 10 or 1475 lbs. (669 kg.)  
 NIMMA Certified  
**Draft: A. Drive Unit Up** 16 1/2" (42 m.)  
**B. Drive Unit Down** 31 1/2" (80 m.)

## Standard Features

AM/FM Sirius satellite-ready stereo w/4 stainless steel speaker covers, MP3 adaptor  
 Automatic bilge pump  
 Custom non-directional wood grain steering wheel  
 Deck reinforcement for Xtreme tower (dealer installed)  
 Electric horn  
 Flip-up bow filler w/filler pad  
 Full fiberglass floor w/built-in footrests & drains  
 Glove box w/stainless steel hinge & latch  
 Hinged ski locker lid w/latch  
 Merc/Volvo prop  
 Molded extended swim platform  
 Ski locker mat  
 Ski tow ring  
 SL Seating: Suspension Aire adjustable bucket seats w/flip-up bolsters, aft bench seat/sunlounge & stbd. walk-thru  
 Snap-in carpet  
 Stainless steel bow & stern eyes  
 Stainless steel control plate  
 Stainless steel courtesy lights  
 Stainless steel drink holders  
 Stainless steel passenger grab handles  
 Stainless steel pull-up cleats  
 Stainless steel rubrail insert  
 Stainless steel stern rails  
 Telescopic 3-step boarding ladder  
 Tilt steering wheel  
 Walk-thru full glass windshield w/full side wings

## Optional Features

Cockpit table w/stern base  
 Color-coordinated Bimini Canvas Package: bow cover, side curtains, walk-thru curtain, stern curtain & clear connector  
 Color-coordinated Bimini top & boot  
 Color-coordinated Bimini top for wakeboard tower  
 Color-coordinated bow cover  
 Color-coordinated cockpit cover  
 Convertible aft facing sunlounge seating  
 L-shaped cockpit w/swivel seat/foot rest  
 Mooring cover  
 Premium Sound System: upgraded radio, 2 transom speakers, w/radio remotes, amplifier, subwoofer, speaker switch  
 Stainless Steel Package: stainless steel stern logo plate/bow plate & exhaust decals  
 Upgrade Package: docking lights, tilt/trim switch, hour meter, stainless steel transom shower  
 Xtreme wakeboard tower & rack  
 (All canvas choices except mooring cover are color-coordinated fabric)

## Color Choices

White w/Electric Yellow Gelcoat & Silver/Chrome Graphics  
 White w/Jet Black Gelcoat & Silver/Chrome Graphics  
 White w/Royal Blue Gelcoat & Silver/Chrome Graphics  
 White w/Laser Red Gelcoat & Silver/Chrome Graphics

## Engine Choices

5.0L MPI MerCruiser (260 hp)  
 5.0L MPI EC MerCruiser (260 hp)  
 350 Magnum MPI Alpha MerCruiser (300 hp)  
 350 Mag MPI EC Alpha MerCruiser (300 hp)  
 5.0 GXi Volvo Penta (270 hp)  
 5.0 GXiC Volvo Penta (270 hp)  
 5.7 Gi Volvo Penta (300 hp)  
 5.7 GIC Volvo Penta (300 hp)

## Performance

Engine: 5.0L MPI MerCruiser, Prop: 19 pitch

rpm	mph	gph	range*
2000	9	4.3	65
3000	27	7.1	114
4000	36	14.0	79
WOT	50-53	17.8	84

Time to plane: 2.6 seconds

Acceleration 0-20 MPH: 3.9 seconds

Engine: 5.0 GXi Volvo Penta, Prop: 19 pitch

rpm	mph	gph	range*
2000	10	4.1	73
3000	27	7.1	117
4000	39	14.0	86
5000	50	19.3	79
WOT	50-52	22.3	70

Time to plane: 3.0 seconds

Acceleration 0-20 MPH: 4.9 seconds

\* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

# GLS 235 BOWRIDER

## Specifications

**Length** 23' 9" (7.24 m.)  
**Beam** 102" (2.59 m.)  
**Depth** 57" (1.45 m.)  
**Maximum Depth** 70" (1.78 m.)  
**Cockpit Depth** 36" (.91 m.)  
**Approx. Wt.** 4080 lbs. (1851 kg.)  
 w/5.7 GXi Volvo Penta  
**Transom Deadrise** 21°  
**Transom Width** 97" (2.46 m.)  
**LOA on Trailer** 25' 10" (7.87 m.)  
**Fuel Capacity** 56 gal. (212 L.)  
**Maximum Load** 1650 lbs. (748 kg.)  
**Max. Persons** 12 or 1650 lbs. (748 kg.)  
**MMMA Certified**  
**Drive Unit Up** 17 1/2" (.44 m.)  
**Drive Unit Down** 33" (.84 m.)

## Standard Features

AM/FM Sirius satellite-ready stereo w/4 stainless steel speaker covers, MP3 adaptor  
 Automatic bilge pump  
 Custom non-directional wood grain steering wheel  
 Deck reinforcement for Xtreme tower (dealer installed)  
 Flip-up bow filler w/filler pad  
 Flush-mounted ski tow ring  
 Full fiberglass floor w/built-in footrest & drains  
 Glove box w/stainless steel hinge & latch  
 Hinged ski locker lid w/latch  
 Instrument panel includes: 5" speedometer, 5" multi-function tachometer/fuel/trim gauge, 2" oil pressure/2" voltmeter/2" engine temperature gauges; plus switches for bilge pump, blower, navigation/anchor lights, courtesy lights, horn, depth sounder, stereo remote in dash, 12 volt outlet  
 Molded extended swim platform  
 Navigational lighting  
 Ski locker mat  
 Ski tow ring  
 Snap-in carpet  
 Stainless steel bow & stern eyes  
 Stainless steel control plate  
 Stainless steel courtesy lights  
 Stainless steel drink holders  
 Stainless steel pull-up cleats  
 Stainless steel rubrail insert  
 Stainless steel stern rails  
 Stainless steel telescopic 3-step boarding ladders (fore & aft)  
 Suspension/Aire adjustable bucket seats w/ flip-up bolsters; U-shaped cockpit seating w/swivel seat/foot rest, sunlounge w/flip-up rumble seat, starboard storage compartments & stbd. walk-thru  
 Tilt steering wheel

## Optional Features

Cockpit table w/bow & stern bases  
 Color-coordinated Bimini Canvas Package  
 Color-coordinated Bimini top & boot  
 Color-coordinated Bimini top for wakeboard tower  
 Color-coordinated bow cover  
 Color-coordinated cockpit cover  
 Premium Sound System: upgraded radio, 2 transom speakers, 2 radio remotes, amplifier, subwoofer, speaker switch  
 (All canvas choices are color-coordinated fabric)  
 Stainless Steel Package: stainless steel stern logo plate/bow plate/exhaust decals  
 Upgrade Package: docking lights, tilt/trim switch, hour meter, stainless steel transom shower  
 Xtreme wakeboard tower & rack

## Color Choices

White w/Electric Yellow Gelcoat & Silver/Chrome Graphics  
 White w/Jet Black Gelcoat & Silver/Chrome Graphics  
 White w/Royal Blue Gelcoat & Silver/Chrome Graphics  
 White w/Laser Red Gelcoat & Silver/Chrome Graphics

## Engine Choices

5.0L MPI MerCruiser (260 hp)  
 5.0L MPI EC MerCruiser (260 hp)  
 350 Mag MPI Bravo I MerCruiser (300 hp)  
 350 Mag MPI EC Bravo I MerCruiser (300 hp)  
 350 Mag MPI Bravo III MerCruiser (300 hp)  
 350 Mag MPI EC Bravo III MerCruiser (300 hp)  
 5.0 GXi Volvo Penta (270 hp)  
 5.0 GXC Volvo Penta (270 hp)  
 5.7 Gi Volvo Penta (300 hp)  
 5.7 Gi DP Volvo Penta (300 hp)  
 5.7 GIC Volvo Penta (300 hp)  
 5.7 GIC DP Volvo Penta (300 hp)

## Performance

Engine: 5.0 GXi Volvo Penta, Props: F4

rpm	mph	gph	range*
2000	11	4.3	131
3000	26	7.1	183
4000	37	12.6	148
5000	47	21.2	112
WOT	46-48	21.7	111

Time to plane: 3.3 seconds  
 Acceleration 0-20 MPH: 4.6 seconds

Engine: 5.7 Gi DP Volvo Penta, Props: F5

rpm	mph	gph	range*
2000	11	4.4	126
3000	27	7.6	182
4000	39	13.2	149
5000	49	20.7	118
WOT	50-52	23.8	109

Time to plane: 2.6 seconds  
 Acceleration 0-20 MPH: 3.3 seconds

Engine: 350 Magnum MPI Bravo III MerCruiser, Props: 24 pitch

rpm	mph	gph	range*
2000	10	4.6	111.8
3000	26	7.5	174.0
4000	38	12.8	148.4
5000	48	21.0	115.4
WOT	50-52	23.2	111.2

Time to plane: N/A  
 Acceleration 0-20 MPH: 5.5 seconds

\* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

## Specifications

**Length** 25' 4" (7.72 m.)  
**Beam** 102" (2.59 m.)  
**Depth** 59 1/2" (1.51 m.)  
**Maximum Depth** 72 1/2" (1.84 m.)  
**Cockpit Depth** 36" (91 m.)  
**Approx. Wt.** 4600 lbs. (2087 kg.)  
 w/5.7L Alpha MerCruiser  
**Draft:** **A. Drive Unit Up** 18 1/2" (.47 m.)  
**B. Drive Unit Down** 34" (.86 m.)  
**Transom Deadrise** 21°  
**Transom Width** 97" (2.46 m.)  
**LOA on Trailer** 26' 5" (8.05 m.)  
**Fuel Capacity** 56 gal. (212 L.)  
**Maximum Load** 2000 lbs. (907 kg.)  
**Max. Persons** 12 or 1800 lbs. (816 kg.)  
**NMMA Certified**

## Standard Features

AM/FM Sirius satellite-ready stereo w/4 stainless steel speaker covers, MP3 adaptor  
 Automatic bilge pump  
 Bow seats w/molded side storage & seat latch  
 Built-in cockpit storage, port & starboard  
 Custom non-directional wood grain steering wheel  
 Electric horn  
 Enclosed head w/porta-pottie, vanity, sink, faucet, storage, stainless steel port window  
 Flip-up bow filler w/filler pad  
 Full fiberglass floor w/built-in footrest & drains  
 Glove box w/stainless steel hinge & latch  
 Hinged ski locker lid w/latch  
 Instrument panel includes: 5 speedometer, 5 multi-function tachometer/2 fuel/trim gauge, 2 oil pressure/2 voltmeter/2 engine temperature gauges; plus switches for bilge pump, blower, navigation/anchor lights, courtesy lights, horn, depth sounder, stereo remote in dash, 12 volt outlet  
 Merc/Volvo prop  
 Molded extended swim platform  
 Navigational lighting  
 Retro walk-thru full glass windshield  
 Ski locker mat  
 Ski tow ring  
 Snap-in carpet  
 Stainless steel bow & stern eyes  
 Stainless steel cockpit & bow oval grab handles  
 Stainless steel control plate  
 Stainless steel courtesy lights  
 Stainless steel drink holders  
 Stainless steel hinged & latched boarding ladder lids  
 Stainless steel plated intake/exhaust vents  
 Stainless steel pull-up cleats  
 Stainless steel rubrail insert  
 Stainless steel stern rails  
 Stainless steel telescopic 3-step boarding ladders (bow & stern)  
 Suspension Aire adjustable bucket seats w/flip-up bolsters; U-shaped cockpit seating w/filler cushions; sunlounge w/flip-up rumble seat & starboard walk-thru  
 Tilt steering wheel

## Optional Features

Captain's Call electric exhaust (8.2 MPI EC MerCruiser & 8.1 Volvo Penta only)  
 Cockpit table w/bow & stern bases  
 Color-coordinated Bimini Canvas Package: bow cover, side curtains, walk-thru curtain, stern curtain & cleat connector  
 Color-coordinated Bimini top & boot  
 Color-coordinated bow cover  
 Color-coordinated cockpit cover  
 Premium Sound System: stern speakers (2), stainless steel cover w/switch, amplifier, subwoofer, upgraded stereo, stereo remote (bow & stern), speaker switch  
 Stainless Steel Package: stainless steel stern logo plate/bow plate/exhaust decals  
 Upgrade Package: docking lights, tilt/trim switch, hour meter, stainless steel transom shower  
 Xtreme wakeboard tower & rack

## Color Choices

White w/Electric Yellow Gelcoat & Silver/Chrome Graphics  
 White w/Let Black Gelcoat & Silver/Chrome Graphics  
 White w/Royal Blue Gelcoat & Silver/Chrome Graphics  
 White w/Laser Red Gelcoat & Silver/Chrome Graphics

52

## Engine Choices

350 Magnum MPI Bravo I MerCruiser (300 hp)  
 350 Magnum MPI EC Bravo I MerCruiser (300 hp)  
 350 Magnum MPI Bravo III MerCruiser (300 hp)  
 350 Magnum MPI EC Bravo III MerCruiser (300 hp)  
 8.2 MPI EC Bravo III MerCruiser (380 hp)  
 5.7 Gi Volvo Penta (300 hp)  
 5.7 GIC Volvo Penta (300 hp)  
 5.7 Gi DP Volvo Penta (300 hp)  
 5.7 GIC DP Volvo Penta (300 hp)  
 8.1 Gi DP Volvo Penta (375 hp)  
 8.1 GIC DP Volvo Penta (400 hp)

## Performance

Engine: 5.7 Gi DP Volvo Penta, Props: F4

rpm	mph	gph	range*
2000	10	4.1	125
3000	25	7.4	168
4000	36	14.7	122
WOT	46-48	24.0	100

Time to plane: 4.2 seconds

Acceleration 0-20 MPH: 6.1 seconds

Engine: 8.2 MPI Bravo III MerCruiser, Prop: 19 pitch

rpm	mph	gph	range*
2000	10	5.8	88
3000	30	10.3	149
4000	42	18.7	114
WOT	54	31.1	88

Time to plane: N/A

Acceleration 0-20 MPH: 6.8 seconds

\* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

## Specifications

**Length** 20' 1" (6.12 m.)  
**Beam** 102" (2.59 m.)  
**Depth** 50 1/2" (1.28 m.)  
**Maximum Depth** 59" (1.50 m.)  
**Cockpit Depth** 35" (.89 m.)  
**Approx. Wt.** 2900 lbs. (1315 kg.)  
 w/4.3L MerCruiser  
**Draft:** **A. Drive Unit Up** 13" (.33 m.)  
**B. Drive Unit Down** 28" (.71 m.)

**Transom Deadrise** 17°  
**Transom Width** 94" (2.39 m.)  
**LOA on Trailer** 23' 5" (7.14 m.)  
**Fuel Capacity** 50 gal. (189 L.)  
**Maximum Load** 1400 lbs. (635 kg.)  
**Max. Persons** 10 or 1400 lbs. (635 kg.)  
**NMMA Certified**

## Standard Features

Aerated livewell  
 AM/FM/CD/Sirius satellite stereo  
 w/2 stainless steel speaker covers,  
 MP3 adaptor  
 Automatic bilge pump  
 Carry-on cooler  
 Color-coordinated Bimini top & boot  
 Custom non-directional wood grain  
 steering wheel  
 Depth sounder  
 Fishing rod holders  
 Hinged ski locker lid w/latch  
 Hour meter  
 Integrated fore & aft swim/fishing platforms  
 Removable padded sunlounge  
 Ski tow ring  
 Skid-resistant fiberglass floor  
 Smoked windscreen  
 Snap-in carpet  
 Stainless steel boarding ladder  
 Stainless steel bow & stern eyes  
 Stainless steel courtesy lights  
 Stainless steel drink holders  
 Stainless steel grab handles  
 Stainless steel rubrail insert  
 Stowaway fishing seat  
 Suspension/Aire wraparound bucket helm  
 seat w/flip-up bolster  
 Tilt steering wheel  
 Transom & dockside boarding  
 Trolling motor plug  
 Walk-thru transom w/gate  
 Wraparound bow seating w/storage

## Optional Features

Bow table w/floor mount  
 Color-coordinated cockpit cover  
 Extended swim platform  
 Fishing package: aerator pump, rod holder,  
 fishing seat, 12V receptacle  
 Forward fishing seat & pedestal  
 (All canvas choices are color-coordinated fabric)

## Color Choices

White w/Electric Yellow Gelcoat & Silver/Chrome Graphics  
 White w/et Black Gelcoat & Silver/Chrome Graphics  
 White w/Royal Blue Gelcoat & Silver/Chrome Graphics  
 White w/Laser Red Gelcoat & Silver/Chrome Graphics

## Engine Choices

4.3L MerCruiser (190 hp)  
 4.3L MPI MerCruiser (220 hp)  
 4.3L MPI EC MerCruiser (220 hp)  
 5.0L MPI MerCruiser (260 hp)  
 5.0L MPI EC MerCruiser (260 hp)  
 4.3 GL Volvo Penta (190 hp)  
 4.3 GXi Volvo Penta (225 hp)  
 5.0 GXi Volvo Penta (270 hp)  
 5.0 GXiC Volvo Penta (270 hp)

## Performance

**Engine: 4.3 GXi Volvo Penta, Prop: 21 pitch**

rpm	mph	gph	range*
2500	21	4.8	197
3500	35	8.2	192
4500	41	14.8	125
WOT	51-53	—	—

Time to plane: N/A\*\*

Acceleration 0-20 MPH: N/A\*\*

**Engine: 5.0 GXi Volvo Penta, Prop: 21 pitch**

rpm	mph	gph	range*
2000	12	4.1	85
3000	31	7.1	142
4000	45	8.8	143
WOT	54-56	—	—

Time to plane: 2.7 seconds

Acceleration 0-20 MPH: 4.5 seconds

\* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

\*\* Not available.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

## Specifications

**Length** 20' 11" (6.38 m.)  
**Beam** 102" (2.59 m.)  
**Depth** 57 1/2" (1.46 m.)  
**Maximum Depth** N/A  
**Cockpit Depth** 28 1/2" (.72 m.)  
**Approx. Wt.** 3600 lbs. (1633 kg.)  
 w/5.0L MPI MerCruiser  
**Transom Deadrise** 16°  
**Transom Width** 96" (2.44 m.)  
**LOA on Trailer** 23' 9" (7.24 m.)  
**Fuel Capacity** 56 gal. (212 L.)  
**Maximum Load** 1900 lbs. (862 kg.)  
**Max. Persons** 13 or 1800 lbs. (816 kg.)  
**NMMA Certified**  
**Draft: A. Drive Unit Up** 14" (.36 m.)  
**B. Drive Unit Down** 30" (.76 m.)

## Standard Features

AM/FM Sirius satellite-ready stereo w/4 stainless steel speaker covers, MP3 adaptor	Integrated fore & aft swim platforms w/ concealed boarding ladders
Automatic bilge pump	Merc/Volvo prop
Bow anchor locker	Navigational lighting
Bow storage compartments	Padded sunlounge
Color-coordinated Bimini top & boot	Ski tow ring
Compass	Smoked windscreen
Custom non-directional wood grain steering wheel	Stainless steel bow & stern eyes
Electric horn	Stainless steel courtesy lights
Enclosed head	Stainless steel drink holders
Entertainment console w/sink, electric water pump (12.5 gal) & carry-on cooler	Stainless steel grab handles
Fiberglass floor w/drain	Stainless steel rubrail insert
Flip-up bucket seat	Stainless steel speaker grills
Hinged ski locker lid w/latch	Suspension Aire adjustable bucket seats w/ flip-up bolster
Hour meter & depth sounder	Tilt steering wheel
	Transom & dockside boarding
	Wraparound bow seats

## Optional Features

Bow filler cushions	Fishing Package: livewell with switch at dash,
Color-coordinated cockpit cover	2 bow fishing seats & bow trolling
Docking lights	motor plug
Extended swim platform	Porta-pottie
	Table w/floor mounts, fore & aft

(All canvas choices are color-coordinated fabric)

## Color Choices

White w/Electric Yellow Gelcoat & Silver/Chrome Graphics  
 White w/Jet Black Gelcoat & Silver/Chrome Graphics  
 White w/Royal Blue Gelcoat & Silver/Chrome Graphics  
 White w/Laser Red Gelcoat & Silver/Chrome Graphics

## Engine Choices

4.3L MPI MerCruiser (220 hp)	4.3 GXi Volvo Penta (225 hp) Included
4.3L MPI EC MerCruiser (220 hp)	5.0 GXi Volvo Penta (270 hp) Included
5.0L MPI MerCruiser (260 hp)	5.0 GXiC Volvo Penta (270 hp)
5.0L MPI EC MerCruiser (260 hp)	5.7 Gi Volvo Penta (300 hp)
350 Mag MPI Alpha MerCruiser (300 hp)	5.7 GIC Volvo Penta (300 hp)
350 Mag MPI EC Alpha MerCruiser (300 hp)	

## Performance

Engine: 5.0 GXi Volvo Penta, Prop: 21 pitch

rpm	mph	gph	range*
2000	9	4.2	108
3000	28	7.4	191
4000	40	12.5	161
WOT	49-51	—	—

Time to plane: 3.0 seconds

Acceleration 0-20 MPH: 5.4 seconds

Engine: 5.0L MPI MerCruiser, Prop: 19 pitch

rpm	mph	gph	range*
2000	9	3.8	119
3000	27	7.0	194
4000	39	11.4	172
WOT	47-49	—	—

Time to plane: 4.3 seconds

Acceleration 0-20 MPH: N/A\*\*

\* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

\*\* Not available.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

## Specifications

<b>Length</b> 20' 11" (6.38 m.)	<b>Transom Deadrise</b> 16°
<b>Beam</b> 102" (2.59 m.)	<b>Transom Width</b> 98" (2.49 m.)
<b>Depth</b> 57 1/2" (1.46 m.)	<b>LOA on Trailer</b> 23' 9" (7.24 m.)
<b>Maximum Depth</b> 66 1/2" (1.69 m.)	<b>Fuel Capacity</b> 56 gal. (212 L.)
<b>Cockpit Depth</b> 28 1/2" (.72 m.)	<b>Maximum Load</b> 1800 lbs. (816 kg.)
<b>Approx. Wt.</b> 3930 lbs. (1783 kg.)	<b>Max. Persons</b> 10 or 1600 lbs. (726 kg.)
w/5.0 GXi Volvo Penta	<b>NMMA Certified</b>
<b>Draft:</b>	<b>A. Drive Unit Up</b> 14" (.36 m.)
	<b>B. Drive Unit Down</b> 30" (.76 m.)

## Standard Features

AM/FM Sirius satellite stereo w/4 stainless steel speaker covers, MP3 adaptor	Merc/Volvo Prop
Anchor locker	Navigational lighting
Automatic bilge pump	Padded sunlounge
Bow filler cushion	Removable cooler
Cleats	Ski tow ring
Color-coordinated Bimini top & boot	Snap-in carpet
Custom non-directional wood grain steering wheel	Stainless steel bow & stern eyes
Dockside boarding gate	Stainless steel courtesy lights
Electric horn	Stainless steel drink holders
Enclosed head w/vanity & mirror	Stainless steel grab handles
Fiberglass floor w/drains	Stainless steel rubrail insert
Fore & aft swim platforms w/concealed ladders	Suspension Aire adjustable bucket seats w/ flip-up bolster
Glove box w/hinge & latch	Tilt steering wheel
Hinged ski locker lid w/latch	Transom & dockside boarding
Instrument panel includes: speedometer, tachometer & fuel gauges; plus switches for bilge pump, navigation/ anchor lights, horn & accessories	Walk-thru curved windshield
	Walk-thru transom
	Wrap around bow seats with storage

## Optional Features

Bow table	Docking lights
Color-coordinated bow cover	Extended swim platform
Color-coordinated Canvas Package for Bimini top: side curtains, aft curtain & clear connector	Porta-pottie
Color-coordinated cockpit cover	Premium Sound System: upgraded radio, 2 radio remotes, amplifier, subwoofer
	Pull-up cleats

*All canvas choices are color-coordinated fabric)*

## Color Choices

- White w/Electric Yellow Gelcoat & Silver/Chrome Graphics
- White w/Jet Black Gelcoat & Silver/Chrome Graphics
- White w/Royal Blue Gelcoat & Silver/Chrome Graphics
- White w/Laser Red Gelcoat & Silver/Chrome Graphics

## Engine Choices

5.0L MPI MerCruiser (260 hp)	5.0 GXi Volvo Penta (270 hp)
5.0L MPI EC MerCruiser (260 hp)	5.0 GXiC Volvo Penta (270 hp)
350 Magnum MPI Alpha MerCruiser (300 hp)	5.7 Gi Volvo Penta (300 hp)
350 Magnum MPI EC Alpha MerCruiser (300 hp)	5.7 GIC Volvo Penta (300 hp)

## Performance

**Engine: 5.0 GXi Volvo Penta, Prop: 19 pitch**

rpm	mph	gph	range*
2000	9	4.0	113
3000	26	7.2	182
4000	39	12.3	160
WOT	49-51	—	—

Time to plane: 3.6 seconds  
Acceleration 0-20 MPH: N/A\*\*

**Engine: 5.7 Gi Volvo Penta, Prop: 17 pitch**

rpm	mph	gph	range*
2000	9	4.7	97
3000	28	8.2	172
4000	40	13.5	149
WOT	47-49	—	—

Time to plane: 3.1 seconds  
Acceleration 0-20 MPH: 4.3 seconds

- \* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.
- \*\* Not available.

*Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet.*

*Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.*

## Specifications

<b>Length</b> 24' 4" (7.42 m.)	<b>Transom Deadrise</b> 15°
<b>Beam</b> 102" (2.59 m.)	<b>Transom Width</b> 94" (2.39 m.)
<b>Depth</b> 60" (1.52 m.)	<b>LOA on Trailer</b> 26' 6" (8.08 m.)
<b>Maximum Depth</b> 69" (1.75 m.)	<b>Fuel Capacity</b> 73 gal. (276 L.)
<b>Cockpit Depth</b> 31" (.79 m.)	<b>Maximum Load</b> 1950 lbs. (885 kg.)
<b>Approx. Wt.</b> 4000 lbs. (1814 kg.)	<b>Max. Persons</b> 13 or 1950 lbs. (885 kg.)
w/5.7 Gi Volvo Penta	<b>NMMA Certified</b>
<b>Draft:</b>	<b>A. Drive Unit Up</b> 18" (.46 m.)
	<b>B. Drive Unit Down</b> 32" (.81 m.)

## Standard Features

AM/FM Sirius satellite stereo w/4 stainless steel speaker covers, MP3 adaptor	Self-draining ski locker w/mat
Anchor locker	Ski tow ring
Automatic bilge pump	Snap-in carpet
Bow swim platform w/concealed telescopic ladder	Stainless steel bow & stern eyes
Cleats	Stainless steel courtesy lights
Color-coordinated Bimini top & boot	Stainless steel custom intake/exhaust vents
Compass	Stainless steel drink holders
Custom non-directional wood grain steering wheel	Stainless steel grab handles
Depth sounder & hour meter	Stainless steel rubrail insert
Electric Horn	Stern extended swim platform w/ladder
Enclosed head compartment & sink w/Alpha stone countertop & storage	Suspension Aire wraparound bucket seats w/flip-up bolster
Fiberglass floor w/drains	Table w/bow & aft floor mounts
Hinged ski locker lid w/latch	Tilt steering
Navigational lighting	Transom jump seat
Removable cooler	Walk-thru transom w/gate
	Wraparound bow seating w/storage

## Optional Features

Bow filler cushions	Porta-pottie
Compass	Premium Sound System: upgraded radio, 2 radio remotes (bow & stern), amplifier, subwoofer
Docking lights	Pull-up cleats
Freshwater transom shower	
High altitude propeller	
Portable head w/pump-out	

(All canvas choices are color-coordinated fabric)

## Color Choices

- White w/Electric Yellow Gelcoat & Silver/Chrome Graphics
- White w/Jet Black Gelcoat & Silver/Chrome Graphics
- White w/Royal Blue Gelcoat & Silver/Chrome Graphics
- White w/Laser Red Gelcoat & Silver/Chrome Graphics

## Engine Choices

5.0L MPI MerCruiser (260 hp)	5.0 GXi Volvo Penta (270 hp)
5.0L MPI EC MerCruiser (260 hp)	5.0 GXiC Volvo Penta (270 hp)
350 Mag MPI Alpha MerCruiser (300 hp)	5.7 Gi Volvo Penta (300 hp)
350 Mag MPI EC Alpha MerCruiser (300 hp)	5.7 Gi DP Volvo Penta (300 hp)
350 Magnum MPI Bravo III MerCruiser (300 hp)	5.7 GC Volvo Penta (300 hp)
350 Mag MPI EC Bravo III MerCruiser (300 hp)	5.7 GC DP Volvo Penta (300 hp)

## Performance

Engine: 5.0 GXi Volvo Penta, Prop: 19 pitch

rpm	mph	gph	range*
2000	9	4.0	148
3000	26	7.5	228
4000	38	12.1	206
WOT	49-51	—	—

Time to plane: 4.0 seconds

Acceleration 0-20 MPH: N/A\*\*

Engine: 5.7 Gi Volvo Penta, Prop: 19 pitch

rpm	mph	gph	range*
2000	9	4.76	124
3000	28	8.5	215
4000	41	14.2	189
5000	49	19.2	169
WOT	50-52	20.2	166

Time to plane: 3.1 seconds

Acceleration 0-20 MPH: 5.7 seconds

Engine: 350 Magnum MPI Alpha MerCruiser, Prop: 17 pitch

rpm	mph	gph	range*
2000	9	4.5	131
3000	25	7.0	235
4000	37	12.1	201
WOT	48-50	—	—

Time to plane: 5.0 seconds

Acceleration 0-20 MPH: 7.5 seconds

\* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

\*\* Not available.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.



## GS 209 CUDDY CABIN

### Specifications

**Length** 20' 2" (6.15 m.)  
**Beam** 94 1/4" (2.39 m.)  
**Depth** 50" (1.27 m.)  
**Maximum Depth** 71" (1.80 m.)  
**Cockpit Depth** 35" (.89 m.)  
**Approx. Wt.** 2832 lbs. (1285 kg.)  
 w/5.0 GL Volvo Penta  
**Transom Deadrise** 21°  
**Transom Width** 90" (2.29 m.)  
**LOA on Trailer** 24' 8" (7.52 m.)  
**Fuel Capacity** 45 gal. (170 L.)  
**Maximum Load** 1450 lbs. (658 kg.)  
**Max. Persons** 8 or 1150 lbs. (522 kg.)  
**NIMMA Certified**  
**Draft:** A. Drive Unit Up 18 1/2" (.47 m.)  
 B. Drive Unit Down 33" (.84 m.)

### Standard Features

AM/FM Sirius satellite-ready stereo  
 w/2 speakers, MP3 adaptor  
 Automatic bilge pump  
 Blower  
 Bow access step  
 Bow anchor locker  
 Cleats  
 Color-coordinated soft top & boot  
 Convenience Package: hour meter & depth sounder  
 Cuddy cabin includes: upholstered V-berth, cabin courtesy light, deck hatch w/ screen & lockable door  
 Custom non-directional wood grain steering wheel  
 Electric horn  
 Flip-up bucket seat (1)  
 Floor storage area  
 Helm storage locker  
 Instrument panel includes: speedometer, tachometer & fuel gauges; plus switches for bilge pump, navigation/ anchor lights, horn & accessories  
 Molded swim platform  
 Navigational lighting  
 Padded sunlounge  
 Seating: 1 bucket non-flip seat & port lounge seat/aft jump seats/motor box  
 Ski tow ring  
 Stainless steel speaker covers  
 Stainless steel bow & stern eyes  
 Stainless steel bow rails  
 Stainless steel drink holders  
 Stainless steel passenger grab handles  
 Stainless steel rubrail insert  
 Teak-style flooring  
 Telescopic 3-step boarding ladder  
 Tilt steering wheel  
 Walk-thru curved full glass windshield

### Optional Features

Color-coordinated Camper Canvas Package: includes Canvas Package less stern curtain, plus aft camper top, aft camper side curtains & aft camper stern curtain  
 Color-coordinated Canvas Package: side curtains & stern curtain  
 Color-coordinated cockpit cover  
 Extended swim platform  
 Flip-up bucket seat (1)  
 Galley Package (w/std interior): alcohol stove, ice box, sink, water system, dual helm seat & aft jump seats  
 Mooring cover  
 Porta-pottie  
 SL Seating: 2 bucket seats, aft bench seat, sunlounge  
 (All canvas choices except mooring cover are color-coordinated fabric)

### Color Choices

White w/Jet Black Gelcoat  
 White w/Navy Blue Gelcoat  
 White w/Crimson Red Gelcoat  
 White w/Pewter Gelcoat

### Engine Choices

4.3L MerCruiser (190 hp) Included  
 4.3L MPI MerCruiser (220 hp)  
 4.3L MPI EC MerCruiser (220 hp)  
 5.0L MPI MerCruiser (260 hp)  
 5.0L MPI EC MerCruiser (260 hp)  
 4.3 GL Volvo Penta (190 hp)  
 4.3 GXI Volvo Penta (225 hp)  
 5.0 GXIC Volvo Penta (270 hp)

### Performance

Engine: 4.3 GXI Volvo Penta, Prop: 21 pitch

rpm	mph	gph	range*
2000	15	4.0	152
3000	25	5.3	191
4000	35	9.0	158
WOT	46-48	—	—

Time to plane: 3.6 seconds

Acceleration 0-20 MPH: N/A\*\*

Engine: 5.0L MerCruiser, Prop: 21 pitch

rpm	mph	gph	range*
2000	9	N/A**	N/A**
3000	30	N/A**	N/A**
4000	43	N/A**	N/A**
WOT	48-50	—	—

Time to plane: N/A\*\*

Acceleration 0-20 MPH: 6.3 seconds

\* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

\*\* Not available.

Performance data is measured with two passengers, 3/4 full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

## Specifications

**Length** 24' (7.31 m.)  
**Beam** 102" (2.59 m.)  
**Depth** 80 1/2" (2.04 m.)  
**Bridge Clearance** 80 1/2" (2.04 m.)  
**Maximum Depth** 91" (2.31 m.)  
**Cockpit Depth** 36" (.91 m.)  
**Approx. Wt.** 4437 lbs. (2013 kg.)  
 w/5.0 GL Volvo Penta  
**Transom Deadrise** 20°  
**Transom Width** 97" (2.46 m.)  
**LOA on Trailer** 26'10" (8.18 m.)  
**Fuel Capacity** 56 gal. (212 L.)  
**Maximum Load** 2000 lbs. (907 kg.)  
**Max. Persons** 10 or 1475 lbs. (669 kg.)  
**NMMA Certified**  
**Draft:** **A. Drive Unit Up** 17" (.43 m.)  
**B. Drive Unit Down** 35" (.89 m.)

## Standard Features

Aft cabin w/overhead reading light  
 AM/FM Sirius satellite-ready stereo  
 w/4 speakers, MP3 adaptor  
 Automatic bilge pump  
 Chrome thru-hull fittings  
 Chrome vents  
 Cockpit area includes: adjustable bucket  
 seat w/flip-up bolster, L-shaped  
 passenger seating w/double-wide  
 fold-out sunlounge, stern storage  
 compartment & walk-thru transom  
 gate  
 Color-coordinated Bimini top & boot  
 Convenience Package: hour meter &  
 depth sounder  
 Custom non-directional wood grain  
 steering wheel  
 Dinette w/V-berth  
 Dual battery switch  
 Fiberglass floor w/drains  
 Main cabin includes: enclosed head w/4  
 gallon porta-pottie, fiberglass shower  
 stall, hanging clothes locker, wood  
 cabin table, ice box, alcohol stove,  
 on-demand water faucet & ceiling lights  
 Molded swim platform w/stainless steel  
 telescopic 3-step boarding ladder  
 Stainless steel bow rail  
 Stainless steel cleats  
 Stainless steel drink holders  
 Stainless steel rubrail insert  
 Stainless steel speaker covers & stereo  
 remote for dash  
 Tilt steering wheel  
 Translucent deck hatch w/screen  
 Vented cabin windows (4)  
 Walkaround deck  
 Walk-thru curved full glass windshield  
 Water tank (18 gallons)

## Optional Features

Color-coordinated Camper Canvas  
 Package includes Canvas Package less  
 stern curtain, plus aft camper top, aft  
 camper side curtains & aft camper  
 stern curtain  
 Color-coordinated Canvas Package for  
 Bimini top: side curtains, aft curtain &  
 clear connector  
 Color-coordinated cockpit cover  
 Dockside air conditioner/reverse heat  
 Electric anchor windlass  
 (All canvas choices are color-coordinated fabric)  
 Electric china head  
 Galley Package: microwave, 12/110  
 refrigerator, elec. stove, water heater,  
 110V dockside power, battery charger  
 Hydraulic trim tabs  
 Manual china head w/pump out  
 Remote control spotlight/compass package  
 Starboard windshield wiper  
 Stereo remote for dash  
 Transom shower

## Color Choices

White w/Jet Black Gelcoat  
 White w/Navy Blue Gelcoat  
 White w/Crimson Red Gelcoat  
 White w/Pewter Gelcoat

## Engine Choices

5.0L MPI Bravo III MerCruiser (260 hp)  
 5.0L MPI EC Bravo III MerCruiser (260 hp)  
 350 Mag MPI Bravo III MerCruiser (300 hp)  
 350 Mag MPI EC Bravo III MerCruiser (300 hp)  
 5.0 GXi DP Volvo Penta (270 hp)  
 5.0 GXi DP Volvo Penta (270 hp)  
 5.7 Gi DP Volvo Penta (300 hp)  
 5.7 GIC DP Volvo Penta (300 hp)

## Performance

Engine: 5.0 GXi DP Volvo Penta, Props: F3

rpm	mph	gph	range*
2000	9	4.3	106
3000	22	7.4	150
4000	33	12.1	138
WOT	43-45	—	—

Time to plane: 5.3 seconds

Acceleration 0-20 MPH: 7.5 seconds

- \* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.  
 \*\* Not available.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

## Specifications

LOA 25' 10" (7.57 m.)  
 LOA on Trailer 25' 10" (7.57 m.)  
 Beam 10' 2" (2.59 m.)  
 Depth 36" (91 cm.)  
 Clearance 81 1/4" (2.06 m.)  
 Maximum Depth 91 1/4" (2.32 m.)  
 Draft: A. Drive Unit Up 22" (.56 m.)  
       B. Drive Unit Down 36" (.91 m.)  
 Wt. 5450 lbs. (2472 kg.)  
 7L Alpha MerCruiser

**Transom Deadrise** 20°  
**Transom Width** 98" (2.49 m.)  
**LOA on Trailer** N/A  
**Fuel Capacity** 56 gal. (212 L.)  
**Maximum Load** 2240 lbs. (1016 kg.)  
**Max. Persons** 10 or 2240 lbs. (1016 kg.)  
**NMMA** Certified

## Standard Features

Overhead reading light  
 Sirius satellite stereo w/2 stainless speaker cover, MP3 adaptor  
 bilge pump  
 manual pump-out  
 area includes: wet bar w/sink  
 cushioned seat  
 coordinated Bimini top & boot  
 & remote control spotlight  
 non-directional wood grain  
 steering wheel  
 & hour meter  
 battery switch  
 floor w/drains & built-in footrest  
 package: microwave oven, coffee  
 12/110 refrigerator, elec.  
 water heater, 110V dockside  
 battery charger  
 compartment w/fiberglass shower,  
 manual china head w/pump out  
 lower/compass  
 trim tabs

Main cabin includes: plush two-toned upholstery w/wood accents, enclosed head compartment w/fiberglass shower stall, wood cabin table, hanging clothes locker, cabin courtesy lights, on-demand water, cabin mirror w/reading lights & 3 vented cabin windows  
 Molded swim platform w/stainless steel telescopic 3-step boarding ladder  
 Ski tow ring  
 Stainless steel bow & stern eyes  
 Stainless steel bow rail  
 Stainless steel control plate  
 Stainless steel courtesy lights  
 Stainless steel drink holders  
 Stainless steel rubrail insert  
 Stereo remote at helm  
 Teak-style snap-in carpet  
 Telescopic 3-step boarding ladder  
 Translucent deck hatch w/screen  
 Transom shower  
 Water tank (18 gallons)

## Optional Features

coordinated Camper Canvas package includes: Canvas Package less stern curtain, plus aft camper top, aft camper side curtains & aft camper stern curtain  
 coordinated Canvas Package for Bimini top: side curtains, aft curtain & clear connector  
 coordinated cockpit cover  
 choices are color-coordinated fabric)

Decor Package: pillows and towels  
 Dockside air conditioner/reverse heat  
 Electric anchor windlass  
 Electric china head  
 Flat screen TV w/DVD player  
 Greywater system  
 Radar arch  
 Starboard windshield wiper  
 Stern filter cushion & table

## Color Choices

White w/Jet Black Gelcoat  
 White w/Navy Blue Gelcoat

White w/Crimson Red Gelcoat  
 White w/Fewter Gelcoat

## Engine Choices

5.0L MPI EC Bravo III MerCruiser (260 hp)    5.0 GXi DP Volvo Penta (270 hp)  
 5.0L MPI EC Bravo III MerCruiser (260 hp)    5.0 GXiC DP Volvo Penta (270 hp)  
 350 Mag MPI Bravo III MerCruiser (300 hp)    5.7 Gi DP Volvo Penta (300 hp)  
 350 Mag MPI EC Bravo III MerCruiser (300 hp)    5.7 GIC DP Volvo Penta (300 hp)

## Performance

**Engine: 5.0 GXi DP Volvo Penta, Prop: 17 pitch**

rpm	mph	gph	range*
2000	8	3.7	109
3000	20	7.4	136
4000	35	13.0	135
WOT	43-45	—	—

Time to plane: 5.2 seconds  
 Acceleration 0-20 MPH: 8.6 seconds

**Engine: 5.7 Gi DP Volvo Penta, Props: F4**

rpm	mph	gph	range*
2000	9	4.4	101
3000	22	9.0	123
4000	34	12.3	137
5000	43	20.7	105
WOT	44	22.3	101

Time to plane: 6.0 seconds  
 Acceleration 0-20 MPH: 8.3 seconds

**Engine: 350 Magnum MPI Bravo III MerCruiser, Props: 22 1/2 pitch**

rpm	mph	gph	range*
2000	8	4.7	92
3000	23	8.6	133
4000	35	12.7	138
5000	45	21.4	106
WOT	46-48	23.3	101

Time to plane: 5.8 seconds  
 Acceleration 0-20 MPH: 8.0 seconds

\* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet.  
 Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

## Specifications

Length 28' 10" (8.79 m.)  
 Beam 109" (2.77 m.)  
 Depth 101" (2.57 m.)  
 Maximum Depth 109" (2.77 m.)  
 Cockpit Depth 30" (76 m.)  
 Approx. Wt. 6500 lbs. (2948 kg.)  
 w/5.7 Gi DP Volvo Penta

Transom Width 100" (2.54 m.)  
 Transom Deadrise 20°  
 Fuel Capacity 84 gal. (318 L.)  
 Bridge Clearance 83" (2.11 m.)  
 Bridge Clearance w/Arch 98" (2.49 m.)  
 NMMA Certified

Draft: A. Drive Unit Up 28" (.71 m.)  
 B. Drive Unit Down 41" (1.04 m.)

## Standard Features

AM/FM Sirius satellite stereo w/4 stainless steel speaker covers & MP3 remote jack at dash  
 Automatic bilge pump  
 Bow roller & bow rope locker  
 Cockpit area includes: wet bar w/sink, refrigerator, water system, removable stern seat, portside lounge seat & high/low dual helm seat  
 Color-coordinated Bimini top & boot  
 Compass & remote control spotlight  
 Custom non-directional wood grain steering wheel  
 Deck hatch w/screen  
 Dual battery switch  
 Galley Package: microwave oven, 12/110 refrigerator, coffee maker, elec. stove, water heater, 110V dockside power, sink and water system  
 Head compartment w/fiberglass shower, sink, elec. china head w/pump-out

Hydraulic trim tabs & switch at helm  
 Manual bilge mid/forward  
 Molded swim platform w/stainless steel telescopic 3-step boarding ladder  
 Ski tow ring  
 Stainless steel bow & stern rails  
 Stainless steel courtesy lights  
 Stainless steel grab handles  
 Stainless steel pull-up cleats  
 Stainless steel rubrail insert  
 Stainless steel starboard windshield wiper  
 Stainless steel starboard windshield wiper  
 Stainless steel transom shower  
 Stainless steel vented cabin windows (4)  
 Stereo remote for dash  
 Teak-style snap-in carpet  
 Tilt steering wheel  
 Walk-thru curved full glass windshield  
 Walk-thru transom gate  
 Water tank (18 gallons)

## Optional Features

Decor Package: pillows and towels  
 Dockside air conditioner/reverse heat  
 Electric anchor windlass  
 Electronics Package for Radar Arch: C70 display, DSM 30 depth finder, 2DW radar, GPS  
 Extended swim platform  
 Flat screen TV w/DVD player  
 Foredeck sun pad  
 Forward facing radar arch  
 Generator  
 Grey water system  
 Stern filler cushion & table  
 VHF ship-to-shore radio w/antenna

## Optional Canvas

Color-coordinated Camper Canvas Package: Canvas Package less stern curtain, plus aft camper top, aft camper side curtains & aft camper stern curtain  
 (All canvas choices are color-coordinated fabric)  
 Color-coordinated Canvas Package for Bimini top includes: side curtains, aft curtain & clear connector  
 Color-coordinated cockpit cover

## Color Choices

White w/Crimson Red Gelcoat  
 White w/Jet Black Gelcoat  
 White w/Navy Blue Gelcoat  
 White w/Pewter Gelcoat

## Engine Choices

350 Mag MPI Bravo III MerCruiser (300 hp)  
 350 Mag MPI EC Bravo III MerCruiser (300 hp)  
 8.2 MPI EC Bravo III MerCruiser (380 hp)  
 5.7 Gi DP Volvo Penta (300 hp)  
 5.7 G/C DP Volvo Penta (300 hp)  
 8.1 Gi DP Volvo Penta (375 hp)  
 8.1 G/C DP Volvo Penta (400 hp)

## Performance

### Engine: 5.7 Gi DP Volvo Penta, Props: F4

rpm	mph	gph	range*
2000	9	3.8	178
3000	16	8.9	141
4000	31	12.7	185
5000	41	21.4	144
WOT	40-42	23.1	136

Time to plane: 5.6 seconds  
 Acceleration 0-20 MPH: 6.6 seconds

### Engine: 8.1 Gi DP Volvo Penta, Props: F4

rpm	mph	gph	range*
2000	10	6.4	119
3000	26	11.7	147
4000	38	17.4	164
WOT	44-46	26.4	116

Time to plane: 5.3 seconds  
 Acceleration 0-20 MPH: 6.2 seconds

\* Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Performance data is measured with two passengers, 3/4 to full tank of fuel, at altitudes of 0 to 1200 feet.

Actual performance will be affected by higher altitude, load, weather/water conditions, and optional equipment, such as wakeboard tower, extended swim platform and generator.

## MerCruiser Sterndrive Engine Information

**MerCruiser Model:**  
Horsepower at Prop Shaft  
Cylinders  
Cubic Inches  
Compression Ratio  
Max. Recommended RPM  
Lower Unit Gear Ratio  
Tilt  
Trim  
Length  
Width  
Height  
Weight

**MerCruiser Model:**  
Horsepower at Prop Shaft  
Cylinders  
Cubic Inches  
Compression Ratio  
Max. Recommended RPM  
Lower Unit Gear Ratio  
Tilt  
Trim  
Length  
Width  
Height  
Weight

**MerCruiser Model:**  
Horsepower at Prop Shaft  
Cylinders  
Cubic Inches  
Compression Ratio  
Max. Recommended RPM  
Lower Unit Gear Ratio  
Tilt  
Trim  
Length  
Width  
Height  
Weight

**MerCruiser Model:**  
Horsepower at Prop Shaft  
Cylinders  
Cubic Inches  
Compression Ratio  
Max. Recommended RPM  
Lower Unit Gear Ratio  
Tilt  
Trim  
Length  
Width  
Height  
Weight

**3.0L Alpha I**  
135 hp/101 kw.  
4  
181  
9.3:1  
4400-4800  
2.0:1  
Power  
Power  
29"  
26"  
21" (above crankshaft at CL)  
635 lbs. (pkg. weight)

**4.3L Alpha I\***  
190 hp/142 kw.  
6  
262  
9.4:1  
4400-4800  
1.81:1  
Power  
Power  
28"  
30"  
21" (above crankshaft at CL)  
848 lbs. (pkg. weight)

**4.3L MPI Alpha I\***  
220 hp/164 kw.  
6  
262  
9.4:1  
4400-4800  
1.62:1  
Power  
Power  
28"  
30"  
22" (above crankshaft at CL)  
865 lbs. (pkg. weight)

**4.3L MPI Bravo III\***  
220 hp/164 kw.  
6  
262  
9.4:1  
4400-4800  
2.2:1  
Power  
Power  
28"  
30"  
22" (above crankshaft at CL)  
921 lbs. (pkg. weight)

**MerCruiser Model:**  
Horsepower at Prop Shaft  
Cylinders  
Cubic Inches  
Compression Ratio  
Max. Recommended RPM  
Lower Unit Gear Ratio  
Tilt  
Trim  
Length  
Width  
Height  
Weight

**5.0L MPI Alpha I**  
260 hp/194 kw.  
8  
305  
9.4:1  
4600-5000  
1.62:1  
Power  
Power  
32"  
30"  
22" (above crankshaft CL)  
952 lbs. (pkg. weight)

**MerCruiser Model:**  
Horsepower at Prop Shaft  
Cylinders  
Cubic Inches  
Compression Ratio  
Max. Recommended RPM  
Lower Unit Gear Ratio  
Tilt  
Trim  
Length  
Width  
Height  
Weight

**5.0L MPI Bravo III**  
260 hp/164 kw.  
8  
305  
9.4:1  
4600-5000  
2.20:1  
Power  
Power  
32"  
30"  
22" (above crankshaft at CL)  
1019 lbs. (pkg. weight)

**MerCruiser Model:**  
Horsepower at Prop Shaft  
Cylinders  
Cubic Inches  
Compression Ratio  
Max. Recommended RPM  
Lower Unit Gear Ratio  
Tilt  
Trim  
Length  
Width  
Height  
Weight

**350 Magnum MPI Alpha I**  
300 hp/224 kw.  
8  
350  
9.4:1  
4800-5200  
1.47:1  
Power  
Power  
32"  
30"  
22" (above crankshaft at CL)  
946 lbs. (pkg. weight)

**MerCruiser Model:**  
Horsepower at Prop Shaft  
Cylinders  
Cubic Inches  
Compression Ratio  
Max. Recommended RPM  
Lower Unit Gear Ratio  
Tilt  
Trim  
Length  
Width  
Height  
Weight

**350 Magnum MPI Bravo I**  
300 hp/224 kw.  
8  
350  
9.4:1  
4800-5200  
1.50 to 1.65:1  
Power  
Power  
32"  
30"  
22" (above crankshaft at CL)  
987 lbs. (pkg. weight)

\* CARB compliant. For Mercury engines with catalytic converters, see pages 73-74.

<b>MerCruiser Model:</b>	<b>350 Magnum MPI Bravo III</b>
Horsepower at Prop Shaft	300 hp/224 kw.
Cylinders	8
Cubic Inches	350
Compression Ratio	9.4:1
Max. Recommended RPM	4800-5200
Lower Unit Gear Ratio	2.00 to 2.20:1
Tilt	Power
Trim	Power
Length	32"
Width	30"
Height	22" (above crankshaft at CL)
Weight	1013 lbs. (pkg. weight)

## MerCruiser Sterndrive Engines with Catalytic Converter

<b>MerCruiser Model:</b>	<b>3.0L MPI EC*</b>
Horsepower at Prop Shaft	135 hp/101 kw.
Cylinders	4
Cubic Inches	181
Compression Ratio	9.3:1
Max. Recommended RPM	4400-4800
Lower Unit Gear Ratio	2.0:1
Tilt	Power
Trim	Power
Length	29"
Width	26"
Height	21" (above crankshaft at CL)
Weight	728 lbs. (pkg. weight)

<b>MerCruiser Model:</b>	<b>4.3L MPI EC*</b>
Horsepower at Prop Shaft	190 hp/142 kw.
Cylinders	6
Cubic Inches	262
Compression Ratio	9.4:1
Max. Recommended RPM	4400-4800
Lower Unit Gear Ratio	1.81:1
Tilt	Power
Trim	Power
Length	28"
Width	30"
Height	21" (above crankshaft at CL)
Weight	848 lbs. (pkg. weight)

<b>MerCruiser Model:</b>	<b>5.0L MPI EC*</b>
Horsepower at Prop Shaft	260 hp/194 kw.
Cylinders	8
Cubic Inches	305
Compression Ratio	9.4:1
Max. Recommended RPM	4600-5000
Lower Unit Gear Ratio	1.62:1
Tilt	Power
Trim	Power
Length	32"
Width	30"
Height	22" (above crankshaft at CL)
Weight	1022 lbs. (pkg. weight)

<b>MerCruiser Model:</b>	<b>5.0L MPI EC Bravo III*</b>
Horsepower at Prop Shaft	260 hp/194 kw.
Cylinders	8
Cubic Inches	305
Compression Ratio	9.4:1
Max. Recommended RPM	4600-5000
Lower Unit Gear Ratio	2.20:1
Tilt	Power
Trim	Power
Length	32"
Width	30"
Height	22" (above crankshaft at CL)
Weight	1089 lbs. (pkg. weight)

\* CARB compliant.

**MerCruiser Model:**  
 Horsepower at Prop Shaft  
 Cylinders  
 Cubic Inches  
 Compression Ratio  
 Max. Recommended RPM  
 Lower Unit Gear Ratio  
 Tilt  
 Trim  
 Length  
 Width  
 Height  
 Weight

**MerCruiser Model:**  
 Horsepower at Prop Shaft  
 Cylinders  
 Cubic Inches  
 Compression Ratio  
 Max. Recommended RPM  
 Lower Unit Gear Ratio  
 Tilt  
 Trim  
 Length  
 Width  
 Height  
 Weight

**MerCruiser Model:**  
 Horsepower at Prop Shaft  
 Cylinders  
 Cubic Inches  
 Compression Ratio  
 Max. Recommended RPM  
 Lower Unit Gear Ratio  
 Tilt  
 Trim  
 Length  
 Width  
 Height  
 Weight

**MerCruiser Model:**  
 Horsepower at Prop Shaft  
 Cylinders  
 Cubic Inches  
 Compression Ratio  
 Max. Recommended RPM  
 Lower Unit Gear Ratio  
 Tilt  
 Trim  
 Length  
 Width  
 Height  
 Weight

**350 Magnum MPI EC Alpha\***  
 300 hp/224 kw.  
 8  
 350  
 9.4:1  
 4800-5200  
 1.47:1  
 Power  
 Power  
 32"  
 30"  
 22" (above crankshaft at CL)  
 1016 lbs. (pkg. weight)

**350 Magnum MPI EC Bravo I\***  
 300 hp/224 kw.  
 8  
 350  
 9.4:1  
 4800-5200  
 1.50 to 1.65:1  
 Power  
 Power  
 32"  
 30"  
 22" (above crankshaft at CL)  
 1057 lbs. (pkg. weight)

**350 Magnum MPI EC Bravo III\***  
 300 hp/224 kw.  
 8  
 350  
 9.4:1  
 4800-5200  
 2.00 to 2.20:1  
 Power  
 Power  
 32"  
 30"  
 22" (above crankshaft at CL)  
 1083 lbs. (pkg. weight)

**8.2 Magnum MPI EC Bravo III**  
 375 hp/280 kw.  
 8  
 496  
 9.1:1  
 4400-4800  
 2.00:1  
 Power  
 Power  
 35"  
 33"  
 24" (above crankshaft at CL)  
 1224 lbs. (pkg. weight)

\* CARB compliant.

## Volvo Penta Sterndrive Engine Information

### Volvo Penta Model:

Horsepower at Prop Shaft  
 Cylinders  
 Cubic Inches  
 Compression Ratio  
 Max. Recommended RPM  
 Lower Unit Gear Ratio  
 Tilt  
 Trim  
 Length  
 Width  
 Height  
 Weight

### 4.3 GL\*

190 hp/141 kw.  
 6  
 262  
 9.4:1  
 4600  
 1.79:1  
 Power  
 Power  
 32 1/4"  
 31"  
 20 1/4" (above crankshaft at CL)  
 876 lbs. (pkg. weight)

### Volvo Penta Model:

Horsepower at Prop Shaft  
 Cylinders  
 Cubic Inches  
 Compression Ratio  
 Max. Recommended RPM  
 Lower Unit Gear Ratio  
 Tilt  
 Trim  
 Length  
 Width  
 Height  
 Weight

### 4.3 GXI\*

225 hp/168 kw.  
 6  
 262  
 9.4:1  
 4800  
 1.60 to 1.66:1  
 Power  
 Power  
 32 1/2"  
 31"  
 22" (above crankshaft at CL)  
 896 lbs. (pkg. weight)

### Volvo Penta Model:

Horsepower at Prop Shaft  
 Cylinders  
 Cubic Inches  
 Compression Ratio  
 Max. Recommended RPM  
 Lower Unit Gear Ratio  
 Tilt  
 Trim  
 Length  
 Width  
 Height  
 Weight

### 4.3 GXI DP\*

225 hp/167 kw.  
 6  
 262  
 9.4:1  
 4800  
 1.95:1  
 Power  
 Power  
 32 1/2"  
 31"  
 21" (above crankshaft at CL)  
 916 lbs. (pkg. weight)

### Volvo Penta Model:

Horsepower at Prop Shaft  
 Cylinders  
 Cubic Inches  
 Compression Ratio  
 Max. Recommended RPM  
 Lower Unit Gear Ratio  
 Tilt  
 Trim  
 Length  
 Width  
 Height  
 Weight

### 5.0 GXI

270 hp/201 kw.  
 8  
 305  
 9.4:1  
 5000  
 1.60:1  
 Power  
 Power  
 37"  
 28 1/4"  
 22" (above crankshaft at CL)  
 1020 lbs. (pkg. weight)

\* CARB compliant. For Volvo engines with catalytic converters, see pages 77-78.

### Volvo Penta Model:

Horsepower at Prop Shaft  
Cylinders  
Cubic Inches  
Compression Ratio  
Max. Recommended RPM  
Lower Unit Gear Ratio  
Tilt  
Trim  
Length  
Width  
Height  
Weight

**5.0 GXi DP**  
270 hp/201 kw.  
8  
305  
9.4:1  
5000  
1.95:1  
Power  
Power  
37"  
28 1/4"  
22" (above crankshaft at CL)  
1040 lbs. (pkg. weight)

### Volvo Penta Model:

Horsepower at Prop Shaft  
Cylinders  
Cubic Inches  
Compression Ratio  
Max. Recommended RPM  
Lower Unit Gear Ratio  
Tilt  
Trim  
Length  
Width  
Height  
Weight

**5.7 Gi**  
300 hp/209 kw.  
8  
350  
9.4:1  
5000  
1.51:1  
Power  
Power  
37"  
28 1/4"  
22" (above crankshaft at CL)  
1020 lbs. (pkg. weight)

### Volvo Penta Model:

Horsepower at Prop Shaft  
Cylinders  
Cubic Inches  
Compression Ratio  
Max. Recommended RPM  
Lower Unit Gear Ratio  
Tilt  
Trim  
Length  
Width  
Height  
Weight

**5.7 Gi DP**  
300 hp/209 kw.  
8  
350  
9.4:1  
5000  
1.95:1  
Power  
Power  
37"  
28 1/4"  
22" (above crankshaft at CL)  
1040 lbs. (pkg. weight)

### Volvo Penta Model:

Horsepower at Prop Shaft  
Cylinders  
Cubic Inches  
Compression Ratio  
Max. Recommended RPM  
Lower Unit Gear Ratio  
Tilt  
Trim  
Length  
Width  
Height  
Weight

**8.1 Gi DP**  
375 hp/280 kw.  
8  
496  
9.1:1  
4600  
1.68:1  
Power  
Power  
41"  
33"  
21.4" (above crankshaft at CL)  
1258 lbs. (pkg. weight)

## Volvo Penta Sterndrive Engines with Catalytic Converter

### Volvo Penta Model:

Horsepower at Prop Shaft  
Cylinders  
Cubic Inches  
Compression Ratio  
Max. Recommended RPM  
Lower Unit Gear Ratio  
Tilt  
Trim  
Length  
Width  
Height  
Weight

### 5.0 GXiC\*

270 hp/201 kw.  
8  
305  
9.4:1  
5000  
1.95:1  
Power  
Power  
37"  
28 1/4"  
22" (above crankshaft at CL)  
1040 lbs. (pkg. weight)

### Volvo Penta Model:

Horsepower at Prop Shaft  
Cylinders  
Cubic Inches  
Compression Ratio  
Max. Recommended RPM  
Lower Unit Gear Ratio  
Tilt  
Trim  
Length  
Width  
Height  
Weight

### 5.0 GXiC DP\*

270 hp/201 kw.  
8  
305  
9.4:1  
5000  
1.95:1  
Power  
Power  
37"  
28 1/4"  
22" (above crankshaft at CL)  
1040 lbs. (pkg. weight)

### Volvo Penta Model:

Horsepower at Prop Shaft  
Cylinders  
Cubic Inches  
Compression Ratio  
Max. Recommended RPM  
Lower Unit Gear Ratio  
Tilt  
Trim  
Length  
Width  
Height  
Weight

### 5.7 GiC\*

300 hp/224 kw.  
8  
350  
9.4:1  
5000  
1.95:1  
Power  
Power  
37"  
28 1/4"  
22" (above crankshaft at CL)  
1040 lbs. (pkg. weight)

\* CARB compliant.



**Volvo Penta Model:**

Horsepower at Prop Shaft  
Cylinders  
Cubic Inches  
Compression Ratio  
Max. Recommended RPM  
Lower Unit Gear Ratio  
Tilt  
Trim  
Length  
Width  
Height  
Weight

**5.7 GiC DP\***

300 hp/224 kw.  
8  
350  
9.4:1  
5000  
1.95:1  
Power  
Power  
37"  
28 1/4"  
22" (above crankshaft at CL)  
1040 lbs. (pkg. weight)

**Volvo Penta Model:**

Horsepower at Prop Shaft  
Cylinders  
Cubic Inches  
Compression Ratio  
Max. Recommended RPM  
Lower Unit Gear Ratio  
Tilt  
Trim  
Length  
Width  
Height  
Weight

**8.1 GiC DP\***

400 hp/289 kw.  
8  
496  
9.1:1  
4600  
1.68:1  
Power  
Power  
41"  
33"  
21.4" (above crankshaft at CL)  
1258 lbs. (pkg. weight)

Notes:

**GLASTRON**<sup>®</sup>

The logo graphic consists of a thick, white, stylized arrow pointing to the right, positioned directly below the word 'GLASTRON'.

Glastron, LLC, 925 Frisbie Street, Cadillac, MI 49601  
Phone 800-354-3141 • Fax 320-433-2147