
GLASTRON | 2005



Product Specifications Manual

Table of Contents

Model Designator Key2
2005 Model Directory3
Glastron's Track Record
Glastron Performance5
SSV® Hull Design6
Unitized Deck/Floor7
VEC® Technology8-9
Sirius® Satellite Radio10
Glastron's Unmatched Warranty1
Glastron Warranty12-13
VEC® Warranty14-15
Features & Benefits16-17
Canvas Choices18
Seating Choices19
EZ Loader® Trailers20-21
Financing Guide22
Definitions of Measurements23
Model Specifications24-71
Sterndrive Engine Specifications 72-77

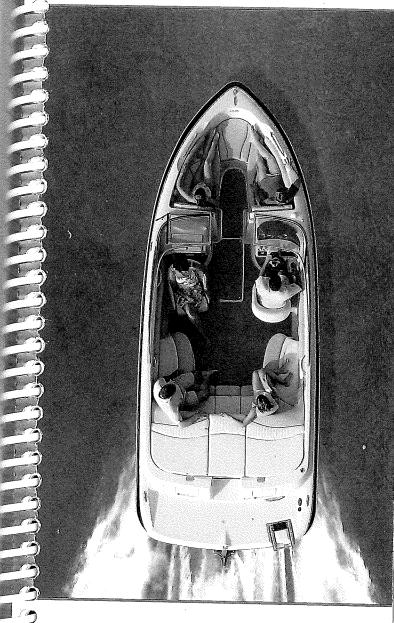

Model Designator Key

0 = Outboard5 = Open Bow Sterndrive9 = Cuddy Cabin Sterndrive

Example: the SX 170 is an outboard model.

Model Directory

SX Runabouts	
SX 170	2
SX 175	
SX 195	
MX Runabouts	
MX 175	D) (
MX 185	
	⊅∠
MX Ski & Fish	
MX 180 Ski & Fish	
MX 185 Ski & Fish	36
GX Runabouts	
GX 180	38
GX 185	40
GX 205	42
GX 205 WE	44
GX 235	46
GX 255	48
GX Ski & Fish	
GX 180 Ski & Fish	50
GX 185 Ski & Fish	
GX 205 Ski & Fish	
Deck Boats	
DX 205	F
DS 215	
DX 235	
	60
GS Sport Cruisers	,
GS 209	
GS 219	
GS 249	
GS 269	
GS 279	70

Glastron's Track Record

- Founded in 1956, Glastron was one of the very first large-scale manufacturers of fiberglass boats.
- Over the years, Glastron has been best known for their family runabouts. In fact, Glastron has manufactured more fiberglass runabouts than any other manufacturer—over 370,000 at last count.

C

C


C

C

C

C

- Glastron's product line today encompasses many types of trailerable family boats: **bowriders**, **ski & fish models**, **deck boats**, **cuddy cabins and twin-cabin cruisers**.
- Over the past decade, Glastron has experienced particularly impressive growth, earning them the distinction of being the industry's fastest growing fiberglass boat company.




Glastron Performance




- Glastron's penchant for performance is known throughout the industry.
- Glastron has collected dozens of design and performance awards over the years. Among them: twelve Product Excellence Awards from Powerboat magazine.
- Every Glastron model delivers performance attributes that every family boater can appreciate (and every Glastron owner knows):
 - **Very quick planing times** (and minimal bowrise)
 - Impressive top speeds
 - Low minimum planing speeds (particularly important for tubing, kneeboarding and wakeboarding)
 - Agile handling
 - Excellent fuel economy

SSV® Hull Design



- A boat's hull design is the most important thing that determines how that boat will perform. That's why Glastron has made hull design a top priority right from day one.
- The legendary **\$\$V® hull** (Super Stable Vee) is the biggest reason Glastron's runabouts plane, run and corner so well.
- In boating circles, people recognize the SSV hull as one of the bestperforming hulls ever designed. If there's any doubt, just ask any Glastron owner how well their boat performs.
- Glastron's SSV hull is patented; only Glastron has it. So no matter what other manufacturers may tell you, they don't have an SSV hull.

Unitized Deck/Floor



In 2005, most Glastron models are constructed with a unitized deck/floor.*

c 2


- The entire topside of the boat is fabricated as single fiberglass component (versus 2, 3 or more components in conventional construction).
- The top, sides and floor have no seams or joints, which provides a clean and seamless look.
- Unitized construction means unparalleled structural rigidity; in other words, a stronger boat.
- Another benefit: boats with a unitized deck/floor have a **quieter**, **smoother**, **more responsive ride**. So not only can you see the difference, but you can actually feel the difference.

*All except SX models and GS 209.

GLASTRON 2005

VEC® Technology

- VEC® (Virtual Engineered Composites) is a patented process developed by Genmar and introduced by Glastron.
- Other manufacturers build fiberglass boats using an open-mold process, a process that is labor-intensive, messy and imprecise. VEC, on the other hand, is a **closed-mold** process.



- The VEC system is a highly automated, computer-controlled manufacturing process—one that results in a near-perfect fiberglass boat hull every time.
- VEC construction eliminates the need for wood stringers. A fiberglass stringer system is bonded to the hull.

- Every VEC boat has a skid-resistant fiberglass floor.
- VEC is also a cleaner and more **environmentally friendly** way to build boats. The fiberglass lamination portion of the VEC manufacturing process reduces styrene emissions by 90% compared to conventional handlaid lamination.

C C C

C

C

- There's also a noticeable difference in the appearance of a VEC boat. It has a super-high-quality finish, both inside and out. The VEC hull is smooth and free of unsightly raw fiberglass and loose fiberglass strands.
- Glastron backs every VEC boat with the ultimate warranty: a **lifetime limited** warranty on all structural components.



Sirius® Satellite Radio

A Clarion® stereo system with Sirius® satellite radio is offered as standard equipment on many Glastron models.*

- Models included: GX bowriders, and ski & fish models, DX and DS deck boats, and GS sport cruisers.
- These models come with Clarion AM/FM/CD player, a Sirius receiver and a satellite antenna—all factory installed.
- Sirius offers over **100 streams of programming**, 24 hours a day,
 including commercial-free music, CNBC,
 ESPN, E! and Radio Disney.
- The first 12 months of Sirius service is paid by Glastron!
- What's more, Sirius satellite service is **interruptible one time.** (Example: new owner activates service from April to October 2005, suspends service for 6 months, then reactivates for the 2006 boating season.)
- Value to customer:

ide to editorrier.	
Clarion XMD3 stereo upgrade\$ 1	70
Sirius satellite receiver2	200
Shakespeare satellite antenna1	40
Installation1	00
Sirius 12-month subscription1	55
TOTAL VALUE \$ 7	65

*U.S. only

Glastron's Unmatched Warranty

Manufacturers of quality products tend to stand behind them, so the best way to judge the quality of a boat is to look at how well it's backed. When you compare Glastron warranties with those of other boat builders, you'll see that Glastron's are among the best in the marine industry.



C

C

C C

C C

C

C

C

C

C

C

C C C

C

C C C


- Every Glastron comes with a 5-year limited hull warranty.
 - Glastron also provides a **2-year**

limited warranty on other components.* That's twice as long as most boat builders.

- All wood components come with a lifetime limited warranty.
- Glastron's VEC® boats are backed with the ultimate warranty: a lifetime limited

warranty on structural

components (a portion of which is transferable to the second owner).





Glastron Limited Warranty

Glastron® Boats, a Division of Larson/Glastron Boats, Inc., a subsidiary of Genmar Holdings, Inc. warrants to the first retail purchaser of a new Glastron boat bought from a factory authorized dealer that the hull is free from defects in materials and workmanship for a period of five (5) years, and free from defects in materials and workmanship in other components for a period of two (2) years, measured from the date of retail sale. Glastron warrants that it will repair or replace, in its sole discretion, those parts of the boat manufactured by Glastron and which are found, within reasonable judgment of Glastron, to contain defects within the applicable warranty periods.

This Glastron boat, including any alleged defective part, must be returned to an authorized Glastron dealer within the warranty period to obtain warranty service. The Glastron dealer will carry out the warranty procedures on the Purchaser's behalf. All warranty work will be performed at an authorized dealer, at the Glastron factory or at another repair facility that Glastron selects. Purchaser is responsible for the expense associated with transporting the boat to and from the repair facility.

Glastron's obligation with respect to this warranty is limited to making repairs or replacement of parts, and no claim of breach of warranty shall be cause for cancellation or recession of the contract of sale of the Glastron boat. Any action for breach of warranty relating to a boat must be brought within a period of sixty (60) days following Glastron's failure to repair or replace alleged defects.

WHAT IS NOT COVERED:

This Warranty does not cover:

- A boat, including its components, that has been altered or modified so as to adversely affect its operation, performance or durability.
- Engines, outdrives, controls, propellers, batteries or other equipment or accessories which are not 2. manufactured by Glastron, whether or not warranted by other manufacturers.
- Gelcoat finishes (including blistering, and osmotic blistering, cracking, crazing or discoloration), mirrors, window glass, chrome and chrome painted fixtures, stainless steel or aluminum finishes.
- Leakage around windshields, hatches or other designed openings.

- Any boat which has been misused, used in a negligent manner, used for racing, used for rental or commercial purposes, used with an improper trailer or trailered improperly, used without proper maintenance, operated contrary to any instruction furnished by Glastron, or operated in violation of any Federal, State, Coast Guard or other governmental agency laws, rules or regulations.
- A boat which has been overpowered, according to the maximum recommended engine horsepower specified on the capacity plate, or which has had the transom altered with bracket or jack plate.
- Weight, speed, fuel economy or other estimated performance characteristics.
- Loss of time, inconvenience, rental charges, travel expense, loss of use, boat payments, in-and-out-ofwater charges, trailering or towing charges, storage charges, loss of or damage to personal property, or other remedies not specifically allowed.
- Dealer preparation, adjustments, alignments and cleaning in preparing the boat for delivery.
- 10. Repairs made necessary by normal wear and use.

Remedy under this warranty is expressly limited to repair or replacement of defects in materials or workmanship, and does not include incidental or consequential damages which are specially DISCLAIMED. NOTE: SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. The express limited warranty described on previous page is exclusive. All IMPLIED WARRANTIES ARE LIMITED IN THEIR DURATION TO THE ONE (1) YEAR WARRANTY PERIOD. ALL IMPLIED WARRANTIES, INCLUDING MERCHANTABILITY and FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED IN THEIR ENTIRETY AFTER EXPIRATION OF THE ONE (1) YEAR WARRANTY PERIOD. There are no warranties which extend beyond the description of the face hereof. NOTE: SOME STATES DO NOT ALLOW LIMITATION ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

This document contains the entire warranty given by Glastron. Glastron does not authorize any person or persons, including its Glastron dealers, to change the terms of this express limited warranty, which is Glastron's only warranty. Glastron reserves the right to change or improve the design or manufacture of Glastron boats without obligation to modify any boat previously manufactured.

VEC[®] Lifetime Limited Warranty

Glastron® Boats warrants to you, the first retail purchaser of this boat manufactured with VEC® technology, that it will repair or replace defects in materials or workmanship that occur within the applicable Warranty Periods, subject to the "What This Warranty Does Not Cover" section on the following page. The applicable Warranty Periods run from the date the boat is purchased.

WARRANTY PERIODS:

Defects in structural parts, including the hull, deck, floor, stringers and transom: As long as you own the boat.

C

C

C

C

C

C

C

しししししししし

Defects in factory installed parts and components: Two (2) year Warranty Period.

Defects in gelcoat cosmetics, including cracking, crazing, discoloration and fading: One (1) year Warranty Period.

Defects causing gelcoat blistering: Five (5) year Warranty Period, except that Glastron shall have no liability or responsibility to correct or repair any damage if the original gel surface has been altered in any way, including repair, application of any coating other than marine anti-fouling bottom paint, improper surface preparation for paint, or excessive sanding or sandblasting.

This warranty extends only to the first retail purchaser. Coverage remaining under the Warranty Periods (other than for structural parts) may be transferred once to a second owner upon written request made to Glastron within 15 days of purchase of the used boat. Requests for warranty transfer must be accompanied by a \$250 transfer fee and proof of purchase date. Glastron will repair structural defects in boats owned by registered warranty transfer owners for up to ten (10) years from the date of original delivery.

Your sole and exclusive remedy is the repair or replacement, at its sole option, of parts and components covered by this warranty.

This Glastron boat, including any alleged defective part, must be returned to an authorized Glastron dealer within the applicable warranty period to obtain warranty service. The Glastron dealer will carry out the warranty procedures on the owner's behalf. All warranty work will be performed at an authorized dealer, at the Glastron factory, or at another repair facility that Glastron selects. The owner is responsible for the expense associated with transporting the boat to and from the repair facility.

An action for breach of warranty shall be barred unless it is commenced within four (4) years from the date the cause of action accrues. An action for breach of any duty or obligation to repair or replace shall be barred unless it is commenced within one year from the date the cause of action accrues regardless of the time remaining in the Warranty Period.

WHAT THIS WARRANTY DOES NOT COVER:

- A boat purchased from any party other than an authorized Glastron dealer.
 A boat, including its components, that has been
- A boat, including its components, that has bee altered or modified so as to adversely affect its operation, performance or durability.
- 3. Gel coat surfaces including, but not limited to, cracking, crazing, discoloration, or blistering except as noted on previous page.
- 4. Engines, outdrives, controls, propellers, batteries and other equipment or accessories that are not manufactured by Glastron, whether or not warranted by other manufacturers.
- Windshield breakage and leakage around windshields, hatches or other designed openings.
- 6. Any boat that has been misused, used in a negligent manner, used for racing, used for rental or other commercial purposes, used without normal maintenance, operated contrary to any instruction furnished by Glastron, involved in an accident, or operated in violation of any Federal, State, Coast Guard or other governmental agency laws, rules or regulations.
- Weight, speed, fuel consumption, or other estimated performance characteristic.
- 8. Loss of time, inconvenience, boat payments, retail charges, travel expense, loss of use, haul out, launch, towing and storage charges, loss of or damage to personal property, or other remedies not specifically allowed.
- A boat that has been overpowered according to the maximum recommended engine horsepower specified on the capacity plate.
- 10. Canvas, zippers, vinyl, upholstery, plastics, fabric, or trim.11. Dealer preparation, cleaning, final adjustments and
- Dealer preparation, cleaning, final adjustments a alignments in preparing the boat for delivery.
- **12.** Repairs made necessary due to inadequate trailering or trailer support, or trailers that are improperly assembled designed or adjusted.

Remedy under this warranty is expressly limited to repair or replacement of defects in materials or workmanship, and does not include incidental or consequential damages that are specifically DISCLAIMED. Note: SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTIAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. The express limited warranty described above is exclusive. All IMPLIED WARRANTIES are LIMITED IN THEIR DURATION TO TWO (2) YEAR FROM THE DATE OF PURCHASE. IMPLIED WARRANTIES (IF ANY) INCLUDING MERCHANTABILITY and FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED IN THEIR ENTIRETY AFTER TWO (2) YEAR FROM THE DATE OF PURCHASE. There are no warranties which extend beyond the description on the face hereof. NOTE: SOME STATES DO NOT ALLOW LIMITATION ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS WHICH VARY FROM STATE TO STATE.

This document contains the entire warranty given by Glastron. Glastron does not authorize any person or persons, including Glastron dealers, to change the terms of this express limited warranty, which is Glastron's only warranty. Glastron reserves the right to change or improve the design or manufacture of Glastron boats without obligation to modify any boat previously manufactured.

Before your customers make a choice, make sure they know these facts.

FEATURES:

BENEFITS:

- Patented SSV® hull design
- Quick planing; superior handling; enhanced fuel economy
- Unitized deck construction on most models
- Seamless appearance; greater structural integrity = smooth, quiet, responsive ride
- VEC® construction on many models
- State-of-the-art technology with lifetime limited warranty on structural components
- Fiberglass floors stronger; easy cleanup
- Better appearance;
- 5. Where used, wood is marine grade, preservative-treated
- Lifetime warranty; no worry about wood rot
- Key structural areas are reinforced with multi-axial knitted fiberglass
- Double strength in this all-important area
- **7.** All deck fittings are backed by under-deck supports fiberglassed into deck
- Strength; durability
- Aircraft locknuts on bolts
- Strength; long-term durability
- One-piece, lock looped marine-grade carpet
- Better appearance; no seams

Marine-grade vinyl; 10. marine-grade stitching


UV protected

- Ski locker in many models
- Convenient storage for watersports toys
- Ski locker drain 12. in subfloor
- Lets water drain into bilge, keeping locker dry
- Tilt steering wheel standard on most models
- More comfortable steering position
- 14. Individual Faria® analog gauges
- Easy-to-read; lifetime warranty
- Gas fill is located on side of boat (never over swim platform)
- Eliminates risk of fuel spilling onto swim platform
- **16.** Low, built-in swim platform with stainless steel boarding ladder
- Ease of boarding
- Boarding ladder on runabouts is located on starboard side of swim platform
- Allows driver to see skier at all times when circling for pickup
- 18. Each model is carefully designed for the proper weight-to-horsepower ratio
- Better planing time; better fuel economy; better top speed
- Choice of MerCruiser® 19. or Volvo Penta® sterndrive power
- Customer can select preferred brand
- Choice of Mercury® 20. Yamaha®, Evinrude® or Johnson® on all outboard models
- Customer can select preferred brand

Canvas Choices







Rimini Tor



Canvas Package




C

c >

c 3

Camper Canvas Package



Bow Cover



Mooring Cover

SX models feature white vinyl.

MX 18-foot models feature beige Sunbrella® canvas.

GX models feature color-matched Sunbrella canvas.

DX models feature beige Sunbrella canvas.

DS 215 features color-matched Sunbrella canvas.

GS models feature blue Sunbrella canvas.

Cockpit Cover

Seating Choices



Sport Seating (SL)



Ski & Fish Seating (SF)



U-Shaped Seating (U)

GLASTRON 2005

EZ Loader Custom Boat Trailers

Glastron Boat Model	Trailer Model	Axle(s)
SX 170	GL 175ST	Single
SX 175 3.0L	GL 175ST	Single
SX 175 4.3L	EXL 2700	Single
SX 195	TRST 2900	Single
MX 175	GL 175E	Single
MX 180 SF	TRST 2900	Single
MX 185	TRST 3000	Single
MX 185 SF	TRST 30SA	Single w/Brakes
GX 180	EXL 2700	Single
GX 180 SF	EXL 2700	Single
GX 185	EXL 3000*	Single w/Brakes
GX 185 SF	EXL 3000*	Single w/Brakes
GX 205	EXL 3500*	Single w/Brakes
GX 205 WE	EXL 4000*	Tandem w/Brakes One Axle
GX 205 SF	EXL 4000*	Tandem w/Brakes One Axle
GX 235	EXL 5200*	Tandem w/Brakes One Axle
GX 255	EXL 5800*	Tandem w/Brakes One Axle
DX 205	EXL 4000*	Tandem w/Brakes One Axle
DS 215	EXL 5200*	Tandem w/Brakes One Axle
DX 235	EXL 5800*	Tandem w/Brakes One Axle
GS 209	EXL 4000	Tandem w/Brakes One Axle
GS 219	EXL 4400*	Tandem w/Brakes One Axle
GS 249 (Non-Package)	EXL 7500*	Tandem w/Brakes One Axle
GS 269 (Non-Package)	EXL 7500*	Tandem w/Brakes One Axle
GS 279 (Non-Package)	EXL 7500*	Tandem w/Brakes One Axle

2005 Standard EXL Features: Tube Construction, Steel Fenders, Double Bunks, Aluminum Steps, Chrome Rims, Underslung Space Carrier, Swing Tongue Standard on all Trailers thru the EXL 4000

2005 Standard TRST Features: Tube Construction, Steel Fenders, Single Bunks, Alumalook Wheels, Blackwall Bias Tires, Painted Steel Steps

* Brakes on One Axle Standard EXL 3000 up to EXL 7500

EZ Loader Standard Galvanized Bunk Trailers

C C

C C C C C C

C

C

CHESS A CRESS TO	ENCORER BRESIDES
Glastron Boat Model	Trailer Model
SX 170	EZL96B 15-18 2800NB
SX 175 3.0L	EZL96B 15-18 2800NB
SX 175	EZL96B 15-18 2800NB
SX 195	EZL96B 17-20 3100H1X
MX 175 (Non-Package)	EZL96B 15-18 2800NB
MX 180 SF	EZL96B 17-20 2800NB
MX 185	EZL96B 17-20 3100H1X
MX 185 SF	EZL96B 17-20 3100H1X
GX 180	EZL96B 17-20 2800NB
GX 180 SF	EZL96B 17-20 2800NB
GX 185	EZL96B 17-20 3100H1X
GX 185 SF	EZL96B 17-20 3100H1X
GX 205	TEZL96B 17-20/22 4000H1X
GX 205 WE	TEZL96B 17-20/22 4000H1X
GX 205 SF	TEZL96B 17-20/22 4000H1X
GX 235	TEZL96B 19-22 4700H1X
GX 255	TEZB 23-25/27 5800H1X
DX 205	TEZL96B 17-20/22 4000H1X
DS 215	TEZL96B 17-20/22 4000H1X
DX 235	TEZB 19-22/24 5200H1X
GS 209	TEZL96B 17-20/22 4000H1X
GS 219	TEZL96B 19-22 4700H1X
GS 249 (Non-Package)	TEZB 23-25/27 5800H1X
GS 269 (Non-Package)	TEZB 23-25/27 7500H1X
GS 279 (Non-Package)	TEZB 23-25/27 7500H1X
- ·	

EZ Loader Standard Aluminum Bunk Trailers

Glastron Boat Model	Trailer Model
SX 170	ALB 16-18 2800NB
SX 175 3.0L	ALB 16-18 2800NB
SX 175	ALB 16-18 2800NB
SX 195	ALB 18-20 3100H1X
MX 175 (Non-Package)	ALB 16-18 2800NB
MX 180 SF	ALB 18-20 2800NB
MX 185	ALB 18-20 3100H1X
MX 185 SF	ALB 18-20 3100H1X
GX 180	ALB 18-20 2800NB
GX 180 SF	ALB 18-20 2800NB
GX 185	ALB 18-20 3100H1X
GX 185 SF	ALB 18-20 3100H1X
GX 205	TALB 18-21 4000H1X
GX 205 WE	TALB 18-21 4000H1X
GX 205 SF	TALB 18-21 4000H1X
GX 235	TALB 20-23 4600H1X
GX 255	TALB 21-25 6200H1X
DX 205	TALB 18-21 4000H1X
DS 215	TALB 20-23 4600H1X
DX 235	TALB 21-25 6200H1X
GS 209	TALB 18-21 4000H1X
GS 219	TALB 20-23 4600H1X
GS 249 (Non-Package)	TALB 23-27 6200H1X
GS 269 (Non-Package)	TALB 23-27 7900 H1X
GS 279 (Non-Package)	TALB 23-27 7900 H1X

Monthly Payments

C

C

C

C

Length of Loan	Interest Rate	Payment Per \$1000
3 years	6.00%	30.42
	6.50%	30.65
	7.00%	30.88
	7.50%	31.11
	8.00%	31.34 31.57
	8.50%	31.57
	9.00%	31.80
5 years	6.00%	19.33
	6.50%	19.57
	7.00%	19.80
	7.50%	20.04
	8.00%	20.28
	8.50%	20.52
	9.00%	20.76
7 years	6.00%	14.61
	6.50%	14.85
	7.00%	15.09
	7.50%	15.34
	8.00%	15.59
	8.50% 9.00%	15.84
• • • • • • • • • • • • • • • • • • •	6.00%	16.09
8 years	6.50%	13.14
	7.00%	13.39 13.63
	7.50% 7.50%	13.88
	8.00%	14.14
	8.50%	14.39
	9.00%	14.65
10 years	6.00%	11.10
	6.50%	11.35
	7.00%	11.61
	7.50%	11.87
	8.00%	12.13
	8.50%	12.40
	9.00%	12.67
12 years	6.00%	9.76
	6.50%	10.02
	7.00%	10.28
	7.50%	10.55
	8.00%	10.82
	8.50%	11.10
	9.00%	11.38
15 years	6.00%	8.44
	6.50%	8.71
	7.00%	8.99
	7.50%	9.27
	8.00%	9.56
	8.50%	9.85
	9.00%	10.14

Definitions of Measurements

- **Length Overall (LOA)** Distance along the centerline from the tip of the bow to the aft-most part of the hull.
- Maximum Beam Maximum width of the boat.
- **Transom Width** Maximum width of the boat at the transom.
- **Depth** Vertical distance from the lowest point of the keel to the highest point of the boat, excluding windshields, lights and other removable components.
- **Transom Deadrise** Angle of the hull at the transom, as measured in degrees, relative to the water.
- **Maximum Depth** Vertical distance from the lowest point of the keel to the highest point of the boat, including windshields.
- **Cockpit Depth** Vertical distance from the boat floor to the top of gunwale as measured at the driver's seat.
- **Length Overall on Trailer** Distance measured along the boat centerline, from forward-most point of trailer to aft-most point of motor/outdrive.
- **Boat Height on Trailer** Vertical distance from the ground to the highest point of boat, including the windshield.
- **Draft (drive unit up)** Total number of inches of boat and/or motor and drive unit below the waterline. Measured unloaded, with the motor/drive unit in the full up position.
- **Draft (drive unit down)** Total number of inches of boat and/or motor and drive unit below the waterline. Measured unloaded, with the motor/drive unit in the full down position.

SX 170



Specifications

LOA 17' 1" (5.21 m.)
Beam 88" (2.24 m.)
Depth 43" (1.09 m.)
Maximum Depth 59" (1.50 m.)
Cockpit Depth 28½" (.72 m.)
Approx. Wt. 1440 lbs. (653 kg.)
w/o engine

Transom Width 86" (2.18 m.)

Transom Deadrise 21°
LOA on Trailer 21' 6" (6.55 m.)
Fuel Capacity 23 gal. (87 L.)
Maximum Load 1890 lbs. (857 kg.)
Max. Persons 8 or 1175 lbs. (533 kg.)
Max. Horsepower 150 (112 kw.)
NMMA Certified

Draft: A. Drive Unit Up 15½" (.39 m.) **B. Drive Unit Down** 28½" (.72 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, & fuel gauges; plus switches for bilge pump, navigation/anchor lights, panel lights, horn & accessories Automatic bilge pump

Automatic bilge pump Electric horn Snap-in carpet Navigation lighting AM/FM stereo cassette w/2 speakers Ski/kneeboard locker Glove box 6" cleats Walk-thru curved windshield Fiberglass floor Bow seats w/storage Stainless steel bow eye & stern eyes Passenger grab handles SL seating: 2 bucket seats/aft bench seat/sunlounge Molded swim platform Stainless steel boarding ladder

Options

Soft top w/concealed storage & boot Canvas Package: bow cover, walk-thru curtain, side curtains & stern curtain Bimini top w/boot Cockpit cover Bow cover Mooring cover Dual cable steering
Tilt steering
Ski tow pylon
Convenience Package: hour meter
& depth sounder
AM/FM/CD stereo
Flip-up bucket seat — (1) each

Color Choices

White w/Blue Graphics

White w/Red Graphics

White w/Yellow Graphics

GLASTRON 2005

Engine Choices

Johnson 90 PLSO	Evinrude 115 FPLSO
Johnson 115 PLSO	Evinrude 135 FPLSO
Johnson 115 PL4SO	Evinrude 150 FPLSO
Johnson 150 PLSO	Mercury 90 ELPTO
Yamaha 90 TLRD	Mercury 115 ELPTO
Yamaha 115 TLRD	Mercury 125 ELPTO
Yamaha F 115 TLRD	Mercury 135 L Optimax
Yamaha 150 TLRD	Mercury 150 L XR6

Performance

ingine: Johnson 115 FastStrike, Prop: 14 x 19				
RPM	MPH	GPH	RANGE*	
2500	15	2.9	107	
3200	25	4.2	123	
4200	35	6.3	115	
WOT	43-45	_	_	
0.20 MPH Accelerat	ion: 3.5 sec.			

Engine: Johnson 15			
RPM	мрн	GPH	RANGE [*]
2400	15	3.7	84
3300	30	5.0	124
4500	40	7.5	110
WOT	49-52	****	_

0-20 MPH Acceleration: 3.2 sec.

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat		\$
Motor	_H.P.	
Trailer		
Accessories		
T, T & L		
	TOTAL PRICE	· \$

SX 175



C

C

C

C

C

C

Specifications

LOA 17' 1" (5.21 m.) Beam 88" (2.24 m.) Depth 43" (1.09 m.) Maximum Depth 59" (1.50 m.) Cockpit Depth 28½" (.73 m.) Approx. Wt. 2050 lbs. (930 kg.) w/3.0 GL Volvo Penta® Transom Deadrise 21°
Transom Width 86" (2.18 m.)
LOA on Trailer 21' 6" (6.55 m.)
Fuel Capacity 23 gal. (87 L.)
Maximum Load 1150 lbs. (522 kg.)
Max. Persons 8 or 1150 lbs. (522 kg.)
NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.) **B. Drive Unit Down** 31" (.79 m.)

Standard Features

Instrument panel includes:
speedometer, tachometer, trim,
fuel, oil pressure, voltmeter and
engine temperature gauges; plus
switches for bilge pump, blower,
horn, lights and accessories
Electric horn
Bilge pump & blower
Navigation lighting
AM/FM stereo cassette w/2 speakers
Ski/kneeboard locker
Ski tow ring
Snap-in carpet

Stainless steel boarding ladder
Stainless steel bow eye & stern eyes
6" cleats
Walk-thru curved windshield
Bow seats w/storage
Fiberglass floor
Passenger grab handles
SL seating: 2 bucket seats/aft bench
seat/sunlounge
Molded swim platform
Merc/Volvo prop
Glove box

Options

Soft top w/concealed storage & boot Canvas Package: bow cover, walk-thru curtain, side curtains & stern curtain Bimini top w/boot Cockpit cover Bow cover Mooring cover Convenience Package: hour meter, depth sounder, automatic bilge pump
High altitude prop
Tilt steering
AM/FM/CD stereo
Telescopic 3-step boarding ladder
Flip-up bucket seat — (1) each

Color Choices

White w/Blue Graphics

White w/Red Graphics

White w/Yellow Graphics

GLASTRON 2005

Engine Choices

3.0L MerCruiser (WPS) (135) 4.3L MerCruiser (190) 3.0 GL Volvo Penta (WPS) (135) 4.3 GL Volvo Penta (190)

Performance

Engine: 3.0 GL Volvo Penta, Prop: 14½ x 19

RPM	MPH	GPH	RANGE*
2000	10	2.1	99
3000	20	3.2	129
4000	35	7.6	95
WOT	40-43		
On MOU Accolorat	ion, 2 9 soc		

0-20 MPH Acceleration: 3.8 sec.

Engine: 4.3L MerCruiser, Prop: 14% x 23

RPM	MPH	GPH	RANGE*
2400	15	3.0	104
3200	35	5.0	145
4000	45	8.5	110
WOT	48-50	_	_

0-20 MPH Acceleration: 3.5 sec.

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat		\$
Motor	H.P.	
Trailer		
Accessories		
T, T & L		
	TOTAL PRIC	E \$

26



Specifications

LOA 18' 7" (5.66 m.)

Beam 90%" (2.31 m.)

Depth 47" (1.19 m.)

Maximum Depth 63" (1.60 m.)

Cockpit Depth 28%" (.72 m.)

Approx. Wt. 2535 lbs. (1150 kg.)

w/4.31. MerCruiser®

Transom Deadrise 21°
Transom Width 88" (2.24 m.)
LOA on Trailer 22' (6.71 m.)
Fuel Capacity 31 gal. (117 L.)
Maximum Load 1275 lbs. (578 kg.)
Max. Persons 9 or 1275 lbs. (578 kg.)
NMMA Certified

Draft: A. Drive Unit Up 16½° (.42 m.) **B. Drive Unit Down** 31½° (.80 m.)

Standard Features

Instrument panel includes:
speedometer, tachometer, trim,
fuel, oil pressure, voltmeter and
engine temperature gauges; plus
switches for bilge pump, blower,
horn, lights and accessories
Electric horn
Bilge pump & blower
Navigation lighting
AM/FM stereo cassette w/2 speakers
Ski/kneeboard locker
Ski tow ring
Fiberglass floor

Snap-in carpet
Stainless steel bow eye & stern eyes
Walk-thru curved windshield
Bow seats w/storage
Passenger grab handles
SL seating: 2 bucket seats/aft bench
seat/sunlounge
6" cleats
Molded swim platform
Stainless steel boarding ladder
Merc/Volvo prop
Glove box

Options

Soft top w/concealed storage & boot Canvas Package: bow cover, walk-thru curtain, side curtains & stern curtain Bimini top w/boot Cockpit cover Bow cover Mooring cover Convenience Package: hour meter, depth sounder, automatic bilge pump
Tilt steering
AM/FM/CD stereo
High altitude prop
Telescopic 3-step boarding ladder
Flip-up bucket seat — (1) each

Color Choices

White w/Blue Graphics

White w/Red Graphics

White w/Yellow Graphics

Engine Choices

3.0L MerCruiser (WPS) (135)	3.0 GL Volvo Penta (WPS) (135)
4.3L MerCruiser (190)	4.3 GL Volvo Penta (190)
4.3L MPI MerCruiser (220) 5.0L MerCruiser (220) 5.0L MPI MerCruiser (260)	4.3 GXi Volvo Penta (225) 5.0 GL Volvo Penta (220) 5.0 GXi Volvo Penta (270)

Performance

Engine: 3.0 GL Volvo Penta, Prop: 14½ x 19				
RPM	MPH	GPH	RANGE*	
2000	10	2.1	133	
3000	20	3.2	174	
4000	35	7.6	128	
WOT	39-42	_	*****	
0-20 MPH Accelerati	on: 3.9 sec.			
Engine: 4.3L MerCr	uiser, Prop: 14¼ x 2	:3		

Engine: 4.3L MerCruiser, Prop: 14¼ x 23				
RPM	MPH	GPH	RANGE*	
2000	15	2.8	149	
3000	25	3.8	183	
4000	35	6.9	142	
WOT	47-49	_	_	
0-20 MPH Accelerati	on: 3.5 sec.			

Engine: 5.0 GL Volvo Penta, Prop: 14¼ x 21				
RPM	MPH	GPH	RANGE*	
2500	15	3.5	120	
3500	40	8.5	131	
4000	45	9.8	128	
WOT	51-53	840000		

0-20 MPH Acceleration: 3.3 sec.

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Boat		\$
Motor	_H.P.	
Trailer		Lance and the second se
Accessories		
T, T & L		
	TOTAL PRICE	•

MX 175



Specifications

LOA 17' 1" (5.21 m.)
Beam 88" (2.24 m.)
Depth 44" (1.12 m.)
Maximum Depth 57" (1.45 m.)
Cockpit Depth 28½" (.72 m.)
Approx. Wt. 2025 lbs. (919 kg.)
W/3.0 GL Volvo Penta®

Transom Width 86" (2.18 m.)
Transom Deadrise 21°
LOA on Trailer 20' 8" (6.30 m.)
Fuel Capacity 23 gal. (87 L.)
Maximum Load 1100 lbs. (499 kg.)
Max. Persons 7 or 1000 lbs. (454 kg.)
NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.)

B. Drive Unit Down 31" (.79 m.)

Standard Features

Instrument panel includes:
speedometer, tachometer, trim,
fuel, oil pressure, voltmeter &
engine temperature gauges; plus
switches for bilge pump, blower,
horn, lights & accessories
Electric horn
Bilge pump & blower
Navigation lighting
Ski/kneeboard locker
Ski tow ring

Stainless steel boarding ladder
Stainless steel bow eye & stern eyes
6" cleats
Walk-thru curved windshield
Bow seats w/storage
Unitized fiberglass deck/floor
Passenger grab handles
Molded swim platform
Merc/Volvo prop
SL seating: 2 bucket seats/aft bench
seat/sunlounge

Options

Limited Edition Package: walk-thru glass windshield w/open side wings, deluxe bucket seats, lockable glove box, Clarion® AM/FM/CD stereo, side panel storage trays w/recessed speakers, rear passenger arm rests, snap-in carpet & LE exterior graphics package

Color Choices

White w/Blue Graphics

GLASTRON 2005

Engine Choices

3.0L MerCruiser (WPS) (135)

3.0 GL Volvo Penta (WPS) (135)

Performance

Engine: 3.0 GL Volv	o Penta, Prop: 14½	GPH GPH	RANGE*
RPM ·	MPH		
2000	10	2.1	99
	, -	3.2	129
3000	20		95
4000	35	7.6	93
	40-43		
WOT	- CF-UF		

0-20 MPH Acceleration: 3.8 sec.

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat	\$
MotorH.F	
Trailer	
Accessories	
T, T & L	

TOTAL PRICE \$



Specifications

LOA 18' (5.49 m.)
Beam 91" (2.31 m.)
Depth 43" (1.09 m.)
Maximum Depth 53" (1.35 m.)
Cockpit Depth 29½" (.75 m.)
Approx. Wt. 2610 lbs. (1184 kg.)
w/4.3 GL Volvo Penta®

Transom Deadrise 21°
Transom Width 86" (2.18 m.)
LOA on Trailer 22' 4" (6.81 m.)
Fuel Capacity 29 gal. (110 L.)
Maximum Load 1200 lbs. (544 kg.)
Max. Persons 8 or 1200 lbs. (544 kg.)
NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.) B. Drive Unit Down 31" (.79 m.)

Standard Features

Instrument panel includes:
speedometer, tachometer, trim,
fuel, oil pressure, voltmeter &
engine temperature gauges;
switches for bilge pump plus horn,
lights & accessories
Electric horn
Navigation lighting
AM/FM stereo cassette w/2speakers
Glove box
Ski tow ring
Hinged ski locker
Stainless steel bow eye & stern eyes
Bilge pump & blower

Passenger grab handles
Molded swim platform
6" cleats
Telescopic 3-step boarding ladder
Bow seats w/storage
Unitized fiberglass deck/floor
Snap-in carpet
Walk-thru curved glass windshield
w/open side wings
Merc/Volvo prop
Courtesy lights
SL seating: SuspensionAire
adjustable bucket seats w/flip-up
bolsters/aft bench seat/sunlounge

Options

Sunbrella® soft top & boot w/concealed storage Canvas Package Bimini top w/boot Cockpit cover Bow cover Mooring cover Black hull & deck stripes AM/FM/CD stereo
Full side glass windshield
Convenience Package: hour
meter, depth sounder & automatic
bilge pump
High altitude prop
Tilt steering

Color Choices

Beige w/Black Graphics

Engine Choices

3.0L MerCruiser (WPS) (135)	3.0 GL Volvo Penta (WPS) (135)
4.3L MerCruiser (190)	4.3 GL Volvo Penta (190)
4.3L MPI MerCruiser (220)	4.3 GXi Volvo Penta (225)

Performance

Engine: 3.0L WerCr	uiser, Prop: 14½ x 19			
RPM	MPH	GPH	İ	RANGE:
2100	. 15	2.5		157
2900	25	3.5		186
3500	35	7.4		123
WOT	42-44			_
0-20 MPH Acceleration	on: 3.4 sec.			

Engine: 3.0 GL Volvo Penta, Prop: 14½ x 19				
RPM	MPH	GPH	RANGE	
2000	10	2.1	124	
3000	20	3.2	163	
4000	35	7.6	120	
WOT	41-43	_		

0-20 MPH Acceleration: 3.7 sec.

Engine: 4.3 GL Volvo Penta, Prop: 14½ x 19				
RPM	MPH	GPH	RANGE*	
2200	15	3.0	131	
2900	25	4.0	163	
3400	35	7.9	116	
WOT	48-50		_	
0-20 MPH Acceleration	n: 3.2 sec.			

Engine: 4.3 GXi Volvo Penta, Prop: 14½ x 19			
RPM	MPH	GPH	RANGE*
2500	24	3.5	179
3500	38	8.1	122
WOT	49-52	_	-

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

0-20 MPH Acceleration: 2.9 sec.

Boat	\$
MotorH.P.	
Trailer	
Accessories	
T, T & L	
TOTAL PRIC	CE \$



Specifications

LOA 18' (5.49 m.) Beam 91" (2.31 m.) Depth 43" (1.09 m.) Maximum Depth 53" (1.35 m.) Cockpit Depth 29%" (.75 m.) Approx. Wt. 1720 lbs. (780 kg.)

w/o Engine Transom Deadrise 21° Transom Width 86" (2.18 m.) LOA on Trailer 22' 2" (6.76 m.) Fuel Capacity 29 gal. (110 L.) Maximum Load 1880 lbs. (853 kg.) Max. Persons 8 or 1225 lbs. (556 kg.) Max. Horsepower 150 (112 kw.) NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.) B. Drive Unit Down 29" (.74 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel & trim gauges; plus switches for bilge pump, horn, navigation/anchor lights, panel lights & accessories Bow panel includes: aerator switch, voltmeter, tilt switch, battery charger switch, battery selector switch, trolling motor plug AM/FM stereo cassette w/speakers Electric horn Navigation lighting Telescopic 3-step boarding ladder Stainless steel bow eye & stern eyes Passenger grab handles Molded swim platform Hinged ski locker Glove box

Aerated livewell Trolling motor mount Rod holders Tackle box trays Dual cable steering Reversible bow seats/fishing deck Bilge pump & blower 6" cleats Courtesy lights Walk-thru curved glass windshield w/open side wings Bow seats w/storage Unitized fiberglass deck/floor Snap-in carpet SuspensionAire adjustable bucket seats w/flip-up bolsters/2 removable fishing seats/aft bench seating

ヒヒヒヒ

ここここ

Options

Sunbrella® soft top & boot w/concealed storage Canvas Package: bow cover, walk-thru curtain, side curtains & stern curtain Bimini top w/boot Cockpit cover Bow cover Mooring cover AM/FM/CD stereo

Tilt steering Black hull & deck stripes Convenience Package: hour meter, depth sounder & automatic bilge pump Fishing Package: trolling motor, fish finder Full side glass windshield

Color Choices

Beige w/Black Graphics

Ski tow pylon

Engine Choices

Johnson 115 PLSO	Evinrude 115 FPLSO
Johnson 115 PL4SO	Evinrude 135 FPLSO
Johnson 150 PLSO	Evinrude 150 FPLSO
Yamaha 115 TLRD	Mercury 115 ELPTO
Yamaha F 115 TLRD	Mercury 125 ELPTO
Yamaha 150 TLRD	Mercury 135 L Optimax
Yamaha F 150 TLRD	Mercury 150 L XR6
	Mercury 150 L EFI
	Mercury 150 L Optimax

Performance

Engine: 115 Johnso	on, Prop: 14 x 17		
RPM	MPH	GPH	RANGE*
2500	15	3.6	109
3300	25	4.6	142
4700	35	7.2	127
WOT	42-44	_	
0-20 MPH Accelerati	ion: 3.2 sec.		

Engine: 135 L Optimax Mercury (V6), Prop: 14¼ x 21			
RPM	MPH	GPH	RANGE*
2400	15	4.2	93
3000	25	5.1	128
4000	35	7.1	129
WOT	46-49	_	_

0-20 MPH Acceleration: 3.1 sec.

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Boat	\$
MotorH.P.	***************************************
Trailer	
Accessories	
T, T & L	
TOTAL DDI	ICE &

Specifications

LOA 18' (5.49 m.)
Beam 91" (2.31 m.)
Depth 43" (1.09 m.)
Maximum Depth 53" (1.35 m.)
Cockpit Depth 29½" (.75 m.)
Approx. Wt. 2640 lbs. (1197 kg.)
w/4.3 Gl. Volvo Penta®

Transom Deadrise 21°
Transom Width 86" (2.18 m.)
LOA on Trailer 22' 4" (6.81 m.)
Fuel Capacity 29 gal. (110 l.)
Maximum Load 1200 lbs. (553 kg.)
Max. Persons 8 or 1200 lbs. (553 kg.)
NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.)

B. Drive Unit Down 31" (.79 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter & engine temperature gauges; plus switches for bilge pump, blower, horn, light & accessories Bow panel includes: aerator switch, voltmeter, tilt switch, battery charger switch, battery selector switch, trolling motor plug Electric horn Navigation lighting AM/FM stereo cassette w/2 speakers Glove box Hinged ski locker Ski tow ring 6" cleats Walk-thru curved glass windshield w/open side wings Unitized fiberglass deck/floor

Courtesy lights Reversible bow seats/fishing deck Bow seats w/storage SuspensionAire adjustable bucket seats w/flip-up bolsters/2 removable fishing seats/aft bench seating Passenger grab handles Molded swim platform Convertible stern sundeck/fishing platform Bilge pump & blower Aerated livewell Trolling motor mount Rod holders Tackle box trays Merc/Volvo prop Telescopic 3-step boarding ladder Snap-in carpet

Options

Sunbrella® soft top & boot w/concealed storage
Canvas Package: bow cover, walk-thru curtain, side curtains & stern curtain
Bimini top w/boot
Cockpit cover
Bow cover
Tilt steering
Full side glass windshield

Color Choices

Beige w/Black Graphics

Mooring cover
AM/FM/CD stereo
Convenience Package: hour meter,
depth sounder & automatic bilge
pump
High altitude prop
Fishing Package: trolling motor,
fish finder
Black hull & deck stripes

Engine Choices

3.0L MerCruiser (WPS) (135) 4.3L MerCruiser (190) 4.3L MPI MerCruiser (220)

3.0 GL Volvo Penta (WPS) (135) 4.3 GL Volvo Penta (190) 4.3 GXi Volvo Penta (225)

Performance

Engine: 3.0L MerCruiser, Prop: 14½ x 19				
RPM	MPH	GPH	RANGE*	
2100	15	2.5	157	
2900	25	3.5	186	
3500	35	7.4	123	
WOT	42-44	_	_	
0-20 MPH Accelerat	ion: 3.4 sec.			

Engine: 3.0 GL Volvo Penta, Prop: 14½ x 19				
RPM	MPH	GPH	RANGE*	
2000	10	2.1	124	
3000	20	3.2	163	
4000	35	7.6	120	
WOT	41-43	_	_	
0-20 MPH Accelerati	ion: 3.7 sec.			

Engine: 4.3 GL Volvo Penta, Prop: 14½ x 19				
RPM	MPH	GPH	RANGE*	
2200	15	3.0	131	
2900	25	4.0	163	
3400	35	7.9	116	
WOT	48-50		_	
0-20 MPH Acceleration	n: 3.2 sec.			

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above,

and based on 90 percent of boat's fuel capacity.

Boat		\$
Motor	_H.P.	
Trailer		
Accessories		
T, T & L		





C

C

C

C

•

C

Specifications

LOA 18' (5.49 m.) Beam 91" (2.31 m.) Depth 43" (1.09 m.) Maximum Depth 53" (1.35 m.) **Cockpit Depth** 29½" (.75 m.) Approx. Wt. 1710 lbs. (776 kg.) w/o engine Transom Width 86" (2.18 m.)

Transom Deadrise 21° LOA on Trailer 22' 2" (6.76 m.) Fuel Capacity 29 gal. (110 L.) Maximum Load 1880 lbs. (853 kg.) Max. Persons 8 or 1225 lbs. (556 kg.) Max. Horsepower 150 (112 kw.) NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.) B. Drive Unit Down 29" (.74 m.)

Standard Features

Automatic bilge pump Stainless steel bow eye & stern eyes Instrument panel includes: Walk-thru curved full glass speedometer, tachometer, trim, windshield fuel and trim gauges; plus switches Bow seats w/hinged bow backrest for bilge pump, navigation/anchor w/storage lights, panel lights, horn & Stainless steel passenger grab accessories: hour meter & handles depth sounder SuspensionAire adjustable bucket seats Clarion Stereo CD/Sirius satellite w/flip-up bolsters/aft bench seat w/4 speakers Molded swim platform Glove box Hinged ski locker Tilt steering Courtesy lights Telescopic 3-step boarding ladder Electric horn Dual cable steering Navigation lighting Unitized fiberglass deck/floor Convenience Package: hour Snap-in carpet meter, depth sounder & automatic 6" cleats bilge pump

Options

Color-coordinated Sunbrella® soft top & boot Color-coordinated Canvas Package: bow cover, walk-thru curtain, side curtains & stern curtain Color-coordinated Bimini top w/boot

Color-coordinated cockpit cover Color-coordinated bow cover Mooring cover Ski tow pylon Stereo remote for dash

Color Choices

Beige/Laguna Blue Beige/Cranberry Red Beige/Jet Black Beige/Radiant Yellow

Engine Choices

Johnson 115 PLSO	Evinrude 115 FPLSO
Johnson 115 PL4SO	Evinrude 135 FPLSO
Johnson 150 PLSO	Evinrude 150 FPLSO
Yamaha 115 TLRD	Mercury 115 ELPTO
Yamaha F 115 TLRD	Mercury 125 ELPTO
Yamaha 150 TLRD	Mercury 135 L Optimax
Yamaha F 150 TLRD	Mercury 150 L XR6
	Mercury 150 L EFI
	Mercury 150 L Optimax

Performance

Engine: 90 Johnson			
RPM	MPH	GPH	RANGE*
2500	15	2.9	134
3400	25	4.2	155
4600	35	6.3	145
WOT	38-40	_	_
0-20 MPH Accelerati	ion: 3.3 sec.		

Engine: 115 Johnso	on, Prop: 14 x 19		
RPM	MPH	GPH	RANGE*
2500	15	3.6	108
3300	25	4.6	142
4700	35	7.2	127
WOT	42-44		_
0-20 MPH Accelerat	ion: 3.2 sec.		

Engine: 135 L Optio	nax Mercury (V6),	Prop: 14¼ x 21	
RPM .	MPĤ ` ^	. GPH	RANGE ¹
2400	15	4.2	93
3000	25	5.1	128
4000	35	7.1	129
WOT	46-49	Account	******
0-20 MPH Accelerati	on: 3.1 sec.		

Note: All with two persons and full tank of fuel. Performance results will vary

depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Boat		\$
Motor	H.P.	
Trailer		
Accessories		-
T, T & L		
	TOTAL PRIC	E \$



Specifications

LOA 19' 11" (6.07 m.)
Beam 96" (2.44 m.)
Depth 45¾" (1.16 m.)
Maximum Depth 56¾" (1.44 m.)
Cockpit Depth 32" (.81 m.)
Approx. Wt. 3045 lbs. (1381 kg.)
w/5.0 GL Volvo Penta®

Transom Deadrise 21°
Transom Width 92" (2.34 m.)
LOA on Trailer 24' 9" (7.54 m.)
Fuel Capacity 35 gal. (132 L.)
Maximum Load 1475 lbs. (669 kg.)
Max. Persons 10 or 1475 lbs. (669 kg.)
NMMA Certified

Draft: A. Drive Unit Up 16½" (.42 m.) **B. Drive Unit Down** 31½" (.80 m.)

Standard Features

Automatic bilge pump & blower Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter & engine temperature gauges; plus switches for bilge pump, blower, horn, lights & accessories; hour meter & depth sounder Electric horn Clarion Stereo CD/Sirius satellite w/4 speakers Glove box Hinged ski locker Ski tow ring Stainless steel bow eye & stern eyes 6" cleats

Walk-thru curved full glass windshield Unitized fiberglass deck/floor Snap-in carpet Bow seats w/hinged bow backrest w/storage Courtesy lights Stainless steel passenger grab handles SL Seating: SuspensionAire adjustable bucket seats w/flip-up bolsters/aft bench seat/sunlounge Molded swim platform Merc/Volvo prop Tilt steering Telescopic 3-step boarding ladder

Options

Color-coordinated Sunbrella® soft top & boot w/concealed storage
Color-coordinated Canvas Package: bow cover, walk-thru curtain, side curtains & stern curtain
Color-coordinated Bimini top w/boot
Color-coordinated cockpit cover
Color-coordinated bow cover
Mooring cover
Extended swim platform

Captain's Call (electric) w/Corsa
Quick & Quiet II
Stereo remote for dash
U-shaped cockpit seating w/filler
cushions
High altitude prop
SS Upgrade Package: SS rubrail,
docking lights, pull-up cleats,
transom-mounted stereo remote &
tilt/trim switch

Color Choices

Beige/Laguna Blue Beige/Cranberry Red Beige/Jet Black Beige/Radiant Yellow

GLASTRON 2005

Engine Choices

4,3L MerCruiser (190)	4.3 GL Volvo Penta (190)
4.3L MPI MerCruiser (220)	4.3 GXi Volvo Penta (225)
4.3L MPI Bravo III MerCruise	er (220) 4.3 GXi DP Volvo Penta (225)
5.0L MerCruiser (220)	5.0 GL Volvo Penta (220)
5.0L MPI MerCruiser (260)	5.0 GXi Volvo Penta (270)
5.7L MerCruiser (250)	5.7 Gi Volvo Penta (280)
5.7L Bravo III MerCruiser (25	50)
350 Mag MPI Alpha MerCru	iser (300)

Performance

Engine: 4.3L MerC	ruiser, Prop: 14¼ x 2	21	
RPM	MPH	GPH	RANGE*
2400	15	3.0	158
3200	25	4.0	197
3700	35	7.9	140
WOT	46-48	_	_
0-20 MPH Accelerat	ion: 3.3 sec.		
•	vo Penta, Prop: 14¼		DANCES
RPM	MPH	GPH	RANGE*

Engine: 4.3 GL Volv	vo Penta, Prop: 14¼	x 21	
RPM	MPH	GPH	RANGE*
2000	15	2.8	167
3000	25	3.8	207
4000	35	6.9	160
WOT	45-47	_	_
0-20 MPH Accelerati	ion: 3.4 sec.		

0 20 1111 1111 16661614616			
Engine: 5.7L MerCru	iser, Prop: 14¼ x 2	! 1	
RPM	MPH	GPH	RANGE*
2200	15	3.3	143
2800	25	4.3	183
3500	35	8.0	138
WOT	52-54	_	_
0-20 MPH Acceleration	n: 3.1 sec.		

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Boat		\$
Motor	_H.P.	
Trailer		
Accessories		pare the second
T, T & L		, marie 1
	TOTAL PRICE	E \$

GX 205 Wakeboard Edition



Specifications

LOA 19¹ 11" (6.07 m.)
Beam 96" (2.44 m.)
Depth 45¾" (1.16 m.)
Maximum Depth 56¾" (1.44 m.)
Cockpit Depth 32" (.81 m.)
Approx. Wt. 3250 lbs. (1475 kg.)
w/5.0 GL Volvo Penta®

Transom Deadrise 21°
Transom Width 92" (2.34 m.)
LOA on Trailer 24' 9" (7.54 m.)
Fuel Capacity 35 gal. (132 L.)
Maximum Load 1475 lbs. (669 kg.)
Max. Persons 10 or 1475 lbs. (669 kg.)
NMMA Certified

Draft: A. Drive Unit Up 16½" (.42 m.) **B. Drive Unit Down** 31½" (.80 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter & engine temperature gauges; plus switches for bilge pump, blower, horn, lights & accessories; hour meter & depth sounder Electric horn Clarion stereo CD/Sirius satellite w/4 speakers Glove box Hinged ski locker Ski tow ring Stainless steel bow eye & stern eyes 6" cleats Courtesy lights Unitized fiberglass deck/floor

Snap-in carpet Bow seats w/hinged bow backrest w/storage Walk-thru curved full glass windshield Automatic bilge pump & blower Stainless steel passenger grab handles Molded swim platform SL Seating: SuspensionAire adjustable bucket w/flip-up bolsters/aft bench seat/sunlounge Merc/Volvo prop Tilt steering Telescopic 3-step boarding ladder Automatic bilge pump Custom wakeboard tower

Options

Color-coordinated cockpit cover Color-coordinated bow cover High altitude prop Extended swim platform Stereo remote for dash Captain's Call (electric) w/Corsa Quick & Quiet II U-shaped cockpit seating w/filler cushions

SS Upgrade Package: SS rubrail, docking lights, pull-up cleats, transom-mounted stereo remote & tilt/trim switch

Color Choices

Beige/Laguna Blue Beige/Cranberry Red Beige/Jet Black Beige/Radiant Yellow

GLASTRON 2005

Engine Choices

4.3 L Volvo Penta (190)
4.3 L MPI MerCruiser (220)
4.3 L MPI Bravo III MerCruiser (220)
5.0 L MPI MerCruiser (260)
5.7 L MerCruiser (250)
5.7 L Bravo III MerCruiser (250)
5.7 L Bravo III MerCruiser (250)

350 Mag MPI Alpha MerCruiser (300)

5.0 MPI MerCruise	r, Prop: 14¼ x 21		
RPM	MPH	GPH	RANGE*
2000	10	4.0	79
3000	28	7.5	118
4000	41	12.1	107
WOT	50-53		
0-20 MPH Accelerat	tion: 3.5 sec.		
	~ 444 65		

5.7 Gi Volvo Penta,	Prop: 14¼ x 21		
RPM	MPH	GPH	RANGE*
2000	15	4.1	115
3000	30	7.2	131
4000	42	12.6	105
WOT	53-56	_	_
0-20 MPH Accelerati	ion: 2.8 sec.		

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat		\$
Motor	_H.P.	
Trailer		
Accessories		
T, T & L		
	TOTAL PRICE	: \$

Specifications

LOA 23' (7.01 m.)
Beam 102" (2.59 m.)
Depth 53" (1.35 m.)
Maximum Depth 65" (1.65 m.)
Cockpit Depth 37" (.94 m.)
Approx. Wt. 3800 lbs. (1724 kg.)
w/5.7L MerCruiser®

Transom Deadrise 21°
Transom Width 98" (2.49 m.)
LOA on Trailer 25' 10" (7.87 m.)
Fuel Capacity 47 gal. (178 L.)
Maximum Load 1650 lbs. (748 kg.)
Max Persons 12 or 1650 lbs. (748 kg.)
NMMA Certified

Draft: A. Drive Unit Up 17½" (.44 m.) B. Drive Unit Down 33" (.84 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges, plus switches for bilge pump, blower, navigation/anchor lights, panel lights, interior lights and horn; hour meter and depth sounder Courtesy lights Electric horn Navigation lighting Clarion Stereo CD/Sirius satellite w/4 speakers Glove box Hinged ski locker Ski tow ring 6" cleats Snap-in carpet

Unitized fiberglass deck/floor Molded extended swim platform Walk-thru curved full glass windshield Bow seats w/hinged bow backrest w/storage Automatic bilge pump & blower Stainless steel telescopic 3-step boarding ladder Stainless steel bow eye & stern eyes Merc/Volvo prop Tilt steering SuspensionAire adjustable bucket seats w/flip-up bolsters; U-shaped cockpit seating w/filler cushions; table & sunlounge Flip-up transom walk-thru gate

Options

Color-coordinated Sunbrella® soft top & boot w/concealed storage
Color-coordinated Canvas Package: bow cover, walk-thru curtain, side curtains & stern curtain
Color-coordinated Bimini top w/boot
Color-coordinated cockpit cover
Color-coordinated bow cover
Mooring cover
Bow filler cushions

High altitude prop
Captain's Call (electric) w/Corsa
Quick & Quiet II
Docking lights
SS Upgrade Package: SS rubrail,
docking lights, pull-up cleats,
transom-mounted stereo remote &
tilt/trim switch

Color Choices

Beige/Laguna Blue Beige/Cranberry Red Beige/Jet Black Beige/Radiant Yellow

Stereo remote for dash

Engine Choices

5.0L MPI MerCruiser (260)
5.7L MerCruiser (250)
5.7L Bravo III MerCruiser (250)
350 Mag Bravo III MerCruiser (250)
350 Mag MPI Bravo III MerCruiser (300)
MX 6.2 MPI Bravo I MerCruiser (320)
MX 6.2 MPI Bravo III MerCruiser (320)

5.0 GXi Volvo Penta (270) 5.7 Gi Volvo Penta (280) 5.7 Gi DP Volvo Penta (280) 5.7 GXi Volvo Penta (315) 5.7 GXi DP Volvo Penta (315)

Performance

Engine: 350 Magnum	MPI Bravo I MerC	ruiser, Prop: 14 x	19 Vengeance
RPM	MPH	GPH	RANGE*
3000	28	7.3	162
4000	40	12.1	140
	49-52		
WOT		•	
0-20 MPH Acceleration	: N/A		

 Engine: 350 Magnum MPI Bravo III MerCruiser, Prop: 26 uncupped

 RPM
 MPH
 CPH
 RANGE*

 2500
 25
 6.5
 163

 3500
 37
 10.0
 157

 WOT
 50-53
 —
 —

0-20 MPH Acceleration: N/A

Engine: 5.7 Gi DP \			
RPM	MPH	GPH	RANGE*
2000	11	4.1	112
3000	31	7.3	180
4000	44	12.4	150
WOT	53-56	_	_
0-22 MPH Acceleration	on: 3.3 sec.		

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Boat	·	\$
Motor	H.P.	
Trailer		
Accessories		
T, T & L		
	TOTAL PRIC	E \$

Specifications

LOA 25' (7.62 m.)
Beam 102" (2.59 m.)
Depth 57½" (1.46 m.)
Maximum Depth 69½" (1.77 m.)
Cockpit Depth 37" (.94 m.)
Approx. Wt. 4600 lbs. (2087 kg.)
w/5.7L MerCruiser®

Transom Deadrise 21°
Transom Width 98" (2.49 m.)
LOA on Trailer 26' 5" (8.05 m.)
Fuel Capacity 56 gal. (212 L.)
Maximum Load 2000 lbs. (907 kg.)
Max Persons 12 or 1800 lbs. (816 kg.)
NMMA Certified

Draft: A. Drive Unit Up 18½" (.47 m.)

B. Drive Unit Down 34" (.86 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, navigation/anchor lights, panel lights, interior lights and horn; hour meter and depth sounder Courtesy lights Electric horn Navigation lighting Clarion Stereo CD/Sirius satellite w/4 speakers Hinged ski locker Ski tow ring 6" cleats Snap-in carpet Unitized fiberglass deck/floor

Molded extended swim platform Walk-thru curved full glass windshield Bow seats w/hinged bow backrest w/storage Automatic bilge pump & blower Stainless steel telescopic 3-step fore & aft boarding ladders Stainless steel bow eye & stern eyes Merc/Volvo prop Tilt steering Enclosed head w/porta-pottie SuspensionAire adjustable bucket seats w/flip-up bolsters; U-shaped cockpit seating w/filler cushions; table & sunlounge Flip-up transom walk-thru gate

Options

Color-coordinated Sunbrella® soft top & boot w/concealed storage
Color-coordinated Canvas Package: bow cover, walk-thru curtain, side curtains & stern curtain
Color-coordinated Bimini top w/boot Color-coordinated cockpit cover
Color-coordinated bow cover
Mooring cover
Docking lights

High altitude prop
Captain's Call (electric) w/Corsa
Quick & Quiet II
Wet bar
Bow filler cushions
SS Upgrade Package: SS rubrail,
docking lights, pull-up cleats,
transom-mounted stereo remote &
tilt/trim switch

Color Choices

Beige/Laguna Blue Beige/Cranberry Red Beige/Jet Black Beige/Radiant Yellow

Stereo remote for dash

Engine Choices

5.7L MerCruiser (250)
5.7L Bravo III MerCruiser (250)
350 Mag MPI Bravo I MerCruiser (300)
350 Mag MPI Bravo III MerCruiser (300)
MX 6.2 MPI Bravo I MerCruiser (320)
MX 6.2 MPI Bravo III MerCruiser (320)
496 Mag MPI Bravo I MerCruiser (375)
496 Mag MPI Bravo III MerCruiser (375)

5.0 GXi Volvo Penta (270) 5.7 Gi Volvo Penta (280) 5.7 Gi DP Volvo Penta (280) 5.7 GXi Volvo Penta (315) 5.7 GXi DP Volvo Penta (315) 8.1 Gi DP Volvo Penta (375)

Performance

Engine: 496 Mag MPI Bravo I MerCruiser, Prop: 14¼ x 21 Mirage Plus				
RPM	MPH	GPH	RANGE*	
2000	12	6.1	99	
3000	33	10.9	152	
4000	47	18.2	130	
WOT	58-61	_		
0-20 MPH Accelerati	on: 4.9 sec.			

Engine: 496 Magnu	m MPI Bravo III Me	rCruiser, Prop: 2	uiser, Prop: 28 uncupped	
RPM	MPH	GPH	RANGE*	
2000	15	6.2	123	
3000	33	10.5	157	
4000	47	18.0	131	
WOT	57-60	_	_	
0-20 MPH Acceleration	on: 3.4 sec.			

Engine: 8.1 Gi Volvo Penta, Prop: F6 Duoprop			
RPM	MPH	GPH	RANGE ²
2000	20	5.7	177
3000	35	11.1	160
4000	49	19.3	128
WOT	58-61	_	_
0-20 MPH Accelerat	ion: 3.0 sec.		

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Boat		\$
Motor	H.P.	
Trailer		,
Accessories		
T, T & L		
	TOTAL PRICE	E \$



Specifications

LOA 18' (5.49 m.)
Beam 91" (2.31 m.)
Depth 43" (1.09 m.)
Maximum Depth 53" (1.35 m.)
Cockpit Depth 29½" (.75 m.)
Approx. Wt. 1720 lbs. (780 kg.)
w/o engine
Transom Width 86" (2.18 m.)

Transom Deadrise 21°
LOA on Trailer 22' 2" (6.76 m.)
Fuel Capacity 29 gal. (110 L.)
Maximum Load 1880 lbs. (853 kg.)
Max. Persons 8 or 1225 lbs. (556 kg.)
Max. Horsepower 150 (112 kw.)
NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.)

B. Drive Unit Down 29" (.74 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, fuel and trim gauges; plus switches for bilge pump, horn, navigation/anchor lights, panel lights and accessories Bow panel includes: aerator switch, voltmeter, tilt switch, battery charger switch, battery selector switch, trolling motor plug Clarion Stereo CD/Sirius satellite w/2 speakers Electric horn Navigation lighting Hinged ski locker Tilt steering 6" cleats Stainless steel bow eye & stern eyes Walk-thru curved open glass windshield Bilge pump

Unitized fiberalass deck/floor Snap-in carpet Courtesy lights Reversible bow seats/fishing deck Wraparound bow seats w/hinged bow backrest w/storage SuspensionAire adjustable bucket seats w/flip-up bolsters/2 removable fishing seats/aft bench seating Stainless steel passenger grab handles Molded swim platform Telescopic 3-step boarding ladder Bow storage compartments Glove box Aerated livewell Trolling motor mount Rod holders Tackle box trays Dual cable steering

Options

Color-coordinated Sunbrella® soft top & boot w/concealed storage
Color-coordinated Canvas Package: bow cover, walk-thru curtain, side curtains & stern curtain
Color-coordinated Bimini top w/boot Color-coordinated cockpit cover
Color-coordinated bow cover
Mooring cover

Stereo remote for dash Ski tow pylon Fishing Package: trolling motor, fish finder Convenience Package: hour meter, depth sounder, automatic bilge pump Full side glass windshield

Color Choices

Beige/Laguna Blue Beige/Cranberry Red Beige/Jet Black Beige/Radiant Yellow

Engine Choices

johnson 115 PLSO	Evinrude 115 FPLSO
Johnson 115 PL4SO	Evinrude 135 FPLSO
Johnson 150 PLSO	Evinrude 150 FPLSO
Yamaha 115 TLRD	Mercury 115 ELPTO
Yamaha F 115 TLRD	Mercury 125 ELPTO
Yamaha 150 TLRD	Mercury 135 L Optimax
Yamaha F 150 TLRD	Mercury 150 L XR6
	Mercury 150 L EFI
	Mercury 150 L Optimax

Performance

つつつつつつつつ

Engine: 115 Johnson, Prop: 14 x 17				
RPM	MPH	GPH	RANGE*	
2500	15	3.6	109	
3300	25	4.6	142	
4700	35	7.2	127	
WOT	42-44	_	_	
0-20 MPH Accelerati	on: 3.2 sec			

Engine: 135 L Optimax Mercury (V6), Prop: 141/4 x 21				
RPM	MPH	` GPH	RANGE*	
2400	15	4.2	93	
3000	25	5.1	128	
4000	35	7.1	129	
WOT	46-49	_	_	
0-20 MPH Accelerati	ion: 3.1 sec.			

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above,

and based on 90 percent of boat's fuel capacity.

Sale Price

Boat		\$
Motor	_H.P.	
Trailer		
Accessories		
T, T & L		
	TOTAL PRICE	\$

50

VEG

Specifications

LOA 18' (5.49 m.)
Beam 91" (2.31 m.)
Depth 43" (1.09 m.)
Maximum Depth 53" (1.35 m.)
Cockpit Depth 29½" (.75 m.)
Approx. Wt. 2760 lbs. (1252 kg.)
w/4.3 GL Volvo Penta®

Transom Deadrise 21°
Transom Width 86" (2.18 m.)
LOA on Trailer 22' 4" (6.81 m.)
Fuel Capacity 29 gal. (110 L.)
Maximum Load 1200 lbs. (544 kg.)
Max. Persons 8 or 1200 lbs. (544 kg.)
NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.) **B. Drive Unit Down** 31" (.79 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights and accessories Bow panel includes: aerator switch, voltmeter, tilt switch, battery charger switch, battery selector switch, trolling motor plug Electric horn Navigation lighting Clarion Stereo CD/Sirius satellite w/4 speakers Glove box Hinged ski locker Ski tow ring 6" cleats Walk-thru curved windshield Courtesy lights Unitized fiberglass deck/floor Reversible bow seats/fishing deck

Bow seats w/hinged bow backrest w/storage SuspensionAire adjustable bucket seats w/flip-up bolsters/2 removable fishing seats/aft bench seating Bow storage compartments Stainless steel passenger grab handles Molded swim platform Tilt steering Convertible stern sundeck/fishing platform Bilge pump & blower Aerated livewell Trolling motor mount Rod holders Tackle box trays Merc/Volvo prop Telescopic 3-step boarding ladder Snap-in carpet

Options

Color-coordinated Sunbrella® soft top & boot w/concealed storage Color-coordinated Canvas Package: bow cover, walk-thru curtain, side curtains & stern curtain Color-coordinated Bimini top w/boot Color-coordinated cockpit cover Color-coordinated bow cover Mooring cover

Convenience Package: hour meter, depth sounder, automatic bilge pump Fishing Package: trolling motor, fish finder High altitude prop Extended swim platform Stereo remote for dash Full side glass windshield

Color Choices

Beige/Laguna Blue Beige/Cranberry Red Beige/Jet Black Beige/Radiant Yellow

Engine Choices

 3.0L MerCruiser (WPS) (135)
 3.0 GL Volvo Penta (WPS) (135)

 4.3L MerCruiser (190)
 4.3 GL Volvo Penta (190)

 4.3L MPI MerCruiser (220)
 4.3 GXi Volvo Penta (225)

Performance

ngine: 3.0L MerCruiser, Prop: 14½ x 19				
RPM	MPH	GPH	RANGE*	
2100	15	2.5	157	
2900	25	3.5	186	
3500	35	7.4	123	
WOT	42-44	_	_	
0-20 MPH Accelerati	ion: 3.4 sec.			

Engine: 3.0 GL Vol	vo Penta, Prop: 14½	x 19	
RPM	MPH	GPH	RANGE*
2000	10	2.1	124
3000	20	3.2	163
4000	35	7.6	120
WOT	41-43	_	_
0-20 MPH Accelerat	ion: 3.7 sec.		

MPH		RANGE ⁴
15	3.0	131
25	4.0	163
35	7.9	116
48-50		
		25 4.0 35 7.9 48-50 —

O-20 MPH Acceleration: 3.2 sec.

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat		\$
Motor	H.P.	
Trailer		
Accessories		
T, T & L		
	TOTAL PRI	CE \$

VEG

Specifications

LOA 19' 11" (6.07 m.)
Beam 96" (2.44 m.)
Depth 45%" (1.16 m.)
Maximum Depth 56%" (1.44 m.)
Cockpit Depth 32" (.81 m.)
Approx. Wt. 3095 lbs. (1404 kg.)
w/5.0 GL Volvo Penta®

Transom Deadrise 21°
Transom Width 92" (2.34 m.)
LOA on Trailer 24' 9" (7.54 m.)
Fuel Capacity 35 gal. (132 L.)
Maximum Load 1475 lbs. (669 kg.)
Max. Persons 10 or 1475 lbs. (669 kg.)
NMMA Certified

Draft: A. Drive Unit Up 16½" (.42 m.) **B. Drive Unit Down** 31½" (.80 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights and accessories Bow panel includes: aerator switch, voltmeter, tilt switch, battery charger switch, battery selector switch, trolling motor plug Electric horn Navigation lighting Clarion Stereo CD/Sirius satellite w/4 speakers Glove box Hinged ski locker Ski tow ring Stainless steel bow eye & stern eyes 6" cleats Walk-thru curved open glass windshield Bilge pump & blower

Unitized fiberglass deck/floor Fiberglass floor (bow & cockpit) Snap-in carpet Reversible bow seats/fishing deck Bow seats w/hinged bow backrest w/storage SuspensionAire adjustable bucket seats w/flip-up bolsters/2 removable fishing seats/aft bench seating Bow storage compartments Stainless steel passenger grab rails Molded swim platform Convertible stern sundeck/fishing platform Aerated livewell Trolling motor mount Rod holders Tackle box trays Merc/Volvo prop Telescopic 3-step boarding ladder Courtesy lights Tilt steering

Options

Color-coordinated Sunbrella® soft top & boot w/concealed storage
Color-coordinated Canvas Package: bow cover, walk-thru curtain, side curtains & stern curtain
Color-coordinated Bimini top w/boot Color-coordinated cockpit cover Color-coordinated bow cover Mooring cover

High altitude prop
Fishing Package: trolling motor,
fish finder
Convenience Package: hour
meter, depth sounder, automatic
bilge pump
Stereo remote for dash
Extended swim platform
Full side glass windshield

Color Choices

Beige/Laguna Blue Beige/Cranberry Red Beige/Jet Black Beige/Radiant Yellow

Engine Choices

4.3L MerCruiser (190)
4.3L MPI MerCruiser (220)
4.3L MPI Bravo III MerCruiser (220)
5.0L MPI MerCruiser (220)
5.0L MPI MerCruiser (260)
5.7L MerCruiser (250)
5.7L Bravo III MerCruiser (250)
5.7L Bravo III MerCruiser (250)
350 Mag MPI Alpha MerCruiser (300)

Performance

ingine: 4.3L MerCri	uiser, Prop: 14½ x 1	9	
RPM	MPH	GPH	RANGE*
2400	15	3.0	158
3200	25	4.0	197
3700	35	7.9	140
WOT	45-47	summer.	_
0-20 MPH Acceleration	on: 3.3 sec.		

Engine: 4.3 GL Vol	vo Penta, Prop: 14½	x 19	
RPIM	MPH	GPH	RANGE
2000	15	2.8	169
3000	25	3.8	207
4000	35	6.9	160
WOT	44-46	_	_
0-20 MPH Accelerat	ion: 3.4 sec.		

MPH	GPH	DAMET+
	0111	RANGE*
15	3.3	143
25	4.3	183
35	8.0	138
52-54	_	_
	25 35	25 4.3 35 8.0 52-54 —

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat		\$
Motor	_H.P.	
Trailer		
Accessories		
T, T & L		
	TOTAL PRICE	\$

DX 205

Specifications

LOA 20' 1" (6.12 m.)

Beam 102" (2.59 m.)

Depth 50½" (1.28 m.)

Maximum Depth 59" (1.50 m.)

Cockpit Depth 35" (.89 m.)

Approx. Wt. 2900 lbs. (1315 kg.)

w/4.3L MerCruiser®

Transom Deadrise 17°
Transom Width 94" (2.39 m.)
LOA on Trailer 25' 3" (7.70 m.)
Fuel Capacity 50 gal. (189 l.)
Maximum Load 1400 lbs. (635 kg.)
Max. Persons 10 or 1400 lbs. (635 kg.)
NMMA Certified

Draft: A. Drive Unit Up 13" (.33 m.) B. Drive Unit Down 28" (.71 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights and accessories Electric horn Automatic bilge pump Navigation lighting Clarion Stereo CD/Sirius satellite w/2 speakers Ski/kneeboard locker Ski tow ring Fiberglass floor Carry-on cooler Sunbrella® Bimini top w/boot Wrap-around bow seats Snap-in carpet Stainless steel bow eye & stern eyes Windscreen Bow storage compartments Passenger grabrails Single fishing seat for aft casting deck 6" cleats Molded swim platform Stainless steel boarding ladder Merc/Volvo prop Courtesy lights Aerated livewell Trolling motor plug SuspensionAire adjustable bucket seats w/flip-up bolsters Walk-thru transom w/gate Convenience Package: hour meter, depth sounder Tilt steering Removable padded sunlounge

Options

Cockpit cover High altitude prop Bow table w/floor mount Forward fishing seat & pedestal Gelcoat hull stripe

Color Choices

White w/Blue Graphics White w/Red Graphics White w/Black Graphics

GLASTRON 2005

Engine Choices

 4.3L MerCruiser (190)
 4.3 GL Volvo Penta (190)

 4.3L MPI MerCruiser (220)
 4.3 GXi Volvo Penta (225)

 5.0L MerCruiser (220)
 5.0 GL Volvo Penta (220)

 5.0L MPI MerCruiser (260)
 5.0 GXi Volvo Penta (270)

Performance

Engine: 4.3 GL Volvo Penta, Prop: 141/4 x 21

RPM	MPH	GPH	RANGE*
2500	21	4.8	197
3500	35	8.2	192
4500	41	14.8	125
	47-50		_
WOT	47-30		

0-20 MPH Acceleration: N/A

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Boat		\$
Motor	H.P.	
Trailer		
Accessories		
T, T & L		
	TOTAL DDIC	r ¢

DS 215

Specifications

LOA 20" 11" (6.38 m.)

Beam 102" (2.59 m.)

Depth 57½" (1.46 m.)

Maximum Depth N/A

Cockpit Depth 28½" (.72 m.)

Approx. Wt. 3600 lbs. (1633 kg.)

W/5.0L MPI MerCruiser®

Transom Deadrise 16°
Transom Width 96" (2.44 m.)
LOA on Trailer 23' 9" (7.24 m.)
Fuel Capacity 56 gal. (212 L.)
Maximum Load 1900 lbs. (862 kg.)
Max. Persons 13 or 1950 lbs. (885 kg.)
NMMA Certified

Draft: A. Drive Unit Up 14" (.36 m.) B. Drive Unit Down 30" (.76 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter & engine temperature gauges Dockside boarding gate Bow anchor locker Stainless steel ski tow ring Clarion stereo CD/Sirius satellite w/4 speakers Electric horn 6" cleats Fiberglass floor Snap-in carpet Tilt steering Stainless steel bow eye & stern eyes Stainless steel grabrails Courtesy lights Navigation lighting Wraparound bow seats

Enclosed head Windscreen Entertainment console w/sink, electric water pump (12.5 gal.) & removable cooler Ski locker SuspensionAire adjustable bucket seats w/flip-up bolster Merc/Volvo prop Fore & aft swim platforms w/concealed ladders Bow storage compartments Color-coordinated Sunbrella® Bimini top w/boot Walk-thru transom Convenience Package: hour meter & depth sounder Automatic bilge pump

Options

Color-coordinated cockpit cover Docking lights Compass Table w/bow & aft floor mounts Gelcoat hull stripe Porta-pottie

Extended swim platform

Bow filler cushions High altitude prop Fishing Package: livewell w/switch at dash, 2 bow fishing seats & bow trolling motor plug

Color Choices

White w/Blue Graphics White w/Red Graphics White w/Black Graphics

Engine Choices

4.3L MerCruiser (190)

4.3L MPI MerCruiser (220) 4.3L MPI Bravo III MerCruiser (220)

5.0L MerCruiser (220)

5.0L MPI MerCruiser (260) 5.7L MerCruiser (250)

5.7L Bravo III MerCruiser (250)

350 Mag MPI Alpha MerCruiser (300)

4.3 GL Volvo Penta (190)

GLASTRON 2005

4.3 GXi Volvo Penta (225)

4.3 GXi DP Volvo Penta (225)

5.0 GL Volvo Penta (220)

5.0 GXi Volvo Penta (270)

5.7 Gi Volvo Penta (280)

Performance

Engine:	5.0	MPI	MerCruiser,	Prop:	14½ x 19
---------	-----	-----	-------------	-------	----------

MPH	GPH	RANGE
10	N/A	N/A
31	N/A	N/A
42	N/A	N/A
48-51	N/A	N/A
	10 31 42	10 N/A 31 N/A 42 N/A

0-20 MPH Acceleration: 4.3 sec.

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude and other conditions.

Sale Price

أدس

Boat	\$
MotorH.P.	
Trailer	
Accessories	
T, T & L	

TOTAL PRICE \$_____

DX 235

Specifications

LOA 22' 6" (6.86 m.)

Beam 102" (2.59 m.)

Depth 60" (1.52 m.)

Maximum Depth 69" (1.75 m.)

Cockpit Depth 31" (.79 m.)

Approx. Wt. 4000 lbs. (1814 kg.)

W/5.0 GL Volvo Penta®

Transom Deadrise 15°
Transom Width 94" (2.39 m.)
LOA on Trailer 30' 6" (9.30 m.)
Fuel Capacity 73 gal. (276 L.)
Maximum Load 1950 lbs. (885 kg.)
Max. Persons 13 or 1950 lbs. (885 kg.)
NMMA Certified

Draft: A. Drive Unit Up 18" (.46 m.) B. Drive Unit Down 32" (.81 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges Courtesy lights Electric horn Navigation lighting Clarion Stereo CD/Sirius satellite w/4 speakers Ski locker Ski tow ring 6" cleats Automatic bilge pump & blower Sunbrella® Bimini top w/boot Removable cooler Walk-thru transom w/gate Snap-in carpet

Walk-thru curved full glass windshield Wraparound bow seats w/storage Fore & aft swim platforms w/concealed ladders Stainless steel bow eye & stern eyes Anchor locker Stainless steel grab handles Enclosed head & sink SuspensionAire adjustable bucket seats w/flip-up bolster Table w/bow & aft floor mounts Dockside boarding gate Tilt steering Merc/Volvo prop Fiberglass floor Convenience Package: hour meter & depth sounder

Options

Bow/cockpit cover Docking lights Pump-out head Compass High altitude prop Bow filler cushions Extended swim platform Transom shower Porta-pottie Gelcoat hull stripe

Color Choices

White w/Blue Graphics White w/Red Graphics

White w/Black Graphics

GLASTRON 2005

Engine Choices

5.0 L MerCruiser (220)
5.0 L MPI MerCruiser (260)
5.7 L MerCruiser (250)
5.7 L Bravo III MerCruiser (250)
350 Mag MPI Alpha MerCruiser (300)
350 Mag MPI Bravo III MerCruiser (300)

Performance

RPM 2000 21 3000 4000 42 WOT 47-49	N/A N/A N/A	N/A N/A N/A
------------------------------------	-------------------	-------------------

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

		*
Boat		\$
Motor	H.P.	
Trailer		
Accessories		
T, T & L		
	TOTAL I	PRICE \$

Specifications

LOA 20' 2" (6.15 m.)

Beam 94¼" (2.39 m.)

Depth 50" (1.27 m.)

Maximum Depth 71" (1.80 m.)

Cockpit Depth 35" (.89 m.)

Approx, Wt. 2852 lbs. (1294 kg.)

w/5.0 GL Volvo Penta®

Transom Deadrise 21°
Transom Width 90" (2.29 m.)
LOA on Trailer 24' 8" (7.52 m.)
Fuel Capacity 45 gal. (170 l.)
Maximum Load 1450 lbs. (658 kg.)
Max. Persons 8 or 1150 lbs. (522 kg.)
NMMA Certified

Draft: A. Drive Unit Up 18½" (.47 m.) B. Drive Unit Down 33^m (.84 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter & engine temperature gauges; plus switches for bilge pump, blower, horn, lights & accessories Electric horn Automatic bilge pump Blower Navigation lighting Clarion stereo CD/Sirius satellite w/4 speakers Floor storage area Ski tow ring Stainless steel bow eye & stern eyes 6" cleats Tilt steering Sunbrella® soft top & boot w/concealed storage

Convenience Package: hour meter, depth sounder Cuddy cabin includes: upholstered V-berth, lounge seat, cabin courtesy light, deck hatch w/screen & lockable door BS Seating: SuspensionAire adjustable bucket seat w/flip-up bolsters/port sleeper/aft jump seats Molded swim platform Helm storage locker Merc/Volvo prop Bow access step Bow anchor locker Passenger grab handles Walk-thru curved full glass windshield Telescopic 3-step boarding ladder Stainless steel bow rails

Options

Canvas Package: side curtains, stern curtain Camper Canvas Package: includes Canvas Package less stern curtain, plus aft camper top, aft camper side curtains & aft camper stern curtain Cockpit cover Mooring cover High altitude prop Blue gelcoat hull stripe
Galley Package: alcohol stove, ice
box, sink, water system, dual helm
seat & aft jump seats
SL Seating: SuspensionAire
adjustable bucket seat w/flip-up
bolsters/aft bench seat/sunlounge
(Galley Package not available in this
seating option)
Porta-pottie

Color Choices

White w/Blue Graphics

Engine Choices

4.3L MerCruiser (190) 4.3L MPI MerCruiser (220) 4.3L MPI Bravo III MerCruiser (220) 5.0L MerCruiser (220) 5.0L MPI MerCruiser (260)	4.3 GL Volvo Penta (190) 4.3 GXi Volvo Penta (225) 4.3 GXi DP Volvo Penta (225) 5.0 GL Volvo Penta (220) 5.0 GXi Volvo Penta (270)

Performance

Engine: 4.3L MerCri	2411574		
RPM	MPH	GPH	RANGE*
2400	15	4.2	145
3200	25	5.5	205
3700	35	8.6	165
WOT	44-46	_	_
0-20 MPH Accelerati	on: 3.5 sec.		

Engine: 4.3 GL Volve			
RPM	MPH	GPH	RANGE*
2000	15	4.0	152
	25	5.3	191
3000	35	9.0	158
4000	55	7.0	
WOT	43-45		
0-20 MPH Acceleration	on: 3.6 sec.		

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat		\$
Motor	H.P.	
Trailer		
Accessories		
T, T & L		
	TOTAL	PRICE \$

Specifications

LOA 21' 6" (6.55 m.)

Beam 102" (2.59 m.)

Depth 62" (1.57 m.)

Maximum Depth 72" (1.83 m.)

Cockpit Depth 34" (.86 m.)

Approx. Wt. 3600 lbs. (1633 kg.)

w/5.0 GXi Volvo Penta®

Transom Deadrise 21°
Transom Width 96" (2.44 m.)
LOA on Trailer 26' 4" (8.03 m.)
Fuel Capacity 56 gal. (212 L.)
Maximum Load 1950 lbs. (885 kg.)
Max. Persons 10 or 1475 lbs. (669 kg.)
NMMA Certified

Draft: A. Drive Unit Up 18" (.46 m.)

B. Drive Unit Down 36" (.91 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter & engine temperature gauges; plus switches for bilge pump, blower, lights & horn; hour meter & depth sounder Horn Porta-pottie Blower Navigation lighting Hour meter Clarion stereo CD/Sirius satellite w/4 speakers Stainless steel bow rails Stainless steel bow eye & stern eyes 6" cleats Ski tow ring

BS Seating: SuspensionAire adjustable bucket seat w/flip-up bolsters/port sleeper/aft jump seats Molded swim platform Stainless steel telescopic 3-step boarding ladder Sunbrella® Bimini top & boot Merc/Volvo prop Tilt steering Floor storage area Walk-thru curved full glass windshield Carry-on ice chest Bow anchor locker 12V power plug Stereo remote for dash Snap-in carpet Fiberglass floor Battery switch Automatic bilge pump

Options

Galley Package: stainless steel sink, 5-gal. water system, butane stove Camper Canvas Package: includes Canvas Package less stern curtain, plus aft camper top & aft camper side curtains & aft camper stern curtain

Cuddy cabin includes: upholstered

V-berth, cabin courtesy light, deck hatch & bi-fold lockable door

Canvas Package for Bimini top: side curtains, aft curtain & clear connector Cockpit cover Mooring cover
Spot light
High altitude prop
Compass
Blue gelcoat hull stripe
SL Seating: SuspensionAire
adjustable bucket seats w/flip-up
bolsters/aft bench seat/sunlounge
(Galley Package not available in this
seating option)

Color Choices

White w/Blue Graphics

Engine Choices

4.3 L Volvo Penta (190)
5.0 L MerCruiser (220)
5.0 L MPI MerCruiser (260)
5.7 L MerCruiser (250)
5.7 L Bravo III MerCruiser (250)
350 Mag MPI Alpha MerCruiser (300)
350 Mag MPI Bravo I MerCruiser (300)

Performance

Engine: 5.0 GXi Volvo Penta, Prop: 14½ x 19				
RPM	MPH	GPH	RANGE	
2000	9	3.9	107	
3000	29	7.3	184	
4000	38	11.4	164	
WOT	48-51	_		
0-20 MPH Accelerati	ion: 3.9 sec.			

Boat	\$
MotorH.P.	
Trailer	
Accessories	
T, T & L	
TOTAL DDICE	E ¢

Specifications

LOA 24' 10" (7.57 m.) Beam 102" (2.59 m.) Depth 80%" (2.04 m.) Maximum Depth 91" (2.31 m.) Cockpit Depth 36" (.91 m.) Approx. Wt. 4437 lbs. (2013 kg.) w/5.0 GL Volvo Penta®

Instrument panel includes:

speedometer, tachometer, trim,

Transom Deadrise 20° Transom Width 97" (2.46 m.) LOA on Trailer 26' 10" (8.18 m.) Fuel Capacity 56 gal. (212 L.) Maximum Load 2240 lbs. (1016 kg.) Max. Persons 10 or 1475 lbs. (669 kg.) **NMMA** Certified

Draft: A. Drive Unit Up 17" (.43 m.) B. Drive Unit Down 35" (.89 m.)

Standard Features

fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, navigation/anchor lights, panel lights, interior lights and horn; hour meter and depth sounder Horn/blower/compass Automatic bilge pump Translucent deck hatch w/screen Clarion Stereo CD/Sirius satellite w/4 speakers Bow pulpit w/roller & bow rope locker Stainless steel rails Stainless steel bow eye & stern eyes Stainless steel cleats Main cabin includes: enclosed head with 4-gallon porta-pottie, fiberglass shower stall, hanging clothes locker, cabin table, cabin courtesy lights, ice box, alcohol stove & on-demand water faucet

Molded swim platform/stainless steel telescopic 3-step boarding ladder Cockpit area includes: SuspensionAire adjustable bucket seat w/flip-up bolster, L-shaped passenger seating w/double-wide fold-out sunlounge, stern storage compartment & walk-thru transom w/gate Walk-thru curved full glass windshield Walkaround deck Dual battery switch Fiberglass floor 18-gallon water tank Sunbrella® Bimini top & boot Merc/Volvo prop Vented cabin windows (2) Tilt steering Transom shower Ski tow ring Remote control spotlight Snap-in carpet

Options

plus aft camper top, aft camper side curtains, aft camper stern curtains Canvas Package for Bimini top: side curtains, aft curtain, clear connector Cockpit cover Electric anchor windlass Manual china head w/pump-out

Camper Canvas Package includes:

Canvas Package less stern curtain,

Starboard windshield wiper High altitude prop Galley Package: microwave oven, 12/110V refrigerator, alcohol/electric stove, hot water heater, 110V dockside power Electric china head 13" flat screen TV w/DVD Blue gelcoat hull stripe

Color Choices

White w/Blue Graphics

Hydraulic trim tabs Dockside air conditioner/reverse heat

Engine Choices

Performance

Engine: 5.0 GXi DP	Volvo Penta, Prop:	F4 Duoprop	
RPM	MPH	GPH	RANGE*
2000	9	N/A	N/A
3000	25	N/A	N/A
4000	35	N/A	N/A
WOT	45-48		_
0-20 MPH Acceleration	on: 3.9 sec.		

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Boat	\$
MotorH	Р.
Trailer	
Accessories	
T, T & L	
	TOTAL PRICE S

Specifications

LOA 26' 11" (8.20 m.) Beam 102" (2.59 m.) Depth 86" (2.18 m.) Maximum Depth 92" (2.34 m.) Cockpit Depth 36" (.91 m.) Approx. Wt. 5850 lbs. (2654 kg.) w/5.7 Gi Volvo Penta® Transom Deadrise 20°

Instrument panel Includes:

Transom Width 97" (2.46 m.) **LOA on Trailer** 30' (9.14 m.) Fuel Capacity 72 gal. (273 L.) Bridge Clearance 79" (2.01 m.) Bridge Clearance w/Arch 106" (2.69 m.) NMMA Certified

Draft: A. Drive Unit Up 19" (.49 m.) B. Drive Unit Down 40" (1.02 m.)

Standard Features

speedometer, tachometer, trim, fuel, oil pressure, voltmeter, engine temperature, hour meter & depth sounder gauges; plus switches for bilge pump, blower, navigation/anchor lights, panel lights, interior lights & horn Electric horn Compass Blower Depth sounder & hour meter Automatic bilge pump Stainless steel bow eye & stern eyes Stainless steel cleats Stainless steel bow rails & grabrails Dual battery switch Fiberglass cockpit floor Walk-thru curved full glass windshield Remote control spotlight Main cabin includes: locker, V-berth cushions w/table & filler cushions, cabin courtesy lights & hot water system Deck hatch w/screen

SeaKey satellite communications system Manual china head w/pump-out Transom shower Battery charger Ski tow ring Hydraulic trim tabs Vented cabin windows (4) Electric anchor windlass Starboard windshield wiper Blue gelcoat hull stripe Radar arch

Options

Canvas Package for Bimini top: side curtains, aft curtain, clear connector Cockpit cover 13" flat screen TV w/DVD Stereo remote Fore deck sun pad High altitude prop

Color Choices

White w/Blue Graphics

Cockpit area includes: wet bar w/sink, ice box & water system, removable stern seat, portside lounge seat, double wide sunlounge helm seat Galley Package: microwave oven, 12/110V refrigerator, alcohol/ electric stove, 110V dockside power, sink & water system 18-gallon water tank Snap-in carpet Sunbrella® Bimini top & boot Merc/Volvo prop Tilt steering Clarion stereo CD/Sirius satellite

Molded swim platform w/stainless steel telescopic 3-step boarding ladder

Grey water system Electric china head Dockside air conditioner/reverse heat Westerbeke 5KW generator

Engine Choices

5.7L MerCruiser (250) 5.7L Bravo III MerCruiser (250) 350 Mag MPI Bravo | MerCruiser (300) 350 Mag MPI Bravo III MerCruiser (300) MX 6.2 MPI Bravo I MerCruiser (320) MX 6.2 MPI Bravo III MerCruiser (320)

5.0 GXi Volvo Penta (270) 5.0 GXi DP Volvo Penta (270) 5.0 OSi DP Volvo Penta (270) 5.7 Gi Volvo Penta (280) 5.7 Gi DP Volvo Penta (280) 5.7 OSi DP Volvo Penta (280) 5.7 GXi Volvo Penta (315) 5.7 GXi DP Volvo Penta (315) 5.7 OSXi DP Volvo Penta (320)

Performance

Engine: 5.7 GXi DP Volvo Penta, Prop: F4 Duoprop			
RPM	MPH	GPH	RANGE
2000	9	4.5	130
3000	23	8.0	187
4000	35	13.3	172
	45-48	_	
WOT	.0 .0		
0-20 MPH Accelerat	ion: 4.0 sec.		

U.S. models of the GS 269 come equipped with a SeaKey™ satellite communications system which includes:

■ Emergency messaging ■ Position monitoring via the Internet Water intrusion monitoring ■ Low voltage monitoring Anti-theft protection **■ 24-hour telephone assistance**

Sale Price

Boat		\$
Motor	_H.P.	
Trailer		
Accessories		
T, T & L		
	TOTAL PRICI	S

Specifications

LOA 27' 5" (8.36 m.) **Beam** 102" (2.59 m.) **Depth** 89" (2.26 m.) Maximum Depth 97" (2.46 m.) Cockpit Depth 36" (.91 m.) Approx. Wt. 6200 lbs. (2812 kg.) w/5.0 GL Volvo Penta® Transom Deadrise 20°

Instrument panel includes:

Transom Width 97" (2.46 m.) LOA on Trailer 30' 6" (9.3 m.) Fuel Capacity 72 gal. (273 L.) Bridge Clearance 84" (2.13 m.) Bridge Clearance w/Arch 106" (2.69 m.) **NMMA** Certified

Draft: A. Drive Unit Up 19" (.49 m.) B. Drive Unit Down 40" (1.02 m.)

Standard Features

speedometer, tachometer, trim, fuel, oil pressure, voltmeter, engine temperature, hour meter and depth sounder gauges; plus switches for bilge pump, blower, navigation/anchor lights, panel lights, interior lights and horn Electric horn Compass Blower Automatic bilge pump Stainless steel bow eye & stern eyes Stainless steel cleats Walkaround deck Walk-thru curved full glass windshield Vented cabin windows (2) Main cabin includes: hanging clothes locker, V-berth cushions w/table & filler cushions, cabin courtesy lights and hot water system Molded swim platform w/stainless steel telescopic 3-step boarding ladder Bow pulpit w/roller & bow rope locker 18-gallon water tank Snap-in carpet

Cockpit area includes: wet bar w/sink, icebox & water system, removable stern seat, portside lounge seat, double wide sunlounge helm seat Galley Package: microwave oven, 12/110V refrigerator, alcohol/ electric stove, 110V dockside power, sink and water system Deck hatch w/screen Sunbrella® Bimini top w/boot Merc/Volvo prop Tilt steering
Clarion Stereo CD/Sirius satellite w/4 speakers SeaKey satellite communications system Manual china head w/pump-out Transom shower Battery charger Dual battery switch Walk-thru transom w/gate Hydraulic trim tabs Fiberglass cockpit floor Ski tow ring Stainless steel bow rail & grabrails Starboard windshield wiper Remote control spotlight Depth sounder & hour meter

Options

Camper Canvas Package includes: Canvas Package less stern curtain, plus aft camper top, aft camper side curtains, aft camper stern curtain Canvas Package for Bimini top: side curtains, aft curtain, clear connector Cockpit cover 13" flat screen TV w/DVD Radar arch High altitude prop

Stainless steel storage rack for docking fenders Extended swim platform Grey water system Westerbeke SKW generator Electric china head Blue gelcoat hull stripe

Color Choices

White w/Blue Graphics

Electric anchor windlass Dockside air conditioner/reverse heat Additional vented cabin windows (2)

Engine Choices

5.7L MerCruiser (250) 5.7L Bravo III MerCruiser (250) 350 Mag MPI Bravo I MerCruiser (300) 350 Mag MPI Bravo III MerCruiser (300) MX 6.2 MPI Bravo I MerCruiser (320) MX 6.2 MPI Bravo III MerCruiser (320)

5.0 GXi Volvo Penta (270) 5.0 GXi DP Volvo Penta (270) 5.0 OSi DP Volvo Penta (270) 5.7 Gi Volvo Penta (280) 5.7 Gi DP Volvo Penta (280) 5.7 OSi DP Volvo Penta (280) 5.7 GXi Volvo Penta (315) 5.7 GXi DP Volvo Penta (315) 5.7 OSXi DP Volvo Penta (320)

Performance

Engine: 5.7 Gi DP V			
RPM	MPH '	ĞPH	RANGE*
2000	9	4.2	142
3000	· 22	8.3	176
4000	35	13.3	171
WOT	42-45		
0-20 MPH Acceleration	on: 6.1 sec.		

Engine: 5.7 GXi DP			
RPM	MPH	ĠPH	RANGE*
2500	16	6.7	151
3500	30	10.9	173
WOT	43-46	_	

0-20 MPH Acceleration; 4.9 sec.

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

			ac 070			**1	TI
- 11	mor	lels of the	1.5 7/9	come ea	HINNER V	virn a :	•PAKPV"
	J. HIUL	ICID OF THE	UJ 2//	come cq	uippeu i		
	ent.	ellite com	municati	anc nicta	m which	includ	200
	Sau	emte com	munican	0113 34316	III AALIICI	micial	C),

■ Emergency messaging

■ Low voltage monitoring

■ Position monitoring via the ■ Water intrusion monitoring ■ Anti-theft protection

Internet

■ 24-hour telephone assistance

Sale Price

Boat		\$
Motor	_H.P.	
Trailer		
Accessories		•
T, T & L		

TOTAL PRICE \$

MerCruiser Sterndrive Engine Information

The following pages contain data about sterndrives offered in our 2004 product.

MODEL:

Horsepower at Prop Shaft Cylinders Cubic Inches Compression Ratio Max. Recommended RPM Lower Unit Gear Ratio Tilt Trim Length Width Height Weight

MODEL:

HODEL:
Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

HODEL:
Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

3.0L MERCRUISER

135 hp/101 kw.
4
181
9.3:1
4400-4800
2.0:1
Power
Power
23"
23"
22" (above crankshaft at CL)
635 lbs. (pkg. weight)

4.3L MERCRUISER

190 hp/142 kw. 6
262
9.4:1
4400.4800
1.81:1
Power
Power
33"
32"
21" (above crankshaft at CL)

848 lbs. (pkg. weight)

4.3L MPI MERCRUISER

220 hp/164 kw. 6 262 9.4:1 4400-4800 1.62:1 Power Power 33" 32" 21" (above cran)

33"
32"
21" (above crankshaft at CL)
865 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft Cylinders Cubic Inches Compression Ratio Max. Recommended RPM Lower Unit Gear Ratio Tilt Trim Length Width Height Weight

MODEL:

Horsepower at Prop Shaft Cylinders Cubic Inches Compression Ratio Max. Recommended RPM Lower Unit Gear Ratio Tilt Trim Length Width Height Weight

MODEL:

Horsepower at Prop Shaft Cylinders Cubic Inches Compression Ratio Max. Recommended RPM Lower Unit Gear Ratio Tilt Trim Length Width Height Weight

MODEL:

Horsepower at Prop Shaft Cylinders Cubic Inches Compression Ratio Max. Recommended RPM Lower Unit Gear Ratio Tilt Trim Length Width Height Weight

4.3L MPI BRAVO III MERCRUISER

220 hp/164 kw.

6 262 9.4:1 4400-4800 2.2:1 Power Power 33" 32" 21" (above crankshaft at CL) 921 lbs. (pkg. weight)

5.0L MERCRUISER

220 hp/164 kw. 8
305
9.4:1
4400-4800
1.62:1
Power
Power
29"
29"
400-4800 crankshaft at CL)
946 lbs. (pkq. weight)

5.0L MPI MERCRUISER

260 hp/194 kw.

305 9.4:1 4600-5000 1.62:1 Power Power 37" 29" 22" (above crankshaft CL) 952 lbs. (pkg. weight)

5.7L MERCRUISER

250 hp/186 kw. 8

350 9.4:1 4400-4800 1.47:1 Power Power 37" 29"

22" (above crankshaft at CL) 946 lbs. (pkg. weight)

GLASTRON 2005

MODEL:

Horsepower at Prop Shaft Cylinders Cubic Inches Compression Ratio Max. Recommended RPM Lower Unit Gear Ratio Tilt Trim Length Width Height

Weight MODEL:

Horsepower at Prop Shaft Cylinders Cubic Inches Compression Ratio Max. Recommended RPM Lower Unit Gear Ratio Tilt Trim Length Width Height

Weight MODEL:

Horsepower at Prop Shaft Cylinders Cubic Inches Compression Ratio Max. Recommended RPM Lower Unit Gear Ratio Tilt Trim Length Width Height Weight

MODEL:

Horsepower at Prop Shaft Cylinders Cubic Inches Compression Ratio Max. Recommended RPM Lower Unit Gear Ratio Tilt Trim Length Width Height Weight

5.7L BRAVO III MERCRUISER

250 hp/185 kw. 8
350
9.4:1
4400-4800
2.2:1
Power
Power
37"
29"
22" (above crankshaft at CL)

1013 lbs. (pkg. weight)

350 MAGNUM MPI ALPHA MERCRUISER

300 hp/ 224 kw. 8
8 350
9.4:1
4600-5000
1.47:1
Power
Power
37"
29"
22" (above crankshaft at CL)
952 lbs. (pkg. weight)

350 MAGNUM MPI BRAVO I MERCRUISER

300 hp/224 kw. 8 350 9.4:1 4600-5000 1.5:1 Power Power 37" 29" 22" (above crankshaft at CL) 993 lbs. (pkg. weight)

350 MAGNUM MPI BRAVO III MERCRUISER

300 hp/224 kw. 8 350 9.4:1 4600-5000 2.0:1 Power Power 77" 29" 22" (above crankshaft at CL) 1019 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft Cylinders Cubic Inches Compression Ratio Max. Recommended RPM Lower Unit Gear Ratio Tilt Trim Length Width Height Weight

MODEL:

Horsepower at Prop Shaft Cylinders Cubic Inches Compression Ratio Max. Recommended RPM Lower Unit Gear Ratio Tilt Trim Length Width Height Weight

MODEL:

Horsepower at Prop Shaft Cylinders Cubic Inches Compression Ratio Max. Recommended RPM Lower Unit Gear Ratio Tilt Trim Length Width Height Weight

MODEL:

Horsepower at Prop Shaft Cylinders Cubic Inches Compression Ratio Max. Recommended RPM Lower Unit Gear Ratio Tilt Trim Length Width Height

MX 6.2 MPI BRAVO I MERCRUISER

320 hp/239 kw.
8
377
9.0:1
4800-5200
1.65:1
Power
Power
37"
29"
22" (above crankshaft at CL)
993 lbs. (pkg. weight)

MX 6.2 MPI BRAVO III MERCRUISER

320 hp/239 kw.
8
377
9.0:1
4800-5200
2.2:1
Power
Power
37"
29"
22" (above crankshaft at CL)
1019 lbs. (pkg. weight)

496 MAGNUM MPI BRAVO I MERCRUISER

75 h/280 kw. 8
496
91:1
4400-4800
1.5:1
Power
Power
35"
33"
24" (above crankshaft at CL)
1199 lbs. (pkq. weight)

496 MAGNUM MPI BRAVO III MERCRUISER

375 hp/280 kw. 8 496 9.1:1 4400-4800 2.00:1 Power Power 35" 33"

24" (above crankshaft at CL) 1225 lbs. (pkg. weight)

Volvo Penta Sterndrive Engine Information

MODEL:

Horsepower at Prop Shaft Cylinders Cubic Inches Compression Ratio Max. Recommended RPM Lower Unit Gear Ratio Trim Lenath Width Height

Weight MODEL:

Horsepower at Prop Shaft . Cylinders Cubic Inches Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio Trim Length Width Height Weight

MODEL:

Horsepower at Prop Shaft Cubic Inches Compression Ratio Max. Recommended RPM Lower Unit Gear Ratio Trim Length Width Height

Weight MODEL:

Horsepower at Prop Shaft Cylinders Cubic Inches Compression Ratio Max. Recommended RPM Lower Unit Gear Ratio Trim Length Width Height

3.0 GL VOLVO PENTA

135 hp/100 kw. 181 4600 1.97:1 Power Power 33¾" 26%" 19" (above crankshaft at CL) 670 lbs. (pkg. weight)

4.3 GL VOLVO PENTA

190 hp/141 kw. 262 9.4:1 4600 1.79:1 Power 32¼" 31" 20¼" (above crankshaft at CL) 885 lbs. (pkg. weight)

4.3 GXI VOLVO PENTA

225 hp/168 kw. 9.4:1 4800 1.60:1 Power Power 22" (above crankshaft at CL) 907 lbs. (pkg. weight)

4.3 GXI DP VOLVO PENTA 225 hp/167 kw.

262 4800 1.95:1 Power Power 321/2 21" (above crankshaft at CL) 916 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft Cylinders Cubic Inches Compression Ratio Max. Recommended RPM Lower Unit Gear Ratio Trim Length Width Height Weight

MODEL:

724

Horsepower at Prop Shaft Cylinders Cubic Inches Compression Ratio Max. Recommended RPM Lower Unit Gear Ratio Trim Length Height Weight

MODEL:

Horsepower at Prop Shaft Cylinders Cubic Inches Compression Ratio Max. Recommended RPM Lower Unit Gear Ratio Trim Length Width Height Weight

MODEL:

Horsepower at Prop Shaft Cylinders Cubic Inches Compression Ratio Max. Recommended RPM Lower Unit Gear Ratio Trim Length Width Height

5.0 GL VOLVO PENTA

220 hp/164 kw. 305 1.60:1 Power Power 36¾" 281/4" 22" (above crankshaft at CL) 984 lbs. (pkg. weight)

5.0 GXI VOLVO PENTA

270 hp/201 kw. 305 9.4:1 5000 1.60:1 Power Power 37" 28½" 22" (above crankshaft at CL) 1031 lbs. (pkg. weight)

5.7 Gi VOLVO PENTA

280 hp/209 kw. 350 9.4:1 5000 1.51:1 Power Power 28¼" 22" (above crankshaft at CL) 1031 lbs. (pkg. weight)

5.7 Gi DP VOLVO PENTA

280 hp/209 kw. 8 350 9.4:1 5000 1.95:1 Power Power 37" 22" (above crankshaft at CL) 1040 lbs. (pkg. weight)

Weight

n n	•	-	57		
13/2	e n	11	1	P	٠

Horsepower at Prop Shaft Cylinders Cubic Inches Compression Ratio Max. Recommended RPM Lower Unit Gear Ratio Tilk Trim Length Width

Height Weight MODEL:

Horsepower at Prop Shaft Cylinders Cubic Inches Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio Trim Length Width

Height Weight

MODEL: Horsepower at Prop Shaft Cylinders Cubic Inches Compression Ratio Max. Recommended RPM Lower Unit Gear Ratio Tilt Tilt Trim Length Width Height Weight

5.7 GXi VOLVO PENTA 320 hp/239 kw.

8 350 9.4:1 5000 1.95:1 Power

Power Power 37" 28½" 22" (above crankshaft at CL) 1031 lbs. (pkg. weight)

5.7 GXi DP VOLVO PENTA 320 hp/239 kw.

350 9.4:1 5000 1.95:1 Power Power 37" 28¼" 22" (above crankshaft at CL) 1040 lbs. (pkg. weight)

8.1 Gi DP VOLVOPENTA 375 hp/280 kw. 8 496 9.1:1 4600 1.68:1 Power 1.05:1 Power Power 40.4" 32.8" 21.8" (above crankshaft at CL) 1258 lbs. (pkg. weight)

Glastron Boats
P. O. Box 460 • Little Falls, MN 56345
Phone 320/632-8395 • Fax 320/632-1438
www.glastron.com